

AN ISO 9001: 2008 CERTIFIED COMPANY

Felix

maintenance free

POWER FOR INDIA

Innovative Automotive & Invertor Batteries





About Us

FELIX has a long history in the manufacturing and development of Batteries. As FELIX grew, so did its product line, building up a tradition of reliable quality, durability and easy maintenance of its product ranges. Specializing in Automotive, Motorcycle Batteries and Tubular Stationery Batteries for UPS and Inverters with proven Tubular Technology and a range of other Batteries for Solar applications.

FELIX have recently established a new manufacturing facility with a modern and well equipped plant in Maharashtra.

Our manufacturing facilities comply with International standards and production requirements and an ISO 9001-2008 certified for quality standards. FELIX has a strong domestic marketing base across INDIA and is now poised to carter the International markets.

Our company provides logistics, flexibility and speed in all its operations to maximize customer satisfaction. This enables us to propose specific battery solutions for specific customer needs with one to one partnership. We can

develop specific batteries as per customer requirement and offer a flexible production schedule resulting in faster delivery.

FELIX Batteries give excellent value & are backed by technical support, committed deliveries with a highly efficient and quality range of Batteries for Solar, Inverters and UPS with total customer satisfaction. All FELIX Batteries are tested for performance to the Bureau of Indian Standards specifications. The company deploys skilled & trained staff on various pre & post production process assuring customers with quality, flawless and defect-free products.

Vision

Vision of our company is to improve and maintain high standards of productivity in every dimension of output whether manufacture, supply or after sales services. Company forward to move ahead along with its business associates along the way of success and is honest in its assurances.



Team Work

It has been the strong belief of FELIX that HUMAN RESOURCE AND RELATIONS are the most important assets of any human venture which can ultimately lead to outstanding progress or incredible failure.

Quality

Our quality policy to ensure that all our valued customers are provided with proper supplies of batteries which are manufactured in accordance with the best quality standards in a timely manner besides offering them the assurance of after sales services during the warranty span. Besides, FELIX has been sincerely following business ethics and all applicable Government rules and regulations.

Our Commitment to quality is rigourously monitored at every stage of production with a fully calibrated laboratory and testing facilities. It has been our endeavor to promote our quality policy within the organisation to give the maximum to our stakeholders in terms of quality products and after sales service in return for their continued trust in FELIX.

FELIX is committed to achieve and maintain high standards in respect of quality management as per ISO 9001-2008 standards and to make contineous improvements in all spheres of its business activities, procurement, prodction, quality, sales and after sales service along with lasting business relations with the vendors and customers.



Our Manufacturing Unit



Our Battery Range

*Automotive Batteries | High Power Tubular Batteries
Solar Application Batteries | 2 Volts Cell*



Features & Advantages

- **Electrolyte Level Indicator:** Low Maintenance of battery.
- **Ceramic Vent Plug:** Fitted with micro porous vent plugs for least environment pollutions / less or no topping up.
- **Low Resistance Enveloped P.E. Separators:** High porosity to ensure negligible and free circulation of Electrolyte.
- **Protection:** The ultra polypropylene container provide Exceptional protection with less bulk and weight as well as Heat-Resistant. The thin wall constrction also increases electrolyte capacity.
- **High acid volume per ampere hour:** Acid volume per ampere hour is more than ordinary batteries. It act as a coolant and also ensures very low maintenance.
- **Conformed to it's Specification:** Ensures consistant quality.

Applications

- UPS Systems
- Domestic Invertors
- EPABX
- Alarm Systems
- Hospitals
- Laboratory
- Solar & Wind Power Storage
- Elevator Backups
- Hotels
- Switchgear Operation (Substations)




High Performance Automotive & E-Rickshaw Batteries

Battery Type	Volt	Capacity		CCA (A)	RC (Min)	Max. Overall Dimension(mm) L x W x H	Layout	Terminal Type	Acid Vol.(Kg.) (Approx.)	Filled Wt.(Kg.) (Approx.)	Charging Current (Approx.)
		5hr (Ah)	20hr (Ah)								
NS40(32B20R)	12	26	32	300	36	195 x 125 x 224	1	B	3.5	10.9	3.0
NS40L(32B20L)	12	26	32	300	36	195 x 125 x 224	2	B	3.5	10.9	3.0
NS40Z(38B20R)	12	28	35	350	39	195 x 125 x 224	1	B	3.5	10.9	3.0
NS40ZL(38B20L)	12	28	35	350	39	195 x 125 x 224	2	B	3.5	10.9	3.0
N50Z(65D26R)	12	52	65	500	95	250 x 169 x 216	1	A	4.2	19.5	5.5
N50ZL(65D26L)	12	52	65	500	95	250 x 169 x 216	2	A	4.2	19.5	5.5
N70Z(75D31R)	12	60	75	610	116	304 x 167 x 225	1	A	5.3	21.3	6.0
N70ZL(75D31L)	12	60	75	610	116	304 x 167 x 225	2	A	5.3	21.3	6.0
N90Z(90D31R)	12	72	90	730	132	410 x 171 x 232	1	A	7.8	26.9	6.2
N100Z(105D31R)	12	80	100	600	150	410 x 171 x 232	1	A	7.5	27.6	7.0
N120Z(120F51R)	12	96	120	815	180	512 x 124 x 225	3	A	9.8	35.6	8.0
N135Z(135F51R)	12	108	135	700	215	512 x 124 x 225	3	A	13.8	37.1	8.5
N150Z(150G51R)	12	120	150	980	240	505 x 216 x 256	3	A	13.1	46.3	9.0
N165Z(165G51R)	12	132	165	940	265	518 x 250 x 241	3	A	16.9	53.5	10.0
N180Z(180G51R)	12	144	180	970	288	518 x 250 x 241	3	A	16.2	56.2	12.0
N200Z(190H52R)	12	160	200	1160	370	518 x 250 x 241	3	A	18.1	60.2	13.5

Battery Type	Volt	Capacity		CCA (A)	RC (Min)	Max. Overall Dimension(mm) L x W x H	Layout	Terminal Type	Acid Vol.(Kg.) (Approx.)	Filled Wt.(Kg.) (Approx.)	Charging Current (Approx.)
		5hr (Ah)	20hr (Ah)								
Din 44	12	35	44	360	190	210 x 173 x 190	2	A	3.4	11.6	3.0
Din 55	12	44	55	430	235	242 x 175 x 190	2	A	4.2	19.5	5.5
Din 66	12	53	66	510	280	277 x 175 x 190	2	A	5.5	19.4	5.0
Din 88	12	70	88	630	350	353 x 175 x 190	2	A	7.2	23.5	6.0

For
European
Vehicles
(DIN)

Battery Type	Volt	Capacity 20hr (Ah)	Dimension (mm) L x W x H	Layout	Terminal Type	Acid Vol.(Kg.) (Approx.)	Filled Wt.(Kg.) (Approx.)	Charging Current (Approx.)
2.5 LC	12	2.5	81 x 71 x 105	2	A	0.24	0.99	2.0
4 B	12	4	110 x 65 x 83	2	A	0.30	1.24	2.0
5 LB	12	5	118 x 58 x 130	2	A	0.39	1.81	2.0
7 LB	12	7	146 x 58 x 130	1	A	0.47	2.25	3.0
9 B	12	9	132 x 72 x 138	1	A	0.66	2.94	3.0


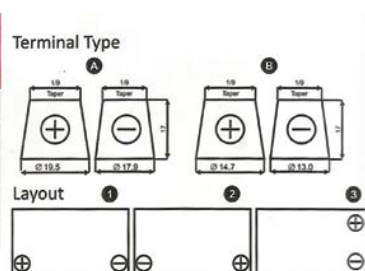


For Motor
Cycle
Batteries

High Power Tubular Batteries

Tubular Series IT/SB

Type of Batteries	Voltage	Capacity 20 Hr. (AH)	Container Type	Maximum Overall Dimension (mm) L x W x H	Acid Volume (Kg.) (Approx.)	Filled Weight (Kg.) (Approx.)	Charging Current (Approx.)
IT-100	12	100	IT-500	503 x 188 x 405	21.0	55	8.0 Amp
IT-120	12	120	IT-500	503 x 188 x 405	20.5	57	9.5 Amp
IT-150	12	150	IT-500	503 x 188 x 405	19.8	60	12.0 Amp
IT-180	12	180	IT-500	503 x 188 x 405	18.8	62	14.5 Amp
IT-200	12	200	IT-500	503 x 188 x 405	18.0	64	16.0 Amp
IT-240	12	240	IT-500	503 x 188 x 405	17.0	68	18.0 Amp
SB-100	12	100	N200 Jumbo	515 x 486 x 285	22.0	51	8.0 Amp
SB-120	12	120	N200 Jumbo	515 x 486 x 285	21.2	53	9.5 Amp
SB-150	12	150	N200 Jumbo	515 x 486 x 285	20.5	56	12.0 Amp
SB-180	12	180	N200 Jumbo	515 x 486 x 285	20.0	60	14.5 Amp

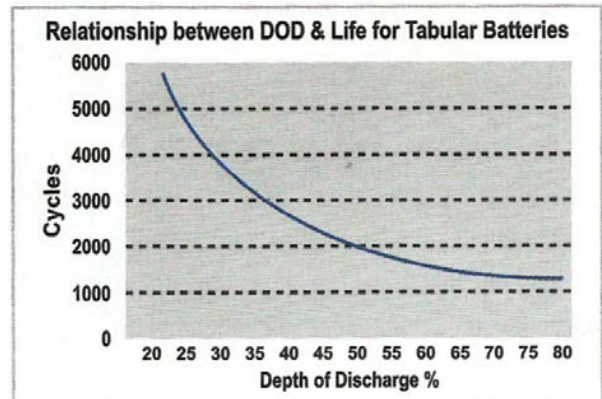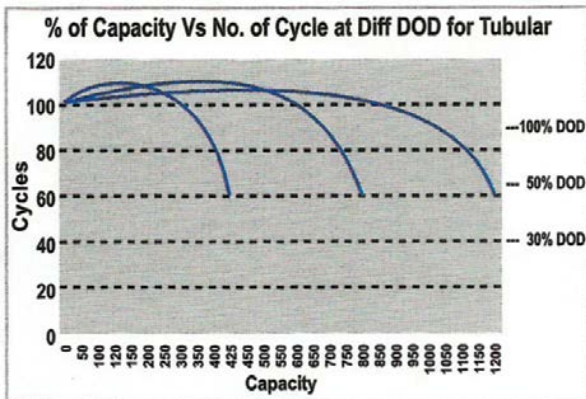


Solar Applicable Batteries

Heavy Duty Solar Series SB

TECHNICAL SPECIFICATIONS

Type of Batteries	Voltage	Capacity 10 Hr. (AH)	Container Type	Maximum Overall Dimension (mm) L x W x H	Acid Volume (Kg.) (Approx.)	Filled Weight (Kg.) (Approx.)	Charging Current (Approx.)
SB-20	12	20	N50	159 x 169 x 216	8.0	19	2.0 Amp
SB-40	12	40	N100	410 x 171 x 232	10.0	25	3.0 Amp
SB-60	12	60	N100	410 x 171 x 232	12.0	32	4.5 Amp
SB-80	12	80	N120	512 x 124 x 225	13.0	36	6.0 Amp
SB-100	12	100	N150	505 x 216 x 256	15.0	42	7.5 Amp
SB-120	12	120	N200 Jumbo	515 x 486 x 285	20.5	56	9.9 Amp
SB-150	12	150	N200 Jumbo	515 x 486 x 285	20.0	60	11.5 Amp
IT-100	12	100	IT-500	503 x 188 x 405	20.5	55	8.0 Amp
IT-150	12	150	IT-500	503 x 188 x 405	18.8	60	12.0 Amp
IT-200	12	200	IT-500	503 x 188 x 405	17.0	68	16.0 Amp

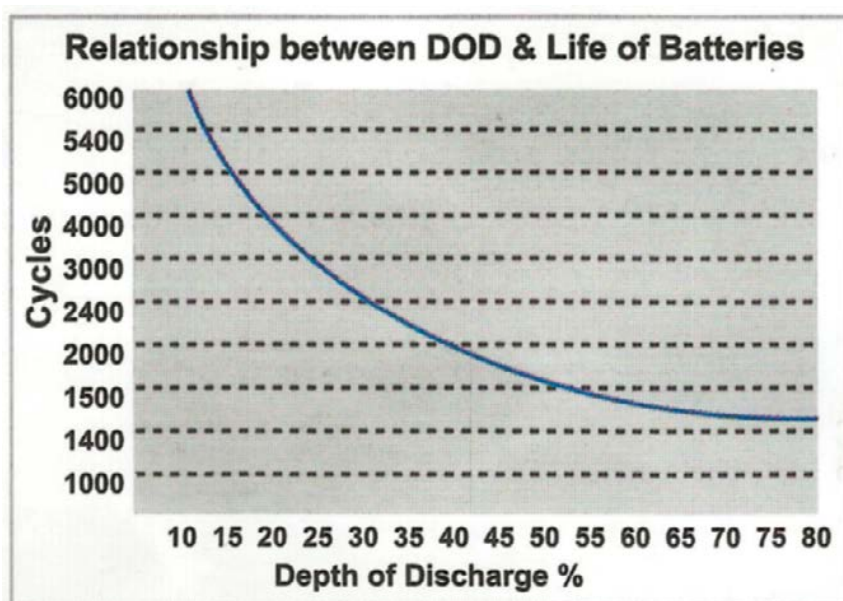

2 Volt Cell

Series ES

TECHNICAL SPECIFICATIONS

Type of Batteries	Voltage & Capacity	No. of Terminals Per Cell		Maximum Overall Dimension (mm) L x W x H	Cell Dry Wt. (Kgs.) (Approx.)	Cell Filled Wt. (Kg.) (Approx.)	Acid Vol.(Ltr.) (Approx.)
		+ve	-ve				
2 ES 50	2 V 100 AH	1	1	103 x 206 x 420	8.600	13.500	4.0
3 ES 50	2 V 150 AH	1	1	103 x 206 x 420	10.700	15.200	3.6
4 ES 50	2 V 200 AH	1	1	103 x 206 x 420	12.500	16.716	3.4
5 ES 50	2 V 250 AH	1	1	124 x 206 x 420	14.900	20.356	4.4
6 ES 50	2 V 300 AH	1	1	145 x 206 x 420	17.700	23.280	4.5
5 ES 70	2 V 350 AH	1	1	124 x 206 x 570	20.600	27.668	5.7
6 ES 70	2 V 420 AH	1	1	145 x 206 x 570	23.500	32.552	7.3
7 ES 70	2 V 490 AH	1	1	166 x 206 x 570	28.100	38.516	8.4
6 ES 100	2 V 600 AH	1	1	145 x 206 x 745	31.100	47.344	13.1
8 ES 100	2 V 800 AH	2	2	191 x 210 x 745	44.200	61.808	14.2
10 ES 100	2 V 1000 AH	2	2	233 x 210 x 745	51.000	71.584	16.6
12 ES 100	2 V 1200 AH	2	2	275 x 210 x 745	66.600	90.904	19.6

Sp. Gr. of operation / Testing 1.240+/-0.005 at 27 Degree Celsius

Cells in above capacities meeting the following criteria available for the Indian Market

Relationship between capacity and discharge rate w.r.t. time


Hours	10	9	8	7	6	5	4	3	2	1
Capacity %	100	97.9	95.0	91.7	87.9	83.3	78.2	71.7	63.3	50.0
Final Voltage	1.85	1.84	1.84	1.83	1.83	1.82	1.81	1.80	1.78	1.75

Conventional Low Maintenance Type

- Optimum power and Reliability. Workhorse battery engineered to withstand vibration and deliver higher cranking power.
- Conventional manifold battery.
- Case made of polypropylene for easy maintenance full frame case antimicrobial plate for long life.
- Thicker grade connecting parts for reliable starting power.
- Technical grade electrolyte for efficient power delivery.
- Through partition construction delivers maximum power.
- Thermally bonded case and cover protects against seepage and corrosion.

High Performance Type

- PE separator, polyethylene sheet bonded for compression to withstand severe vibration condition.
- High technology separator allow extra plates per cell to be installed for improvement in cranking performance.

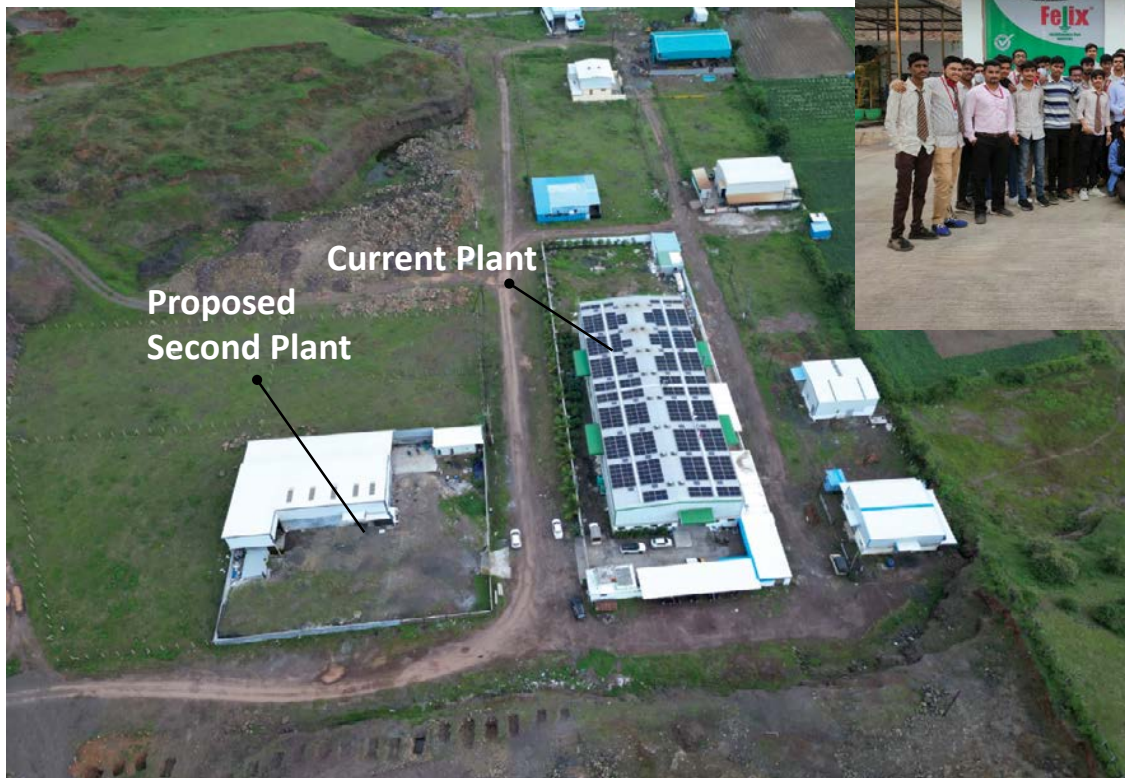

FELIX BATTERIES INDUSTRIES

Gat No.: 473/2/3/4, Shinde Bramhanwada
Road, Shinde, Dist. Nashik 422102