



ALLIED ISPAT

**Building & Construction
Materials Trading Co. LLC**



GYPSPUS PRO-CORE

CORE STRENGTH, PERFECT FINISH



*The above certifications shown are held by Allied Ispat Pvt. Ltd.






ABOUT US

Allied Ispat LLC, a division of the renowned Allied Ispat Pvt. Ltd , extends over 50 years of experience in the iron and steel industry to the UAE and GCC markets. Originally incorporated in India in 1997, Allied Ispat has built a strong reputation as a manufacturer and supplier of Drywall Steel Partitions, Ceiling sections, and Rolling Shutter Parts. Now expanding into the UAE, we specialize in building materials for False Ceilings and Drywall Partitions Profiles. We provide complete interior finishing solutions, catering to the diverse needs of building construction projects across the region.

What sets us apart is our ability to provide customized solutions tailored to the specific needs of each project. Whether for commercial or residential buildings, our range of False Ceiling and Drywall Partition products are designed to offer ease of installation, enhanced durability, and aesthetic versatility, catering to the evolving needs of modern construction. With Allied Ispat LLC, we aim to bring our legacy of excellence to the UAE and GCC markets, delivering premium building materials and reliable service that construction professionals can count on.

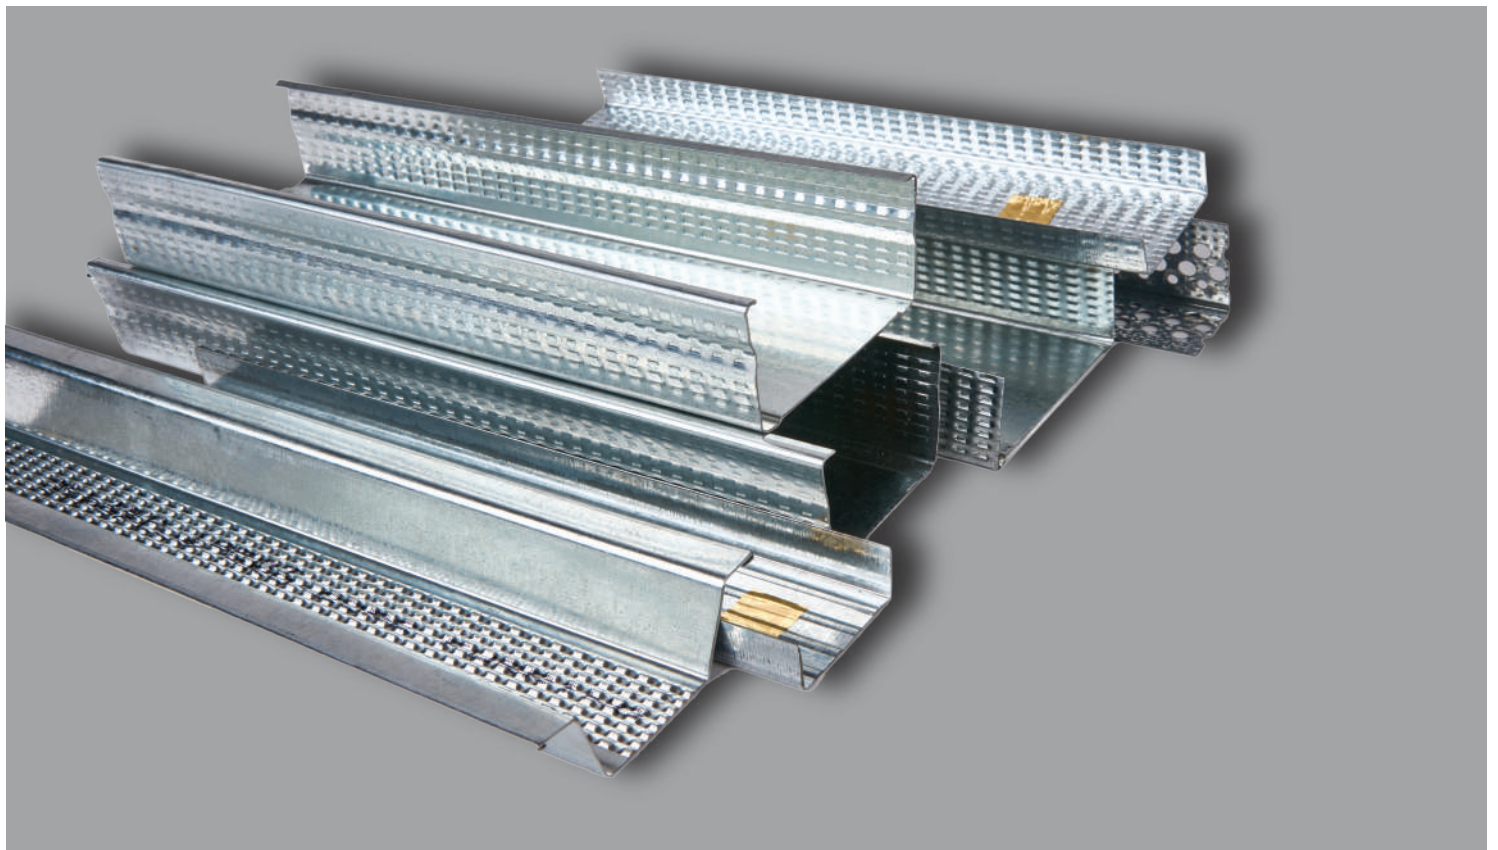

Our Mission

Allied Ispat LLC brings over five decades of industry expertise and excellence from India. Our mission is to deliver high-quality building materials that meet the evolving demands of modern construction. We are committed to ensuring customer satisfaction by consistently providing durable, innovative solutions that stand the test of time. Our legacy is built on adaptability, operational excellence, and a dedication to forming lasting partnerships with our clients, suppliers, and stakeholders.

Our Vision

Our vision is to establish Allied Ispat LLC as a trusted name in the UAE and GCC, known for our unwavering commitment to quality and customer-centric approach. By leveraging our extensive experience and proven ability to navigate changing business environments, we aim to become industry leaders in delivering top-tier construction materials. We aspire to raise the standards of quality and innovation while ensuring the success of every project we are a part of, fostering long-term relationships based on trust and collaboration.



FURRING CEILING SYSTEM

FURRING CHANNEL

MAIN CHANNEL

L-ANGLE


PERIMETER

Furring Ceiling System


System Components




FURRING CHANNEL



Ref	Dimensions A B C			Standard Thickness Upto	Standard Length	Material	Bundle
35 FC	35	22	68	0.40 to 0.90 mm	3000	G.I.	25
50 FC	50	22	85	0.40 to 0.90 mm	3000	G.I.	25

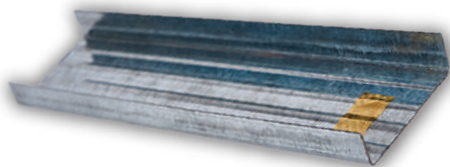


MAIN CHANNEL



Ref	Dimensions A B C			Standard Thickness Upto	Standard Length	Material	Bundle
38 MC	12	38	12	0.40 to 0.90 mm	3000	G.I.	20




L-ANGLE



Ref	Dimensions A B		Standard Thickness Upto	Standard Length	Material	Bundle
LA 25	25	25	0.40 to 1.50 mm	3000	G.I.	25
LA 18	18	18	0.40 to 0.90 mm	3000	G.I.	25



PERIMETER CHANNEL



Ref	Dimensions A B C			Standard Thickness Upto	Standard Length	Material	Bundle
21 PC	18	28	21	0.40 to 0.90 mm	3000	G.I.	20

*G.I – Galvanized Iron *PPGI– Prepainted Galvanized
*G.L – Galvalume Iron *PPGL – Prepainted Galvalume



DRYWALL PARTITION SYSTEM

STUD


TRACK

DEEP TRACK

Partition System by GypsPlus Pro-Core

The GypsPlus Pro-Core Drywall Partition System is a robust metal framework comprising high-quality studs, ceiling tracks, and floor tracks. Specifically designed to work with single or double layers of gypsum wallboards, this system offers a flexible solution for creating solid partitions in both residential and commercial buildings. With a range of available widths, our studs and tracks ensure versatility in design while maintaining strength and durability.

For projects requiring additional structural support, our studs can be combined into a box configuration for increased strength. Each stud features a textured surface, ensuring precise screw placement, which simplifies installation and reduces time and effort for contractors. The GypsPlus Pro-Core Drywall Partition System guarantees reliable performance and adaptability, meeting the evolving demands of today's construction industry.

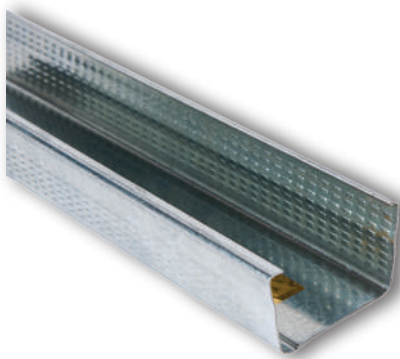

STUD




Ref	Dimensions			Standard Thickness Upto	Standard Length	Material	Bundle
	A	B	C				
SP 50	50	34	32	0.40 to 0.90 mm	3000	G.I.	20
SP 70	70	34	32	0.40 to 0.90 mm	3000	G.I.	20
SP 98	98	34	32	0.40 to 0.90 mm	3000	G.I.	20
SP 148	148	34	32	0.40 to 0.90 mm	3000	G.I.	20

...Special Lengths are available upon request

DEEP TRACK


Ref	Dimensions			Standard Thickness Upto	Standard Length	Material	Bundle
	A	B	C				
SFT 52	52	32	32	0.40 to 0.90 mm	3000mm	G.I.	20
SFT 72	72	32	32	0.40 to 0.90 mm	3000mm	G.I.	20
SFT 100	100	32	32	0.40 to 0.90 mm	3000mm	G.I.	20
SFT 150	150	32	32	0.40 to 0.90 mm	3000mm	G.I.	20

...Special Lengths are available upon request

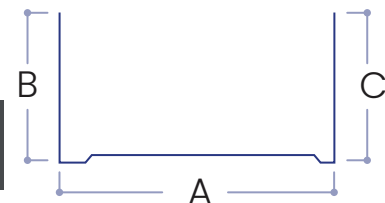


*G.I - Galvanized Iron *PPGI- Prepainted Galvanized
*G.L - Galvalume Iron *PPGL - Prepainted Galvalume

Drywall Partition System

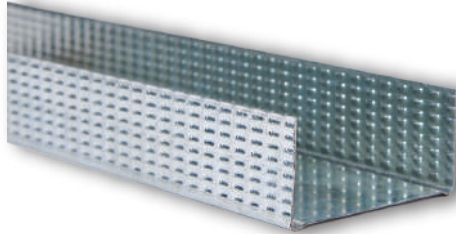


TRACK

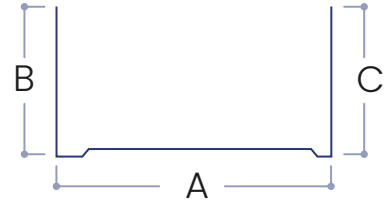


Ref	Dimensions			Standard Thickness Upto	Standard Length	Material	Bundle
	A	B	C				
SF 52	52	25	25	0.40 to 0.90 mm	3000mm	G.I.	20
SF 72	72	25	25	0.40 to 0.90 mm	3000mm	G.I.	20
SF 100	100	25	25	0.40 to 0.90 mm	3000mm	G.I.	20
SF 150	150	25	25	0.40 to 0.90 mm	3000mm	G.I.	20


...Special Lengths are available upon request

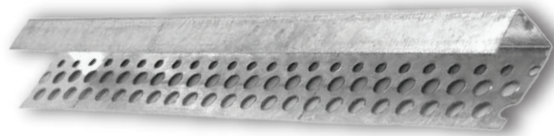


BOARD PROTECTION CHANNEL



Ref	Dimensions			Standard Thickness Upto	Standard Length	Material	Bundle
	A	B	C				
BC 1	26	13	10	0.40 to 0.90 mm	3000mm	G.I.	20

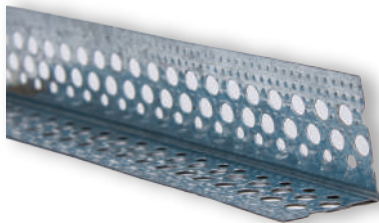


CORNER BEAD CHANNEL (PERFORATED)



Ref	Dimensions			Standard Thickness Upto	Standard Length	Material	Bundle
	A	B	C				
BC 2	30	2.5	30	0.30 to 0.45 mm	3000mm	G.I.	20

*G.I - Galvanized Iron *PPGI- Prepainted Galvanized
*G.L - Galvalume Iron *PPGL - Prepainted Galvalume

System Accessories



SCREWS & FASTENERS

Ref	Dimensions
SF 1	6 x 1"
SF 2	6 x 1.25"
SF 3	6 x 1.5"
SF 4	6 x 2"
SF 5	8 x 2"

Ref	Dimensions
SF 6	8 x 2.5"
SF 7	8 x 3"
SF 8	10 x 4"
SF 9	10 x 5"



ACCESS PANELS

Ref	Dimensions
AP 1	200mm x 200mm
AP 2	300mm x 300mm
AP 3	400mm x 400mm

Ref	Dimensions
AP 4	450mm x 450mm
AP 5	500mm x 500mm
AP 6	600mm x 600mm

Technical Specification Clauses

Raw Material

Galvanized Iron complying with

Zinc Coating Type:

Standards

IS 277:2018/ASTM 653
(EQ: BS EN 10346:2009)


BOTH SIDE 80,120,275 GSM
Pre Galvanized.

Manufacturing

Dry Wall Partition System &
Furring Ceiling System

Standards

EQ: BS EN 14195:2014/
ASTM C645

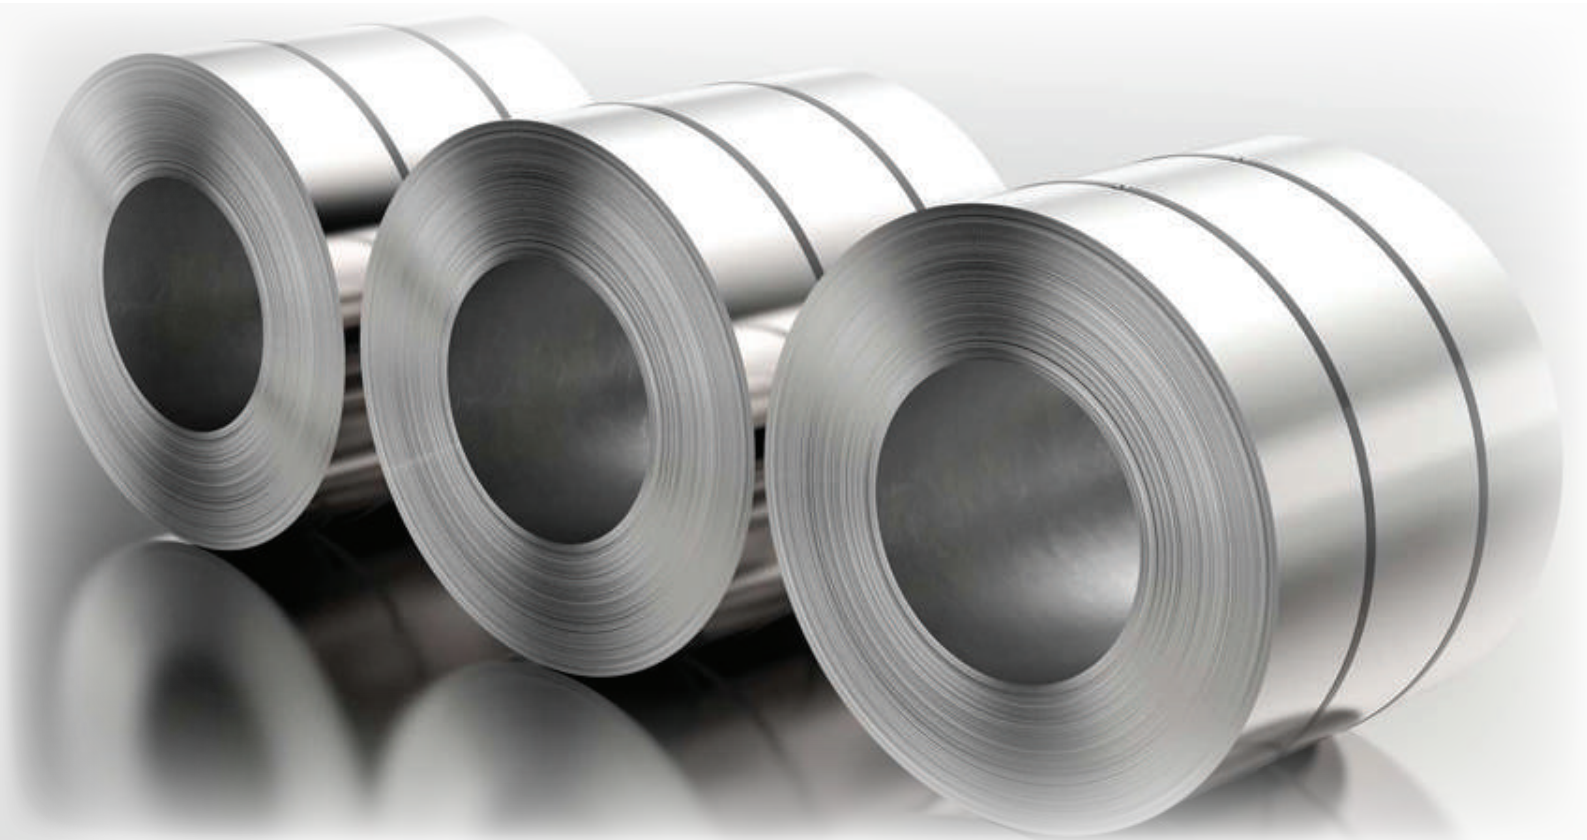

ALLIED

Address:

United Arab Emirates (UAE)

F19-293 Al Suaidi, Al Marrar, Dubai

India

C-17/9 MIDC Talaja, Maharashtra India



CONTACT:

Irshad Malik: +971 55 298 9815

Arbaaz Malik: +971 55 327 8988

Made in India for UAE



www.alliedispat.ae



info@alliedispat.ae