

VAYN shoulder · milling drawing · 32 Carrier-2 rear

FRONT · Z horizontal, +X up

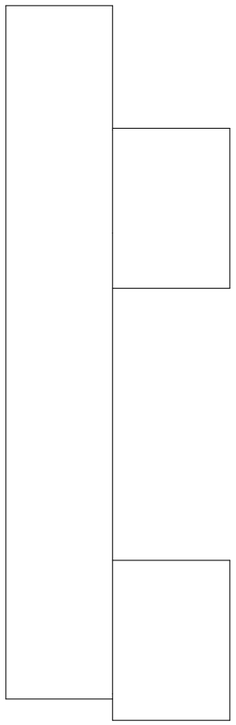


scale 1.74:1 view span 21.0 × 67.0 mm

END · from the arm side (+Z)

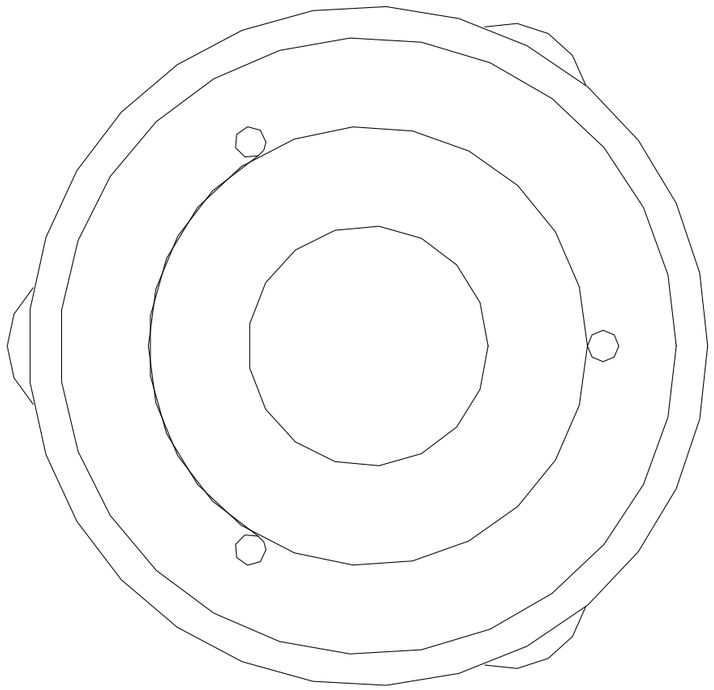


scale 1.70:1 view span 67.0 × 64.9 mm

SIDE · Z horizontal, +Y up

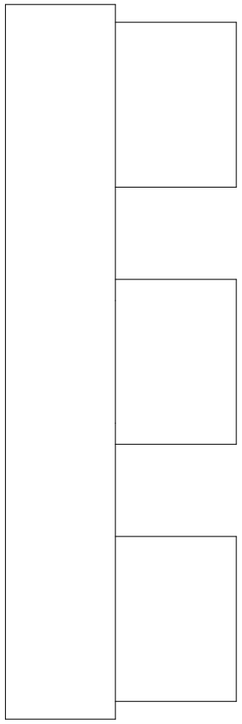

scale 1.79:1 view span 21.0 × 65.0 mm

ISOMETRIC

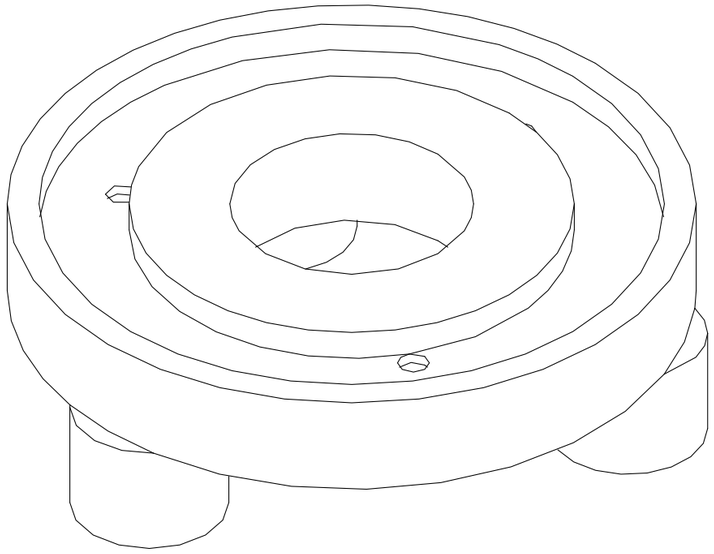

scale 1.73:1 view span 66.1 × 51.2 mm

32

Carrier-2 rear

Quantity in this actuator: 1
Material: 42CrMo4
Group: Around the gears
Finished size: Hub Ø65 × 10 mm, envelope about Ø67 × 21 mm
Mass: 232.26 g each
Model bounding box, X × Y × Z: 67.0 × 65.0 × 21.0 mm
Raw stock: Same EN19 bar
Process: CNC mill
Heat treatment / finish: Already quenched and tempered, 28–34 HRC. Do not nitride.
STEP solid: 32 Carrier-2 rear (42CrMo4)

Controlled features

- Hub Ø65 j5, rear inner-ring seat.
- 3 × Ø8 mm R7 holes on Ø45 mm, 6 mm deep, ending on a 1.0 mm shoulder.
- Ø3 mm hole through each shoulder, for venting and punch-out.
- Rear lightening groove Ø42–Ø59 mm, 3 mm deep. It must not break the pin shoulder.
- Posts tapped M4. Post faces are the inner-ring shoulders.

STEP file is the geometric master. Do not scale this sheet. Sizes not listed here follow ISO 2768-1 class m and ISO 2768-2 class K. Drawing 32_carrier_2_rear.pdf