

VAYN shoulder · milling drawing · 15 Housing

FRONT · Z horizontal, +X up

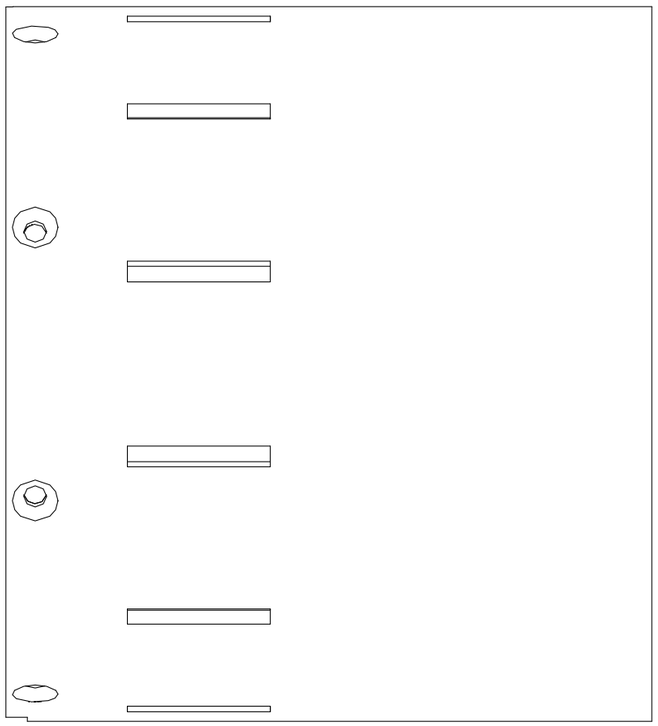


scale 1.17:1 view span 90.4 × 100.0 mm

END · from the arm side (+Z)

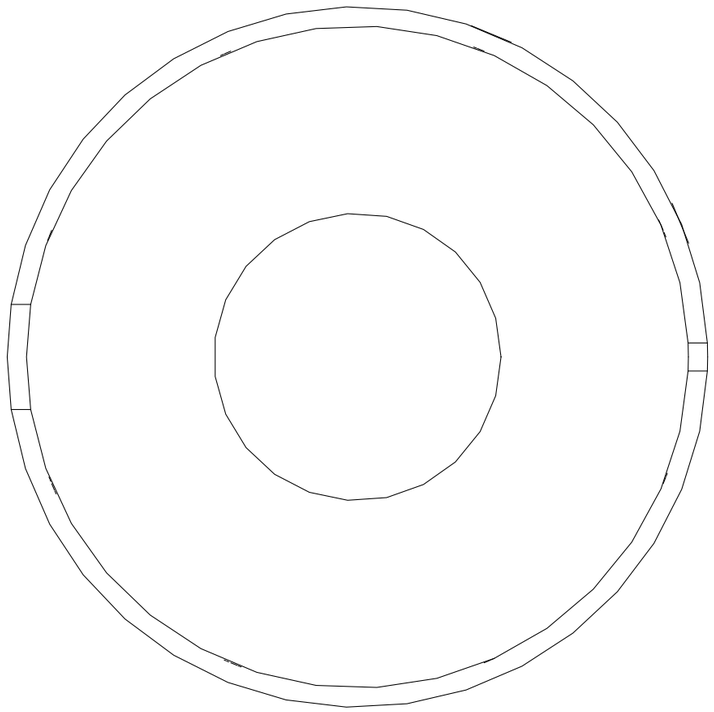


scale 1.14:1 view span 100.0 × 100.0 mm

SIDE · Z horizontal, +Y up

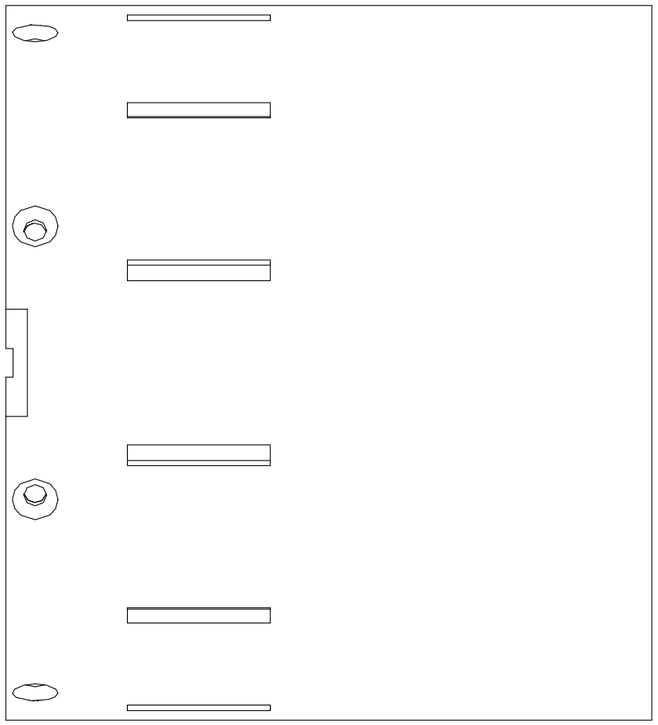

scale 1.17:1 view span 90.4 × 100.0 mm

ISOMETRIC

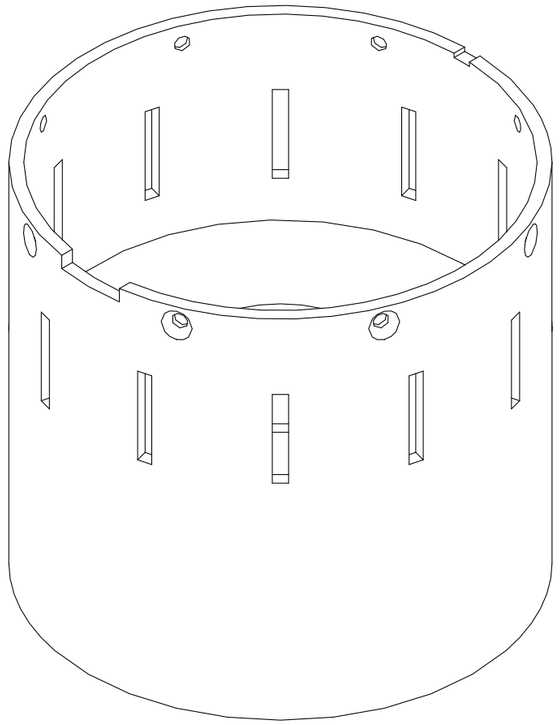

scale 1:1.13 view span 100.0 × 131.5 mm

15

Housing

Quantity in this actuator: 1
Material: 6082-T6
Group: Housing family
Finished size: Ø100 × 90.4 mm, from Z 2 to Z 92.4
Mass: 349.34 g each
Model bounding box, X × Y × Z: 100.0 × 100.0 × 90.4 mm
Raw stock: Ø105 × 100 mm 6082-T6 bar
Process: CNC lathe and mill, 4th axis for the radial holes
Heat treatment / finish: No anodize. Leave the fits and the threads bare.
STEP solid: 15 Housing (6082-T6)

Controlled features

- Rear bore Ø94.5, open through the rear face. Plate plug seats from Z 2 to Z 18.4.
- 8 × Ø3.2 radial holes with 90° countersinks at Z 6.1, centres 0.1 mm forward of the plug threads.
- Rear-face notches 4 × 1 mm at 0° and 15 × 3 mm at 180°.
- Partition 2.5 mm, Z 48.4 to Z 50.9. Labyrinth Ø41.0 H8.
- Ring-1 bore Ø85 K6. Cartridge bore Ø89 G7.
- 12 cooling slots, 3 × 20 mm. Two ring-1 dowel slots, width 3.02–3.04 mm, 1.5 mm deep.
- 8 × M3 in the front face, 6 mm thread engagement.

STEP file is the geometric master. Do not scale this sheet. Sizes not listed here follow ISO 2768-1 class m and ISO 2768-2 class K. Drawing 15_housing.pdf