

VAYN shoulder · milling drawing · 06 Magnet holder

FRONT · Z horizontal, +X up

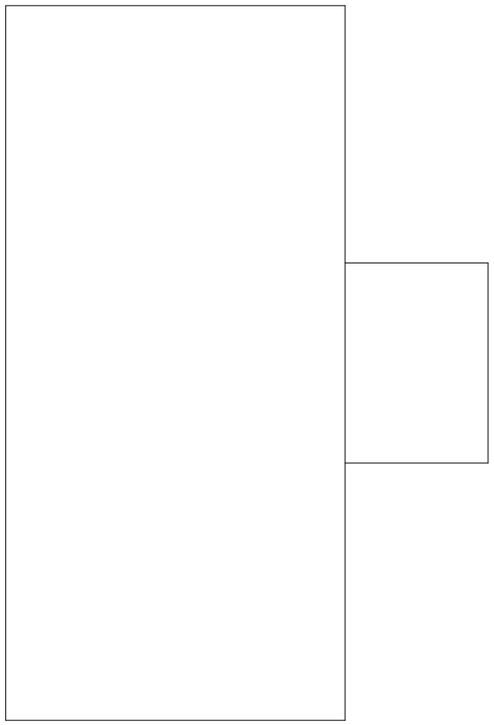


scale 11.65:1 view span 6.8 × 10.0 mm

END · from the arm side (+Z)

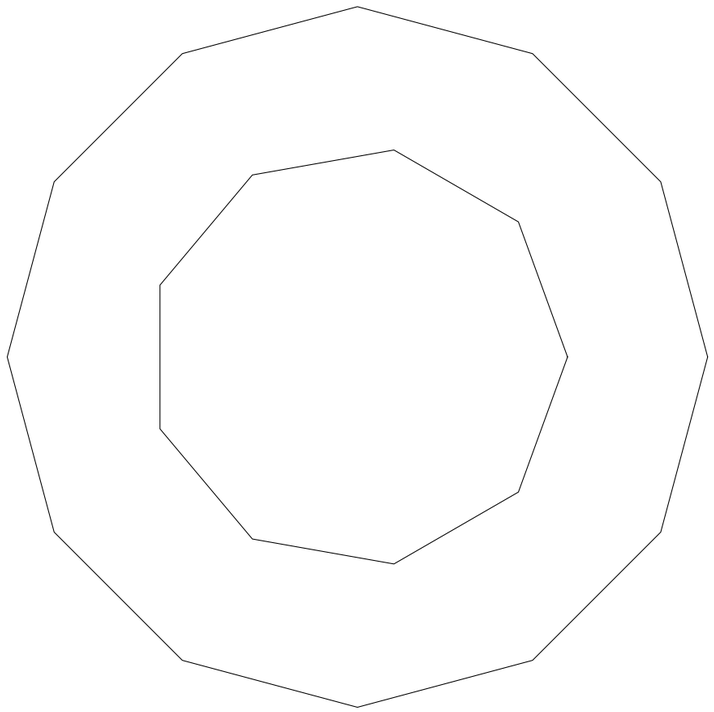


scale 11.42:1 view span 10.0 × 10.0 mm

SIDE · Z horizontal, +Y up

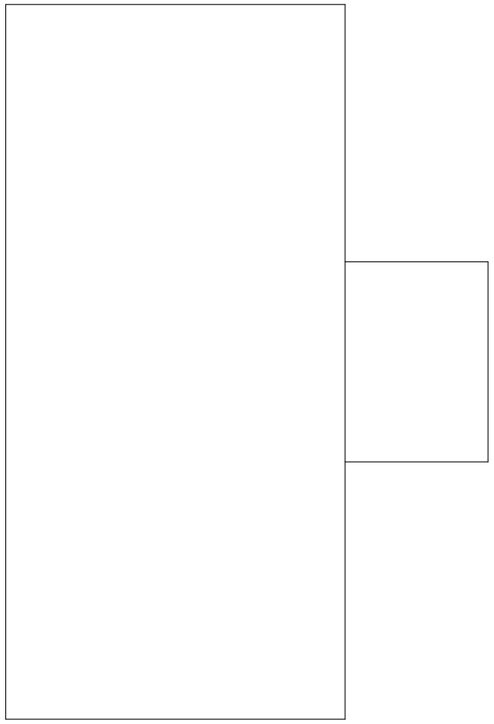

scale 11.65:1 view span 6.8 × 10.0 mm

ISOMETRIC

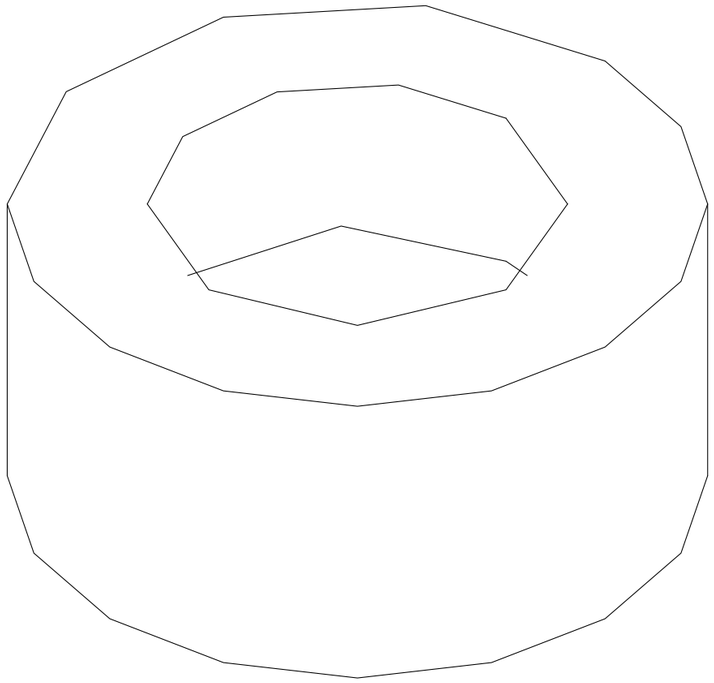

scale 11.42:1 view span 10.0 × 9.6 mm

06

Magnet holder

Quantity in this actuator: 1
Material: 6082-T6
Group: Housing family
Finished size: Ø10 × 4.75 mm, pin Ø2.8 × 2 mm
Mass: 0.85 g each
Model bounding box, X × Y × Z: 10.0 × 10.0 × 6.8 mm
Raw stock: Ø12 × 40 mm 6082-T6 bar
Process: CNC lathe
Heat treatment / finish: No anodize
STEP solid: 06 Magnet holder (6082-T6)

Controlled features

- Must stay non-magnetic. 6082 is an aluminium-silicon-magnesium alloy and is non-magnetic.
- Magnet pocket Ø6 × 2.5 mm in the rear face.
- Pin Ø2.8 is a stand-in. Turn the pin to the measured rotor-cap hole, clearance 0–0.02 mm.
- Pocket concentric to the pin within 0.03 mm TIR.

STEP file is the geometric master. Do not scale this sheet. Sizes not listed here follow ISO 2768-1 class m and ISO 2768-2 class K. Drawing 06_magnet_holder.pdf