

VAYN shoulder · milling drawing · 42 Carrier-2 front

FRONT · Z horizontal, +X up




scale 1.49:1 view span 14.0 × 78.0 mm

END · from the arm side (+Z)

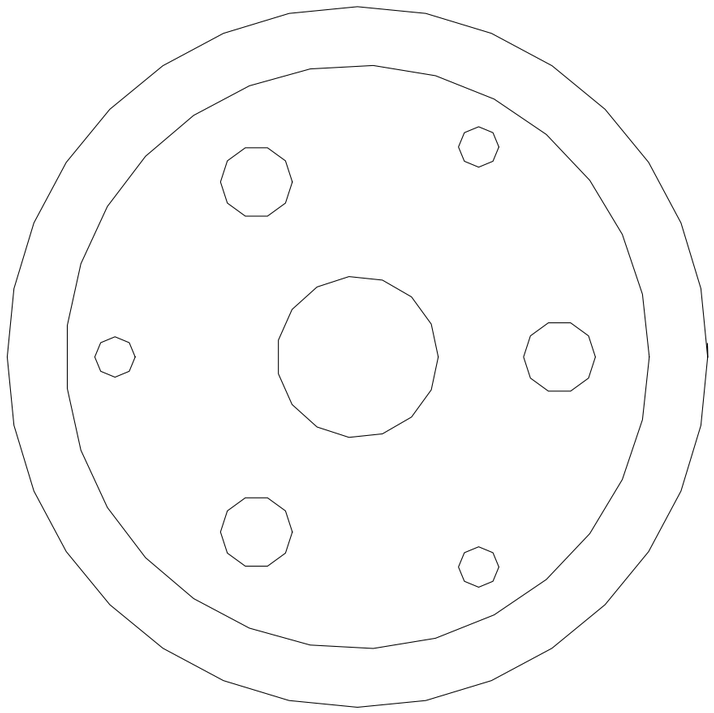


scale 1.46:1 view span 78.0 × 78.0 mm

SIDE · Z horizontal, +Y up



scale 1.49:1 view span 14.0 × 78.0 mm

ISOMETRIC

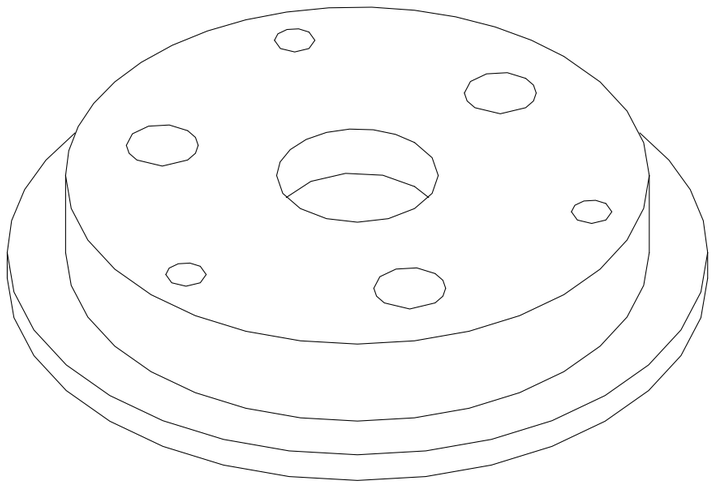

scale 1.46:1 view span 78.0 × 52.7 mm

42

Carrier-2 front

Quantity in this actuator: 1
Material: 20MnCr5
Group: Carriers
Finished size: Flange Ø78 mm, hub Ø65 mm, overall 14 mm
Mass: 313.67 g each
Model bounding box, X × Y × Z: 78.0 × 78.0 × 14.0 mm
Raw stock: Same 20MnCr5 bar
Process: CNC lathe and mill
Heat treatment / finish: Leave annealed. Do not carburize. The M5 arm threads are in this steel.
STEP solid: 42 Carrier-2 front (20MnCr5)

Controlled features

- Hub Ø65 j5, front inner-ring seat.
- 6 × M5 tapped, 8 mm deep, on Ø52 mm.
- Pilot Ø40 H7 × 2 mm. Runout within 0.02 mm TIR. Face flatness within 0.03 mm.
- 3 × Ø8 mm R7 holes, blind 6.3 mm deep.
- 3 × M4 counterbores on Ø54 mm.
- Ø3 mm radial hole in the rim at Z 98.75 for the homing magnet.

STEP file is the geometric master. Do not scale this sheet. Sizes not listed here follow ISO 2768-1 class m and ISO 2768-2 class K. Drawing 42_carrier_2_front.pdf