LLC isolation stage

File: llc.kicad_sch

Primary aux supply and CA-IS3642 isolato

File: pri_aux.kicad_sch

4SBB regulator

File: sbb.kicad_sch

Secondary aux supplies

File: sec_aux.kicad_sch

STM32G474RBT6 MCU

File: mcu.kicad_sch

Sensing

File: sense.kicad_sch

Isolated CAN

File: can.kicad_sch

Address switch, programming pads, ARM SW


File: io.kicad_sch

Sheets connect through global labels and power symbols
Isolated 12-48 V -> 1.5-48 V / 5 A / 50 W; STM32G474RBT6; isolated CAN

Sheet: /
File: DCDC_LLC_4SBB_G474.kicad_sch

Title: DCDC LLC + 4SBB G474 - top level

Size: A3	Date: 2026-10-17	**Rev: C**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 1/9

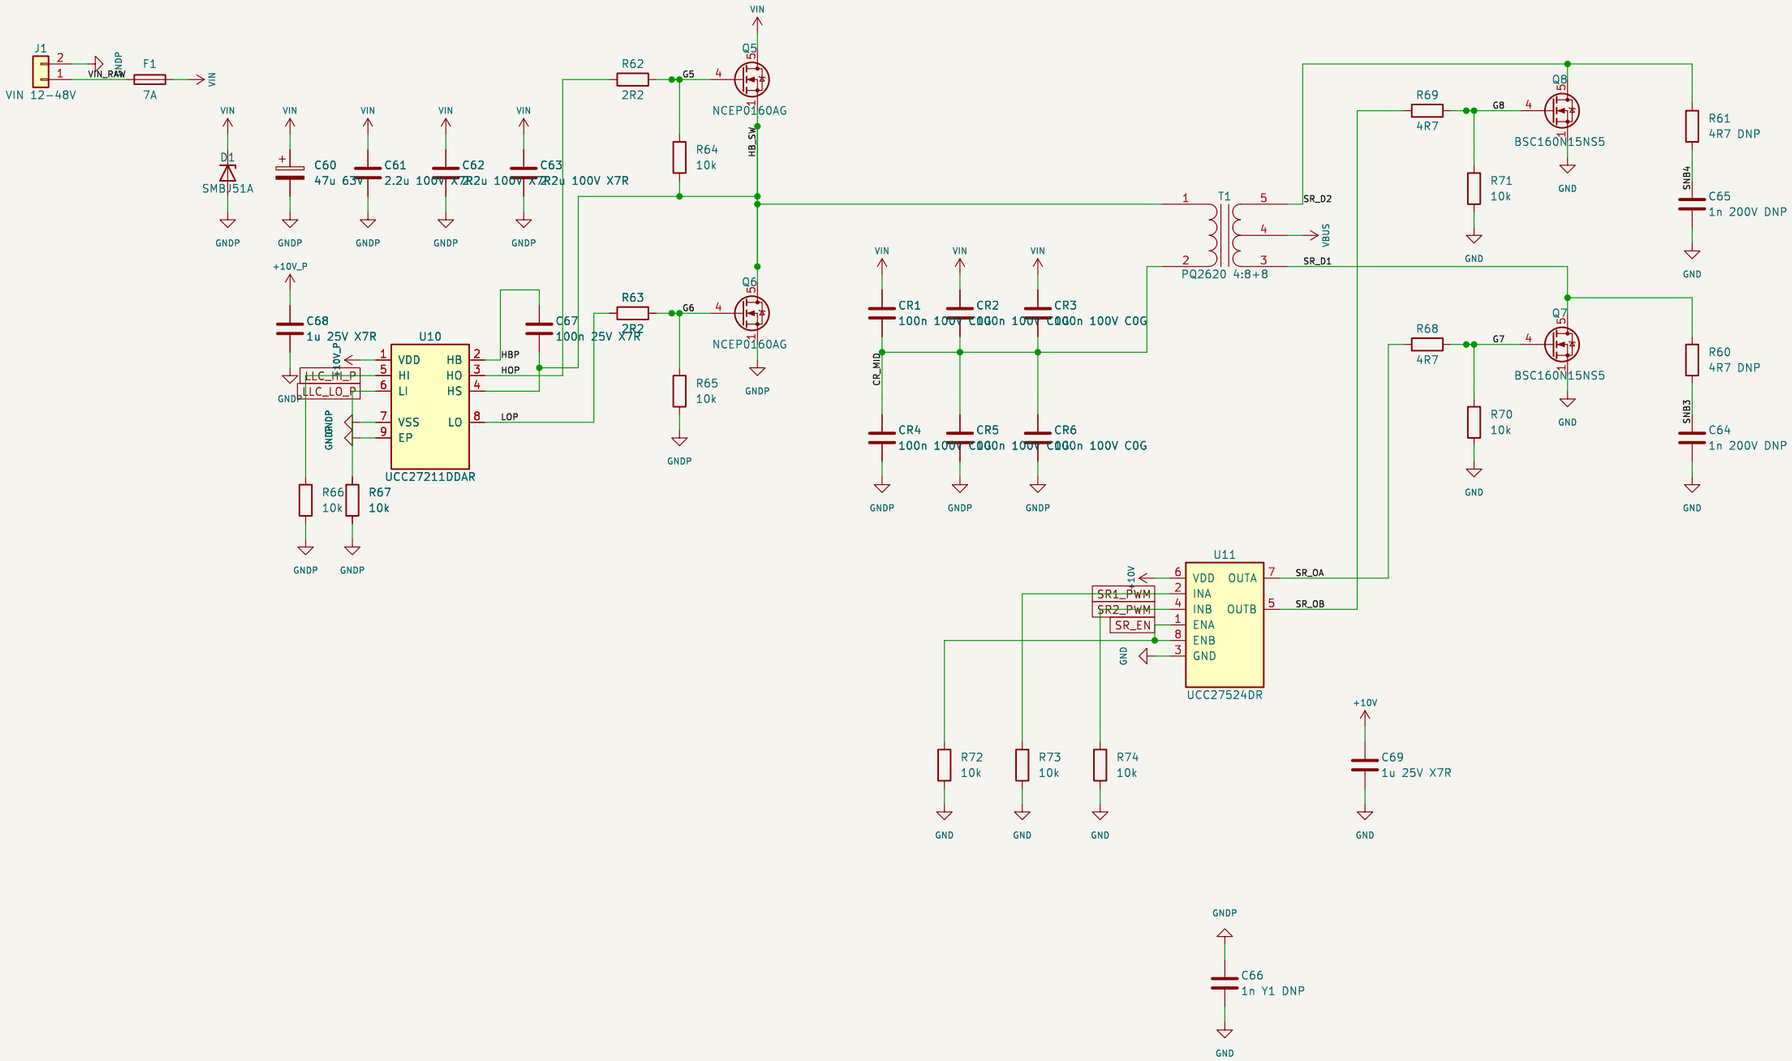


Sheet 2: LLC isolation stage – half-bridge, PQ2620, synchronous rectifier
DCDC LLC + 4SBB, 12–48 V in, 1.5–48 V / 5 A out, STM32G474

Sheet: /LLC isolation stage/
File: llc.kicad_sch

Title: LLC isolation stage – half-bridge, PQ2620, synchronous rectifier

Size: A3	Date: 2026-10-17	**Rev: C**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 2/9

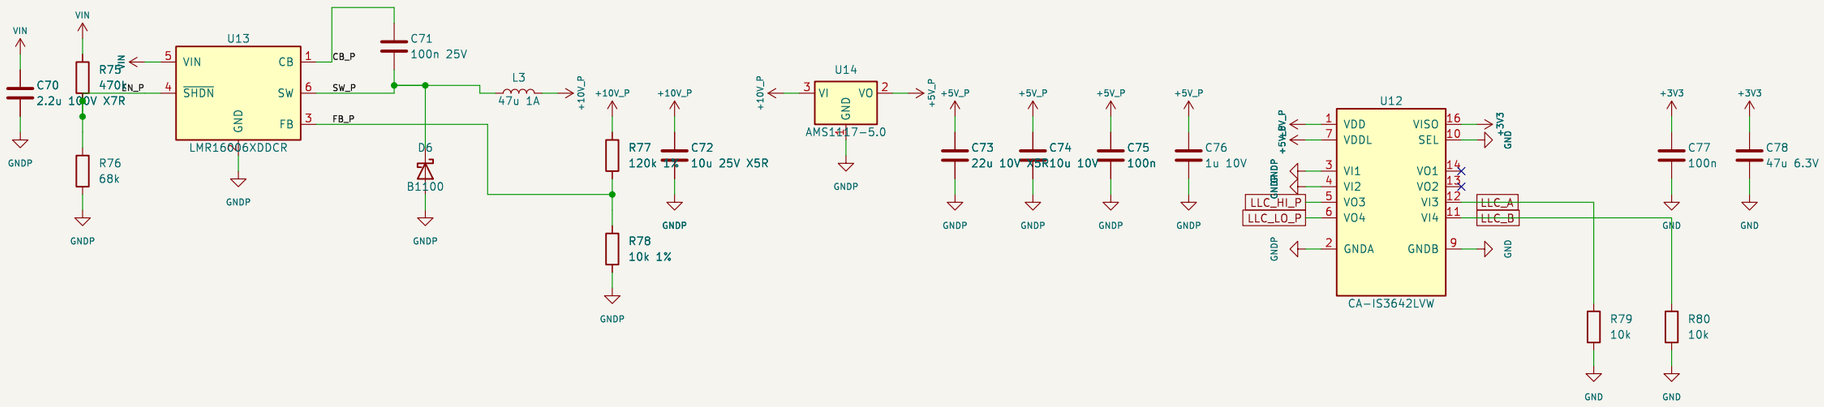


Sheet 3: Primary aux supply and CA-IS3642 isolator
DCDC LLC + 4SBB, 12-48 V in, 1.5-48 V / 5 A out, STM32G474

Sheet: /Primary aux supply and CA-IS3642 isolato/
File: pri_aux.kicad_sch

Title: Primary aux supply and CA-IS3642 isolator

Size: A3	Date: 2026-10-17	**Rev: C**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 3/9

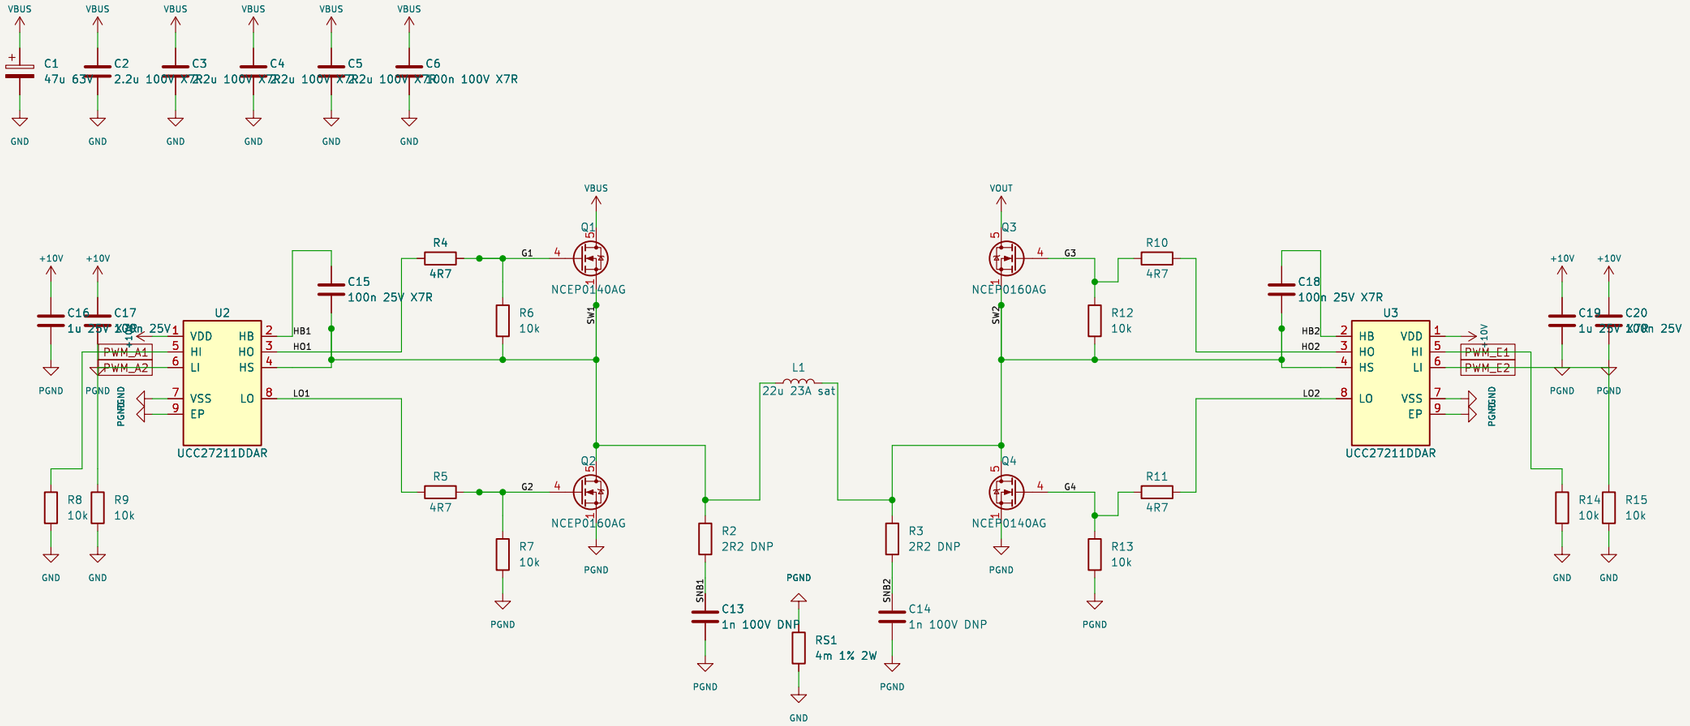


Sheet 4: 4SBB regulator – power stage and gate drivers
DCDC LLC + 4SBB, 12–48 V in, 1.5–48 V / 5 A out, STM32G474

Sheet: /4SBB regulator/
File: sbb.kicad_sch

Title: 4SBB regulator – power stage and gate drivers

Size: A3	Date: 2026-10-17	**Rev: C**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 4/9

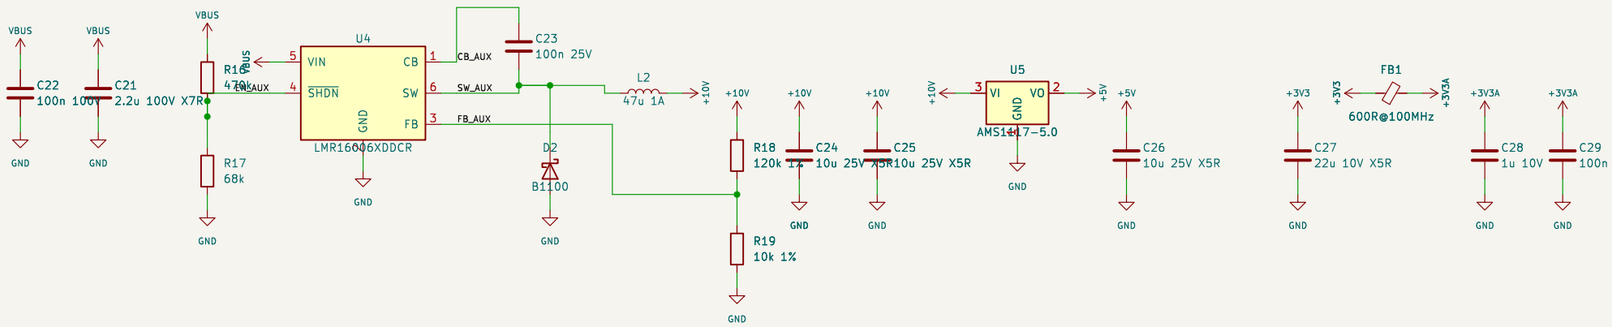


Sheet 5: Secondary aux supplies
DCDC LLC + 4SBB, 12–48 V in, 1.5–48 V / 5 A out, STM32G474

Sheet: /Secondary aux supplies/
File: sec_aux.kicad_sch

Title: Secondary aux supplies

Size: A3	Date: 2026-10-17	**Rev: C**
KiCad E.D.A.	kicad-cli 7.0.11+dfsg-1build4	Id: 5/9

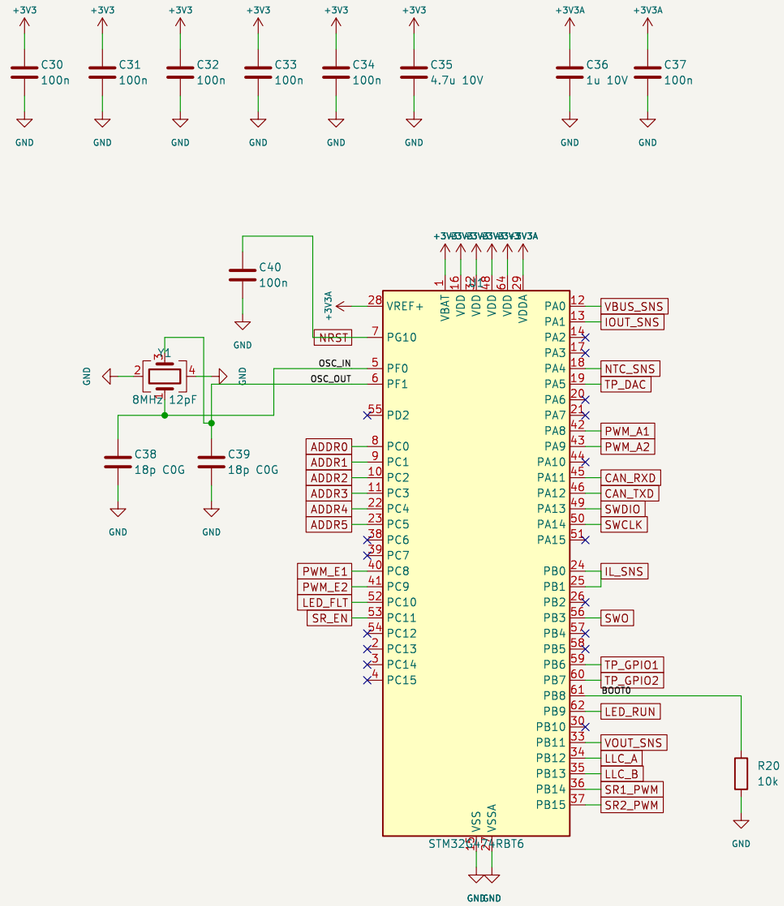



Sheet 6: STM32G474RBT6 MCU
DCDC LLC + 4SBB, 12–48 V in, 1.5–48 V / 5 A out, STM32G474


Sheet: /STM32G474RBT6 MCU/
File: mcu.kicad_sch

Title: STM32G474RBT6 MCU

Size: A3	Date: 2026-10-17	**Rev: C**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 6/9

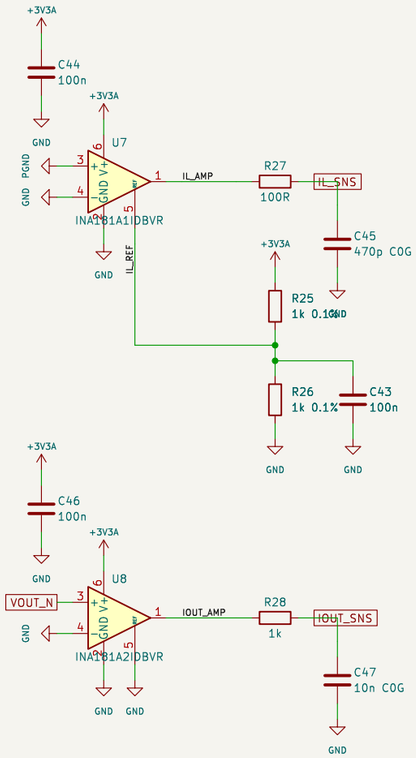

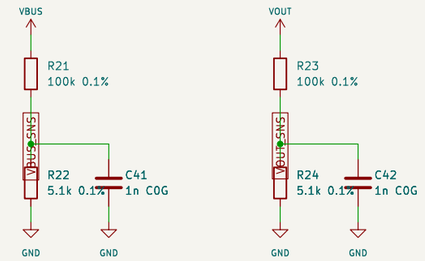




Sheet 7: Sensing – VBUS, VOUT, inductor and output current, NTC
DCDC LLC + 4SBB, 12–48 V in, 1.5–48 V / 5 A out, STM32G474

Sheet: /Sensing/
File: sense.kicad_sch

Title: Sensing – VBUS, VOUT, inductor and output current, NTC

Size: A3	Date: 2026-10-17	**Rev: C**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 7/9

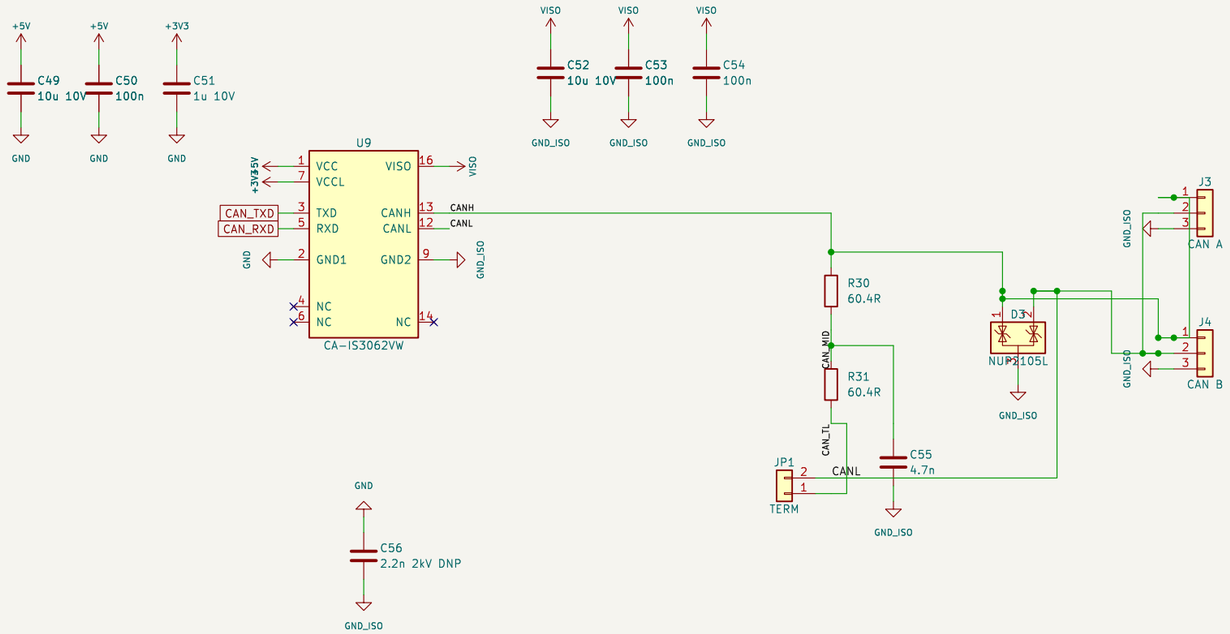



Sheet 8: Isolated CAN
DCDC LLC + 4SBB, 12–48 V in, 1.5–48 V / 5 A out, STM32G474


Sheet: /Isolated CAN/
File: can.kicad_sch


Title: Isolated CAN

Size: A3	Date: 2026-10-17	**Rev: C**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 8/9

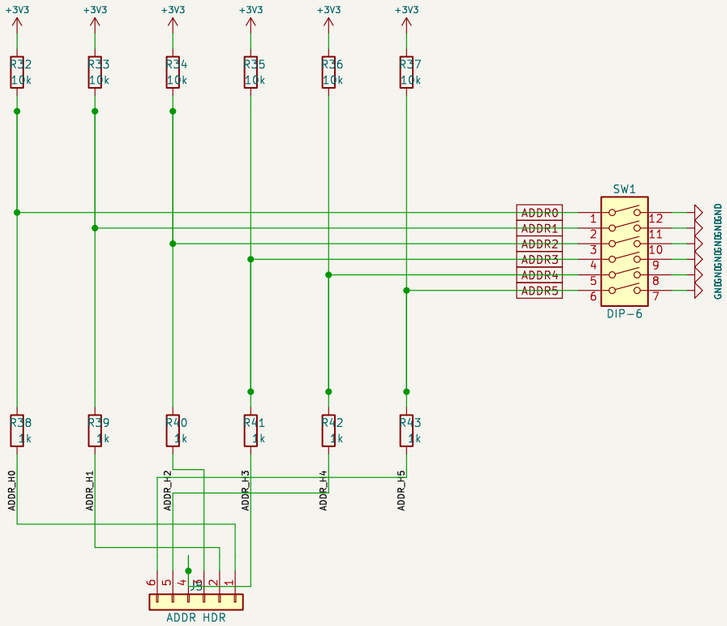



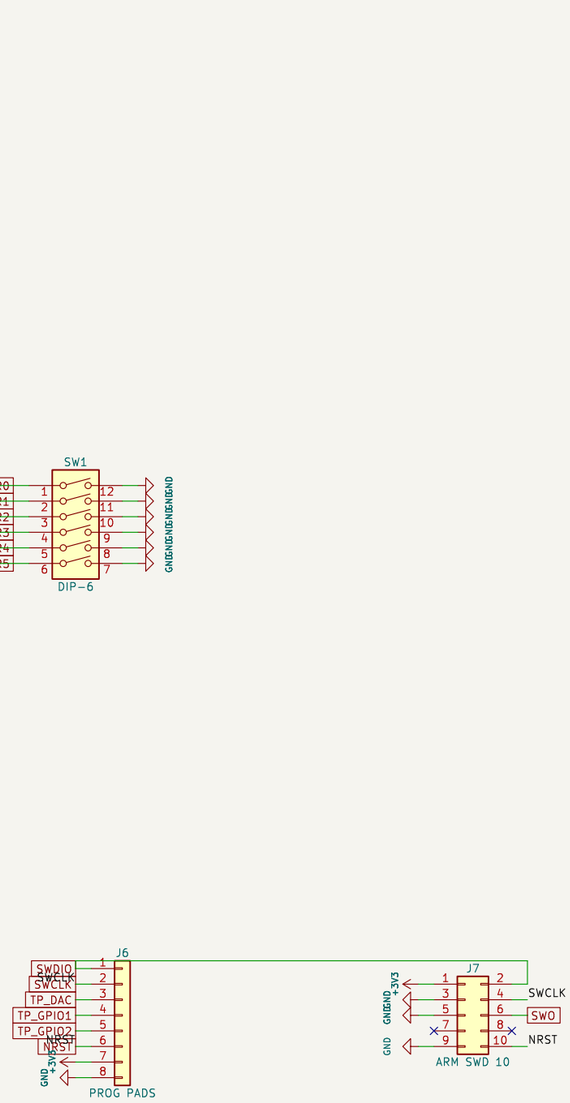



Sheet 9: Address switch, programming pads, ARM SWD, LEDs
DCDC LLC + 4SBB, 12–48 V in, 1.5–48 V / 5 A out, STM32G474

Sheet: /Address switch, programming pads, ARM SW/
File: io.kicad_sch

Title: Address switch, programming pads, ARM SWD, LEDs

Size: A3	Date: 2026-10-17	**Rev: C**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 9/9