LLC isolation stage

File: llc.kicad_sch

Primary aux supply and CA-IS3642 isolato

File: pri_aux.kicad_sch

4SBB regulator

File: sbb.kicad_sch

Secondary aux supplies

File: sec_aux.kicad_sch

STM32G474RBT6 MCU

File: mcu.kicad_sch

Sensing

File: sense.kicad_sch

Isolated CAN

File: can.kicad_sch

Address switch, programming pads, ARM SW


File: io.kicad_sch

Sheets connect through global labels and power symbols
Isolated 12-48 V -> 1.5-48 V / 5 A / 50 W; STM32G474RBT6; isolated CAN

Sheet: /
File: DCDC_LLC_4SBB_G474.kicad_sch

**Title: DCDC LLC + 4SBB G474 - top level**

| | | |
|---|---|---|
| Size: A3 | Date: 2026-10-18 | **Rev: D** |
| KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4 | | Id: 1/9 |

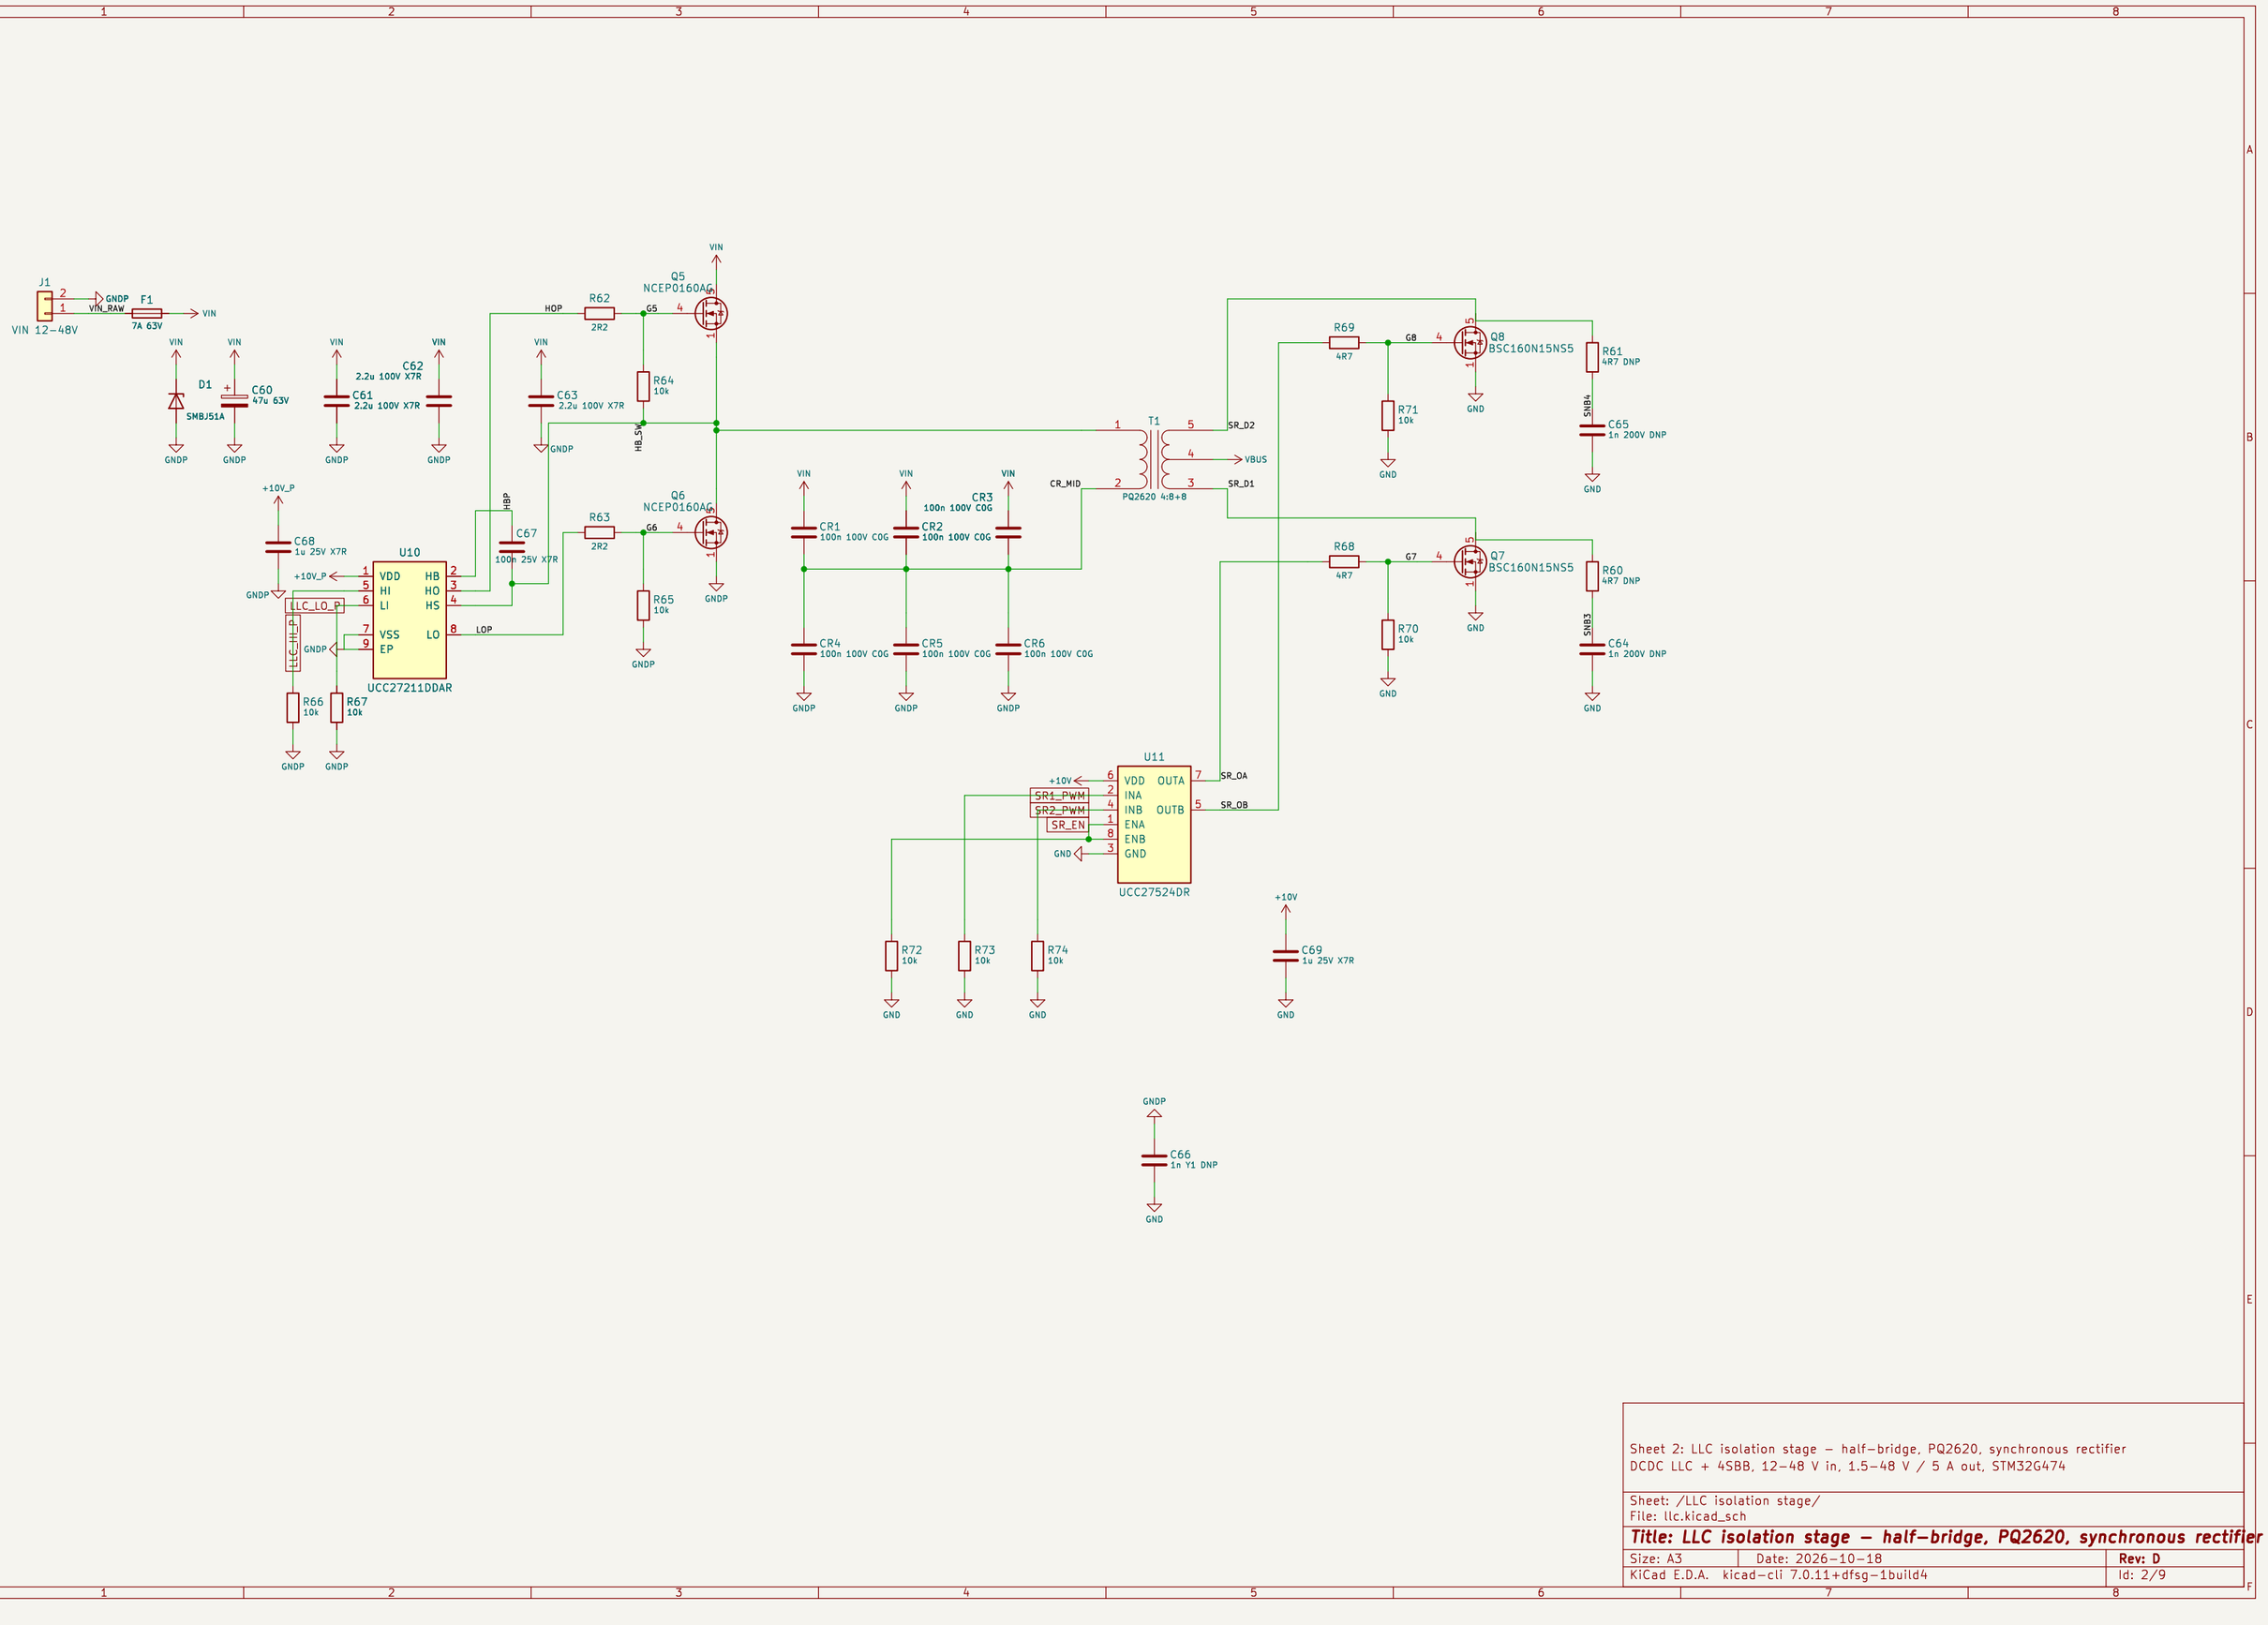




Sheet 2: LLC isolation stage – half–bridge, PQ2620, synchronous rectifier
DCDC LLC + 4SBB, 12–48 V in, 1.5–48 V / 5 A out, STM32G474

Sheet: /LLC isolation stage/
File: llc.kicad_sch

**Title: LLC isolation stage – half–bridge, PQ2620, synchronous rectifier**


| | | |
|---|---|---|
| Size: A3 | Date: 2026–10–18 | **Rev: D** |
| KiCad E.D.A. kicad–cli 7.0.11+dfsg–1build4 | | Id: 2/9 |

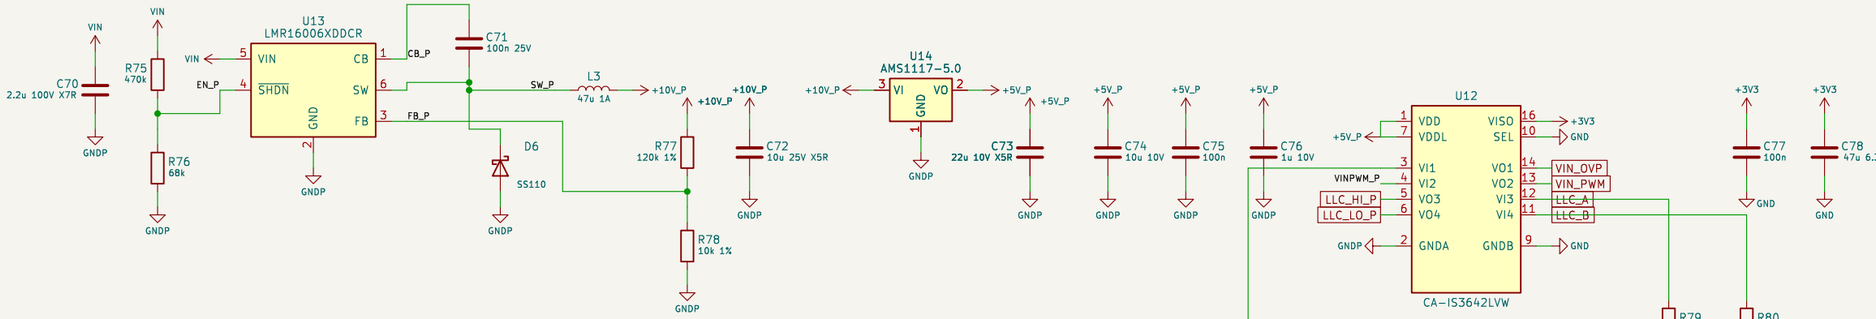

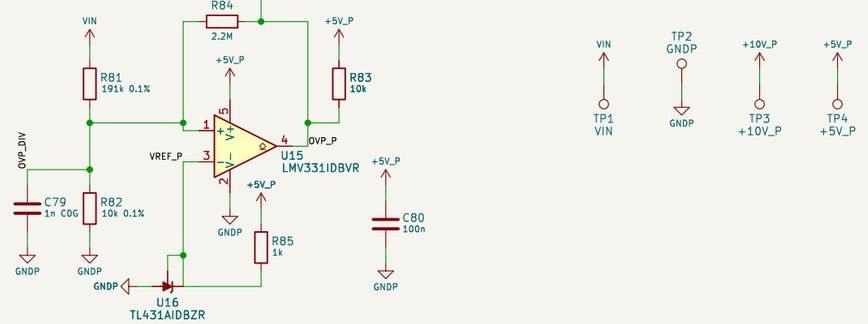
INPUT OVP (primary side)
Trip = 2.495 V x (1 + 191k/10k) = 50.2 V rising
Hysteresis ~0.4 V (R84 2.2M)
OVP_P high = over-voltage -> U12 VI1 -> VO1
-> VIN_OVP -> PA15 (HRTIM1_FLT2 / EXTI15)





VIN MONITOR (primary side, monitoring only)
Ramp 0 -> 2.495 V in ~5 ms (Q9 ~24 uA into C82 47n C0G), reset ~20 us by U17/D7/C81/Q10
U18: VINPWM_P high while RAMP < OVP_DIV (R110 hysteresis on the divider side) -> U12 VI2 -> VO2 -> VIN_PWM -> PA2 (TIM15_CH1 PWM input)
VIN = 50.47 V x (t_high − t_reset) / (period − t_reset) − 0.20 V, t_reset ~20 us; calibrate once

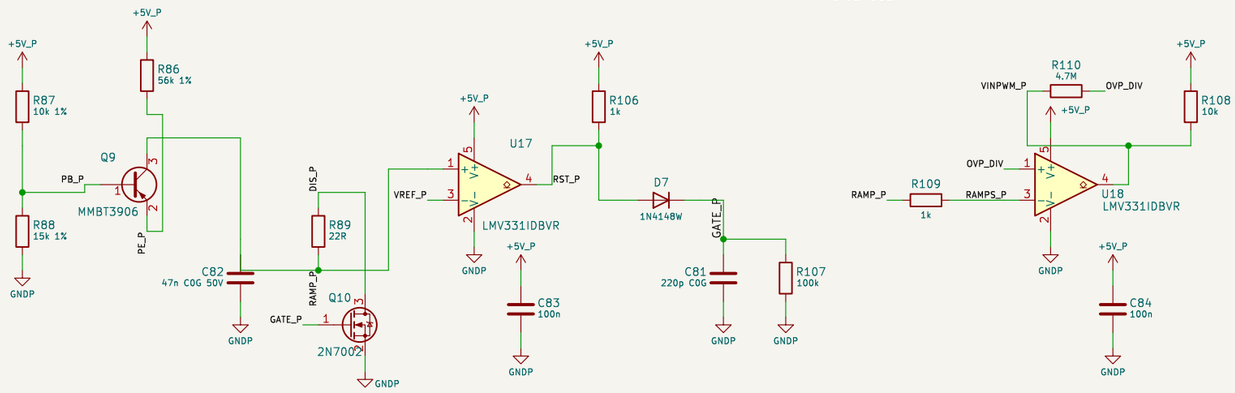Sheet 3: Primary aux supply and CA-IS3642 isolator
DCDC LLC + 4SBB, 12-48 V in, 1.5-48 V / 5 A out, STM32G474

Sheet: /Primary aux supply and CA-IS3642 isolato/
File: pri_aux.kicad_sch

**Title: Primary aux supply and CA-IS3642 isolator**

| Size: A3 | Date: 2026-10-18 | **Rev: D** |
|---|---|---|
| KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4 | | Id: 3/9 |

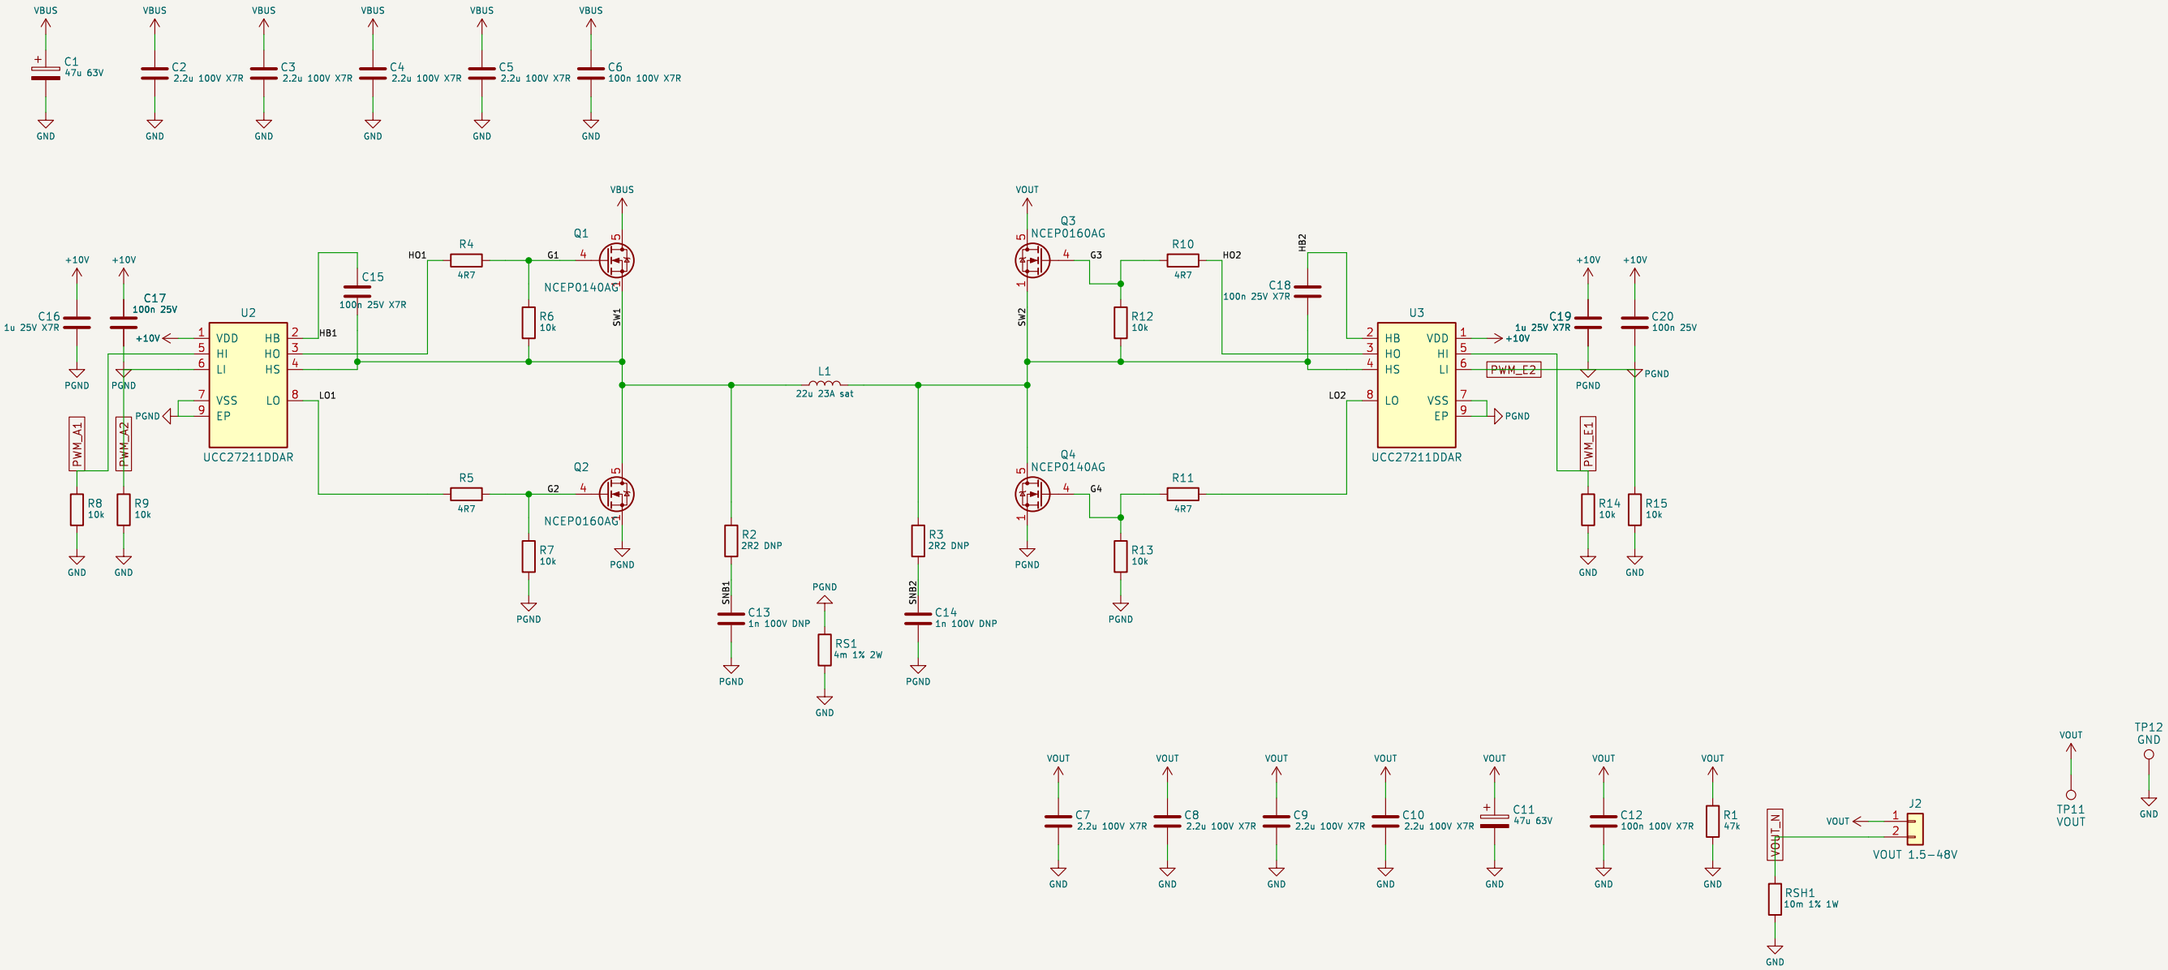




Sheet 4: 4SBB regulator – power stage and gate drivers
DCDC LLC + 4SBB, 12–48 V in, 1.5–48 V / 5 A out, STM32G474

Sheet: /4SBB regulator/
File: sbb.kicad_sch

**Title: 4SBB regulator – power stage and gate drivers**

| Size: A3 | Date: 2026-10-18 | **Rev: D** |
|---|---|---|
| KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4 | | Id: 4/9 |

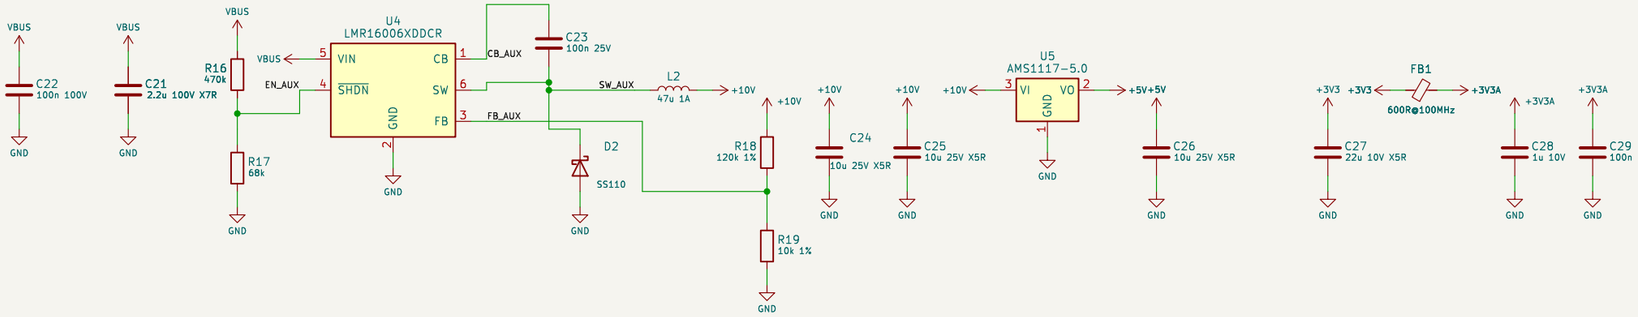






Sheet 5: Secondary aux supplies
DCDC LLC + 4SBB, 12–48 V in, 1.5–48 V / 5 A out, STM32G474

Sheet: /Secondary aux supplies/
File: sec_aux.kicad_sch

**Title: Secondary aux supplies**
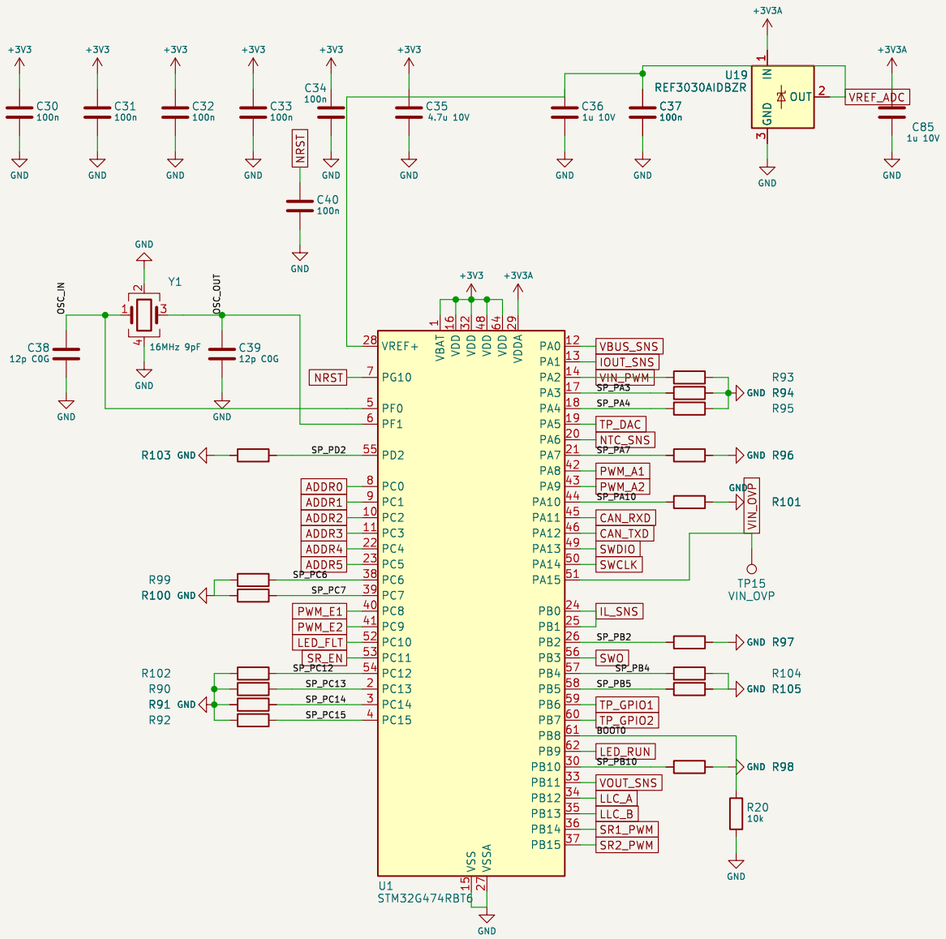
| | | |
|---|---|---|
| Size: A3 | Date: 2026-10-18 | **Rev: D** |
| KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4 | | Id: 5/9 |





Unused GPIOs (PC13–15, PA3–4, PA7, PA10, PB2, PB4, PB5, PB10, PC6, PC7, PC12, PD2):
10k pull-down to GND each (R90–R105). PA4 is kept free for DAC1_OUT1 (Test_pin_DAC).
PA2 = VIN_PWM (TIM15_CH1 PWM input, VIN monitor from the primary); R93 is its pull-down.


Sheet 6: STM32G474RBT6 MCU
DCDC LLC + 4SBB, 12–48 V in, 1.5–48 V / 5 A out, STM32G474

Sheet: /STM32G474RBT6 MCU/
File: mcu.kicad_sch

**Title: STM32G474RBT6 MCU**

| Size: A3 | Date: 2026-10-18 | **Rev: D** |
|---|---|---|
| KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4 | | Id: 6/9 |

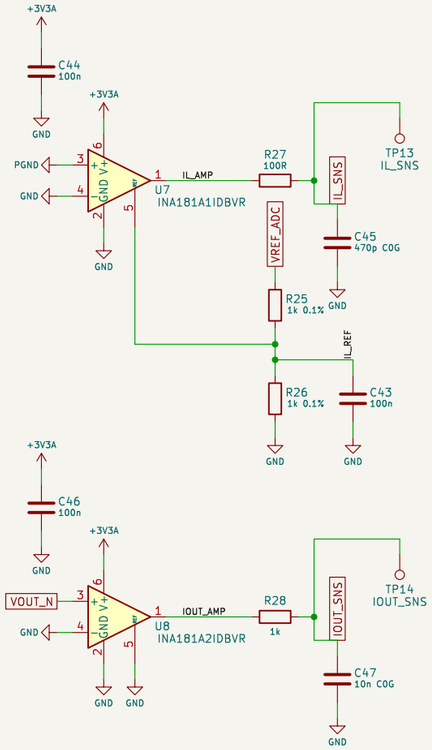

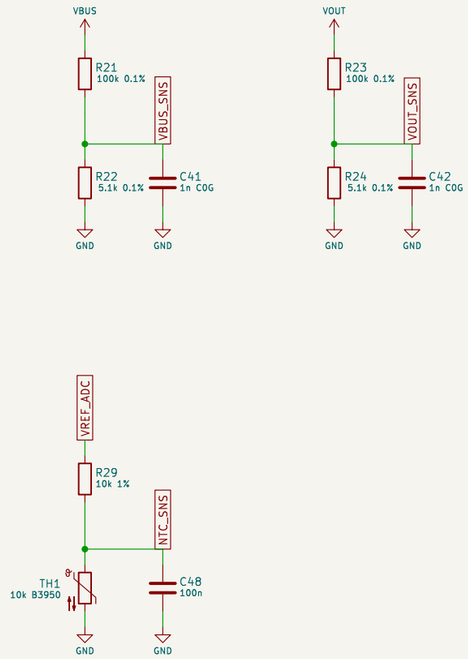




Sheet 7: Sensing – VBUS, VOUT, inductor and output current, NTC
DCDC LLC + 4SBB, 12–48 V in, 1.5–48 V / 5 A out, STM32G474

Sheet: /Sensing/
File: sense.kicad_sch

**Title: Sensing – VBUS, VOUT, inductor and output current, NTC**
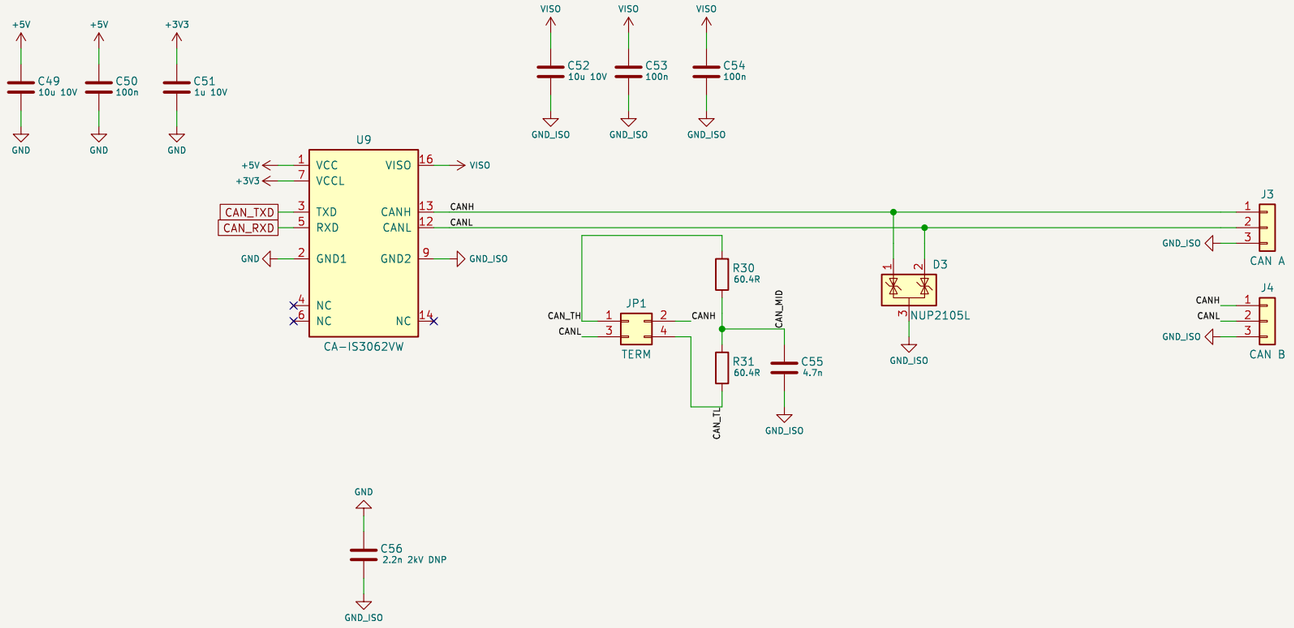
| Size: A3 | Date: 2026-10-18 | **Rev: D** |
|---|---|---|
| KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4 | | Id: 7/9 |






Sheet 8: Isolated CAN
DCDC LLC + 4SBB, 12–48 V in, 1.5–48 V / 5 A out, STM32G474


Sheet: /Isolated CAN/
File: can.kicad_sch


**Title: Isolated CAN**

| | | |
|---|---|---|
| Size: A3 | Date: 2026-10-18 | **Rev: D** |
| KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4 | | Id: 8/9 |

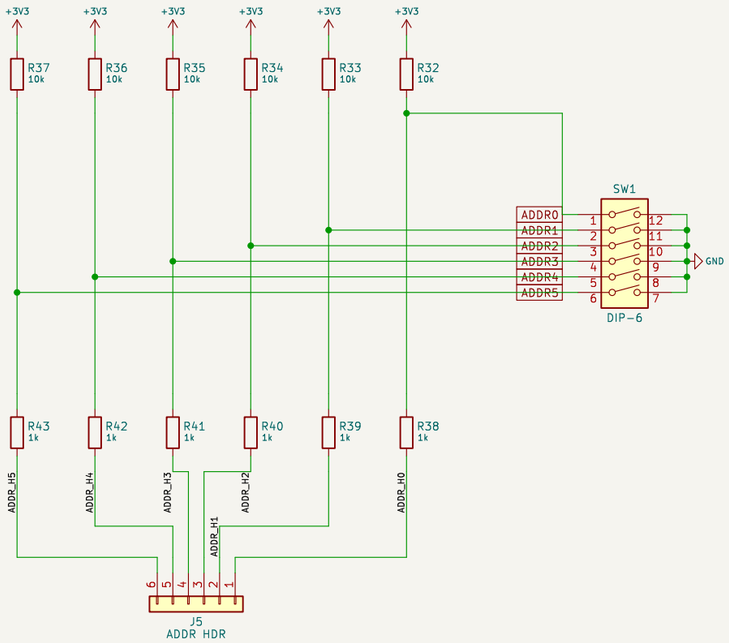


Sheet 9: Address switch, programming pads, ARM SWD, LEDs
DCDC LLC + 4SBB, 12–48 V in, 1.5–48 V / 5 A out, STM32G474

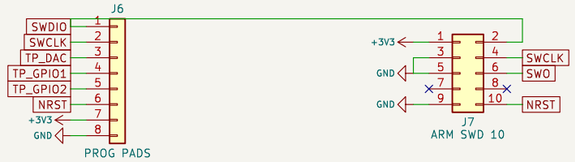Sheet: /Address switch, programming pads, ARM SW/
File: io.kicad_sch

**Title: Address switch, programming pads, ARM SWD, LEDs**

| Size: A3 | Date: 2026-10-18 | **Rev: D** |
|---|---|---|
| KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4 | | Id: 9/9 |