


Technical Datasheet of WIN-PIHAT-QCTL EC200-4G-eSIM-v1.0

Overview :-

The **PiHAT A7672S** is a cost-effective LTE expansion board tailored for Raspberry Pi, offering **optimized 4G telemetry** and built-in **GNSS capabilities** alongside cellular triangulation (LBS). The hardware maximizes network redundancy by featuring both **Physical & eSIM support**, while an onboard **Real-Time Clock (RTC)** ensures accurate localized timestamping for secure data logging.

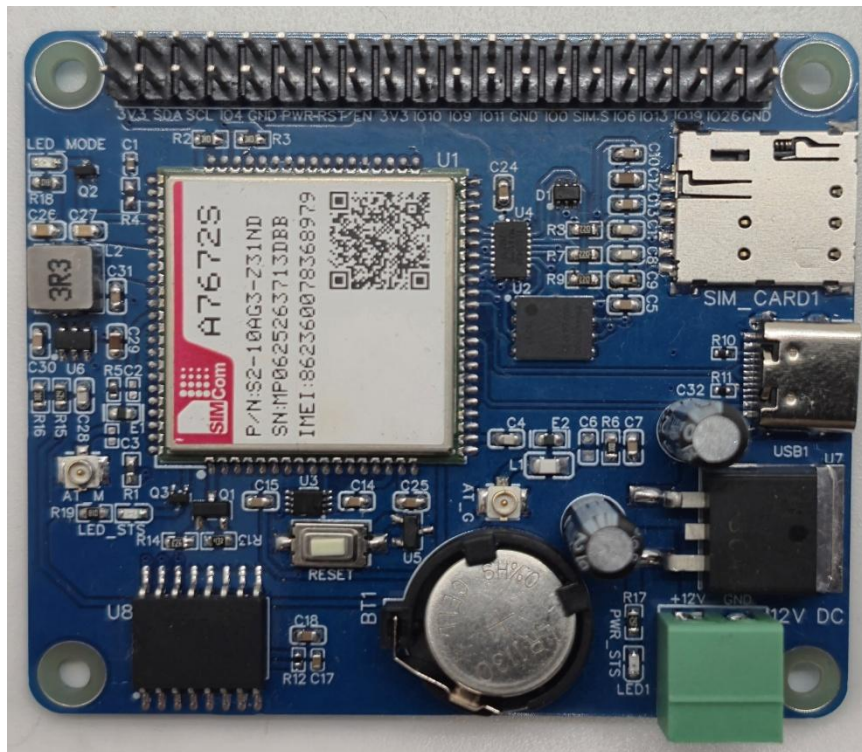

PiHAT features a **highly adaptable communication interface** that supports reliable data transmission through both standard **UART and USB Type-C**. Its **streamlined telemetry design** allows for scalable connectivity, delivering a **compact and reliable solution** for stationary IoT endpoints, smart metering, and industrial monitoring.

Specifications

General :-

Dimensions	56 mm L x 65 mm W
Power	Input Power – 12/24V DC
Operating Temperature	0 – 60° C (32 ~ 140°F)
Storage Temperature	-20 - 70° C (-4 ~ 158°F)
Storage Humidity	5 ~ 95 % RH, non – Condensing

Certifications



PiHAT EC200 (Cellular & Tracking) :-

Module Core	SIMCom A7672S (LTE Cat 1)
Network Support	4G LTE Data & SMS
SIM Interfaces	Dual Support (Physical SIM & eSIM)
Location Services	Cellular Triangulation (LBS / Raw Cell ID)
Communication	USB Type-C & Standard UART
Timekeeping	Onboard RTC with Battery Backup

Configuration :-

The cellular modem operates as a USB/UART-driven communication module and is interfaced to the Raspberry Pi GPIO header through dedicated power and reset control traces. Modem control and telemetry are performed via software running on the Raspberry Pi. Specific GPIO pins are configured as digital outputs to drive the onboard power-management IC and SIM routing logic.

When the Power pin (PWR) is pulsed HIGH, the onboard circuitry boots the baseband processor, bringing the module ONLINE to establish a network connection. When the Reset pin (RST) is pulled to an active LOW state, the baseband performs a hard hardware reboot to clear any unresponsive states. Additionally, driving the SIM Select pin toggles the active data lines between the physical Nano-SIM slot and the onboard eSIM.

The following are step by step guides for configuration:

1. Connect the Module to +12/24V DC POWER SUPPLY.
2. Connect the Board to the Raspberry Pi via header pins and the USB Type-C data cable.

Sr. No.	Control Function	Pi GPIO	Header Pin number
1	Power Key (PWR)	17	11
2	Hardware Reset (RST)	27	13
3	Module Enable (EN)	22	15
4	SIM Select (A7672S Board)	05	29

Sr. No.	Communication A7672S	Pi GPIO	Header Pin number
1	SDA	02	03
2	SCL	03	05
3	RXD	14	08
4	TXD	15	10

Module Power & Signal Characteristics :-


- **Power Starvation:** The cellular radio amplifier can draw massive peak currents (up to 2.0A) during network registration and data transmission.
- **Example:** Relying solely on the Raspberry Pi's USB or GPIO header for power will cause voltage brownouts, resulting in unexpected module reboots or "Zombie" ports. Always connect a dedicated external power supply to the board's terminal block.
- **GNSS Limitations:** The GNSS engine requires a dedicated antenna and a direct line of sight to the sky to download satellite almanac data and calculate a 3D fix.
- **Example:** Operating the PiHAT deep indoors or inside a metal enclosure will result in indefinite "Searching" states. Ensure the GNSS antenna is routed outside or utilize LBS (Cell Tower Triangulation) as a software fallback.
- **Boot Logic:** The PWR (Power) GPIO pin operates as a momentary hardware toggle switch, not an absolute ON/OFF switch.
- **Example:** Pulsing the PWR pin while the module is already ON will initiate a shutdown sequence. To avoid accidental power-downs during error recovery, rely on the RST (Reset) pin for forced reboots.

Sample Code & Examples :-

Download the official Python example scripts—including the fully integrated GNSS and MQTT telemetry loops—from our repository here:

1. [a7672s_uart_basic.py](#)
2. [a7672s_typec_master.py](#)
3. [a7672s_typec_gnss.py](#)
4. [a7672s_rtc_setup.py](#)

Hardware Interface & Connector Layout:

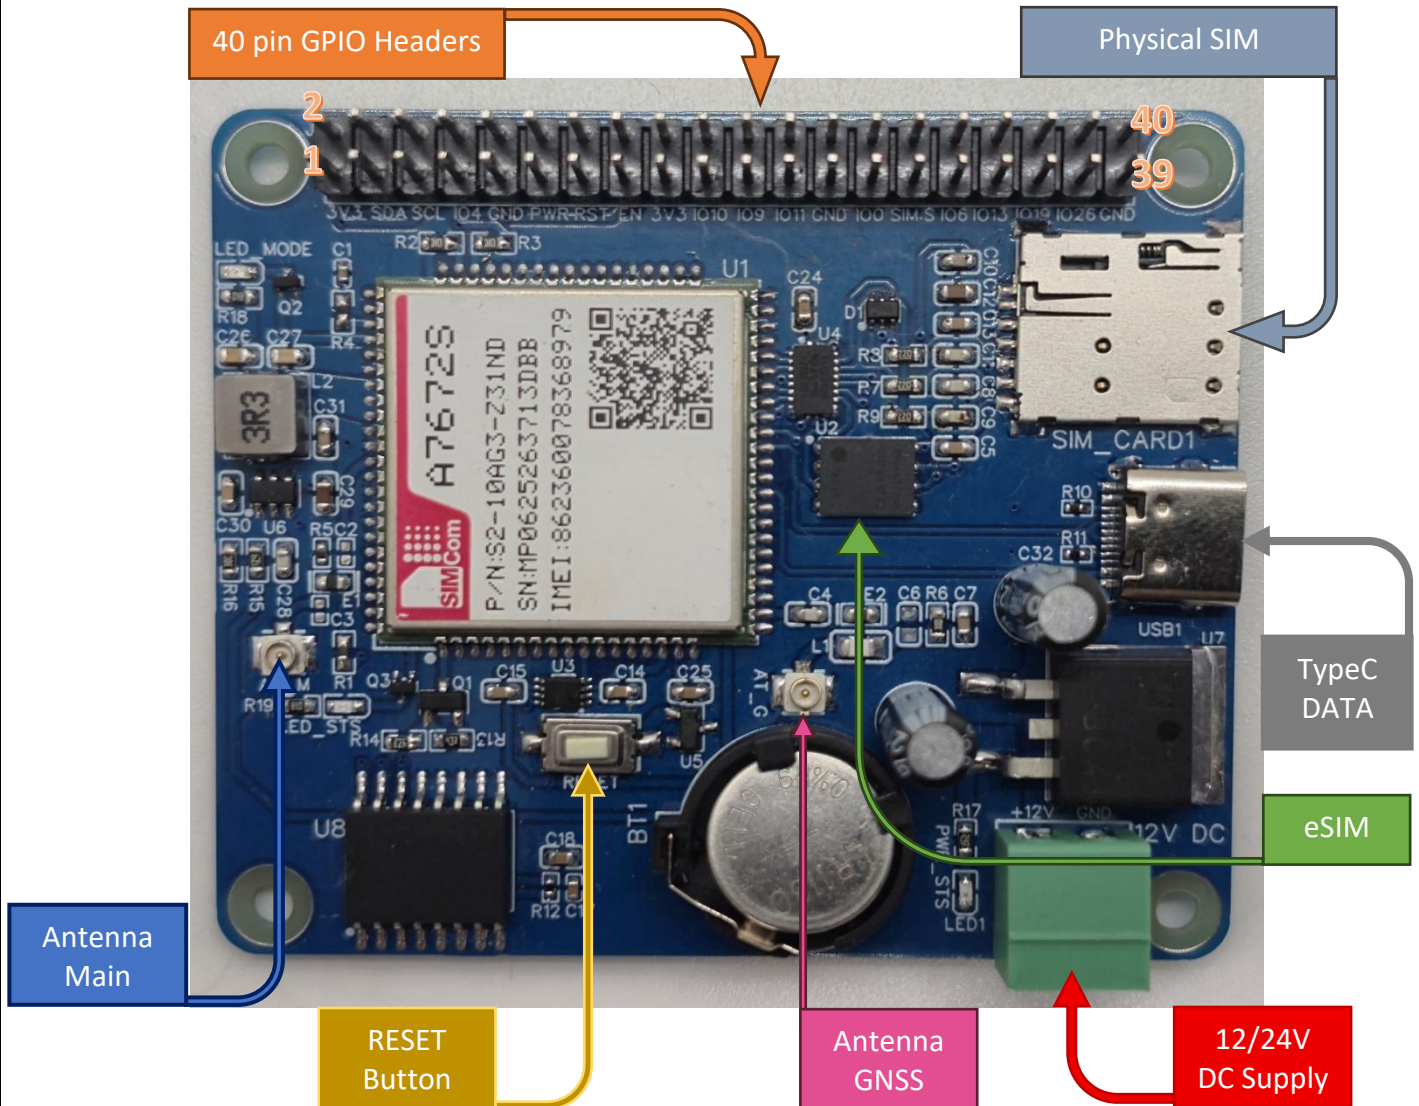

Contact us: -

Augmatic Technologies Pvt. Ltd.,
Plot no 6, Shah Industrial Estate II,
Kotambi,
Vadodara – 391510.
Email – Sales@wittelb.com