

Totally Integrated Automation Portal

Program blocks

Main [OB1]

Main Properties

General


Name	Main	Number	1	Type	OB
Language	LAD	Numbering	Automatic		

Information

Title	"Main Program Sweep (Cycle)"	Author	SHREYASH_GHADGE	Comment	I-1 – start (Push button) I-2 – Stop Q-1– Red Light Q-2– Green Light Q-3-Yellow Light When Start button is pressed, RED light should become ON and should remain ON for 5 Seconds. After 5 Seconds, RED light should become OFF and GREEN light should become ON and should remain ON for next 7 Seconds. After 7 Seconds, Green Light should become OFF and YELLOW light should become ON and should remain ON for 2 Seconds. After 2 Seconds, YELLOW light should become OFF and again RED light should become ON and the Cycle should repeat, till I-2 i.e. STOP button is pressed
Family		Version	0.1	User-defined ID	


Name	Data type	Default value	Comment
▼ Input			
Initial_Call	Bool		Initial call of this OB
Remanence	Bool		=True, if remanent data are available
Temp			
Constant			

Network 1:

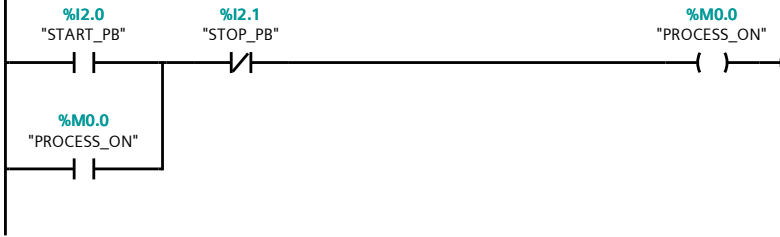


Network 2: RED_LIGHT

When Start button is pressed, RED light should become ON and should remain ON for 5 Seconds.
After 5 Seconds, RED light should become OFF

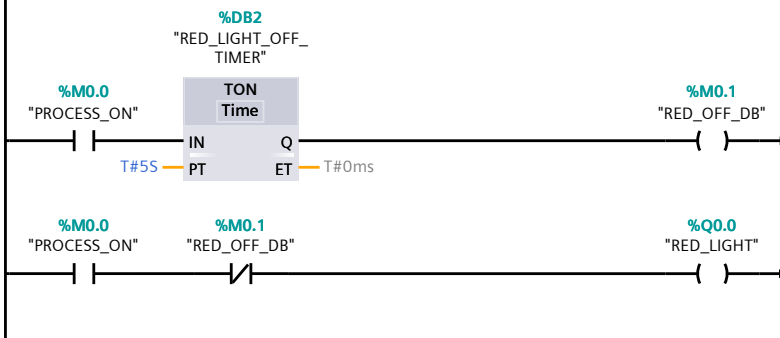


Network 3: GREEN_LIGHT

After 5 Seconds, RED light should become OFF and GREEN light should become ON and should remain ON for next 7 Seconds

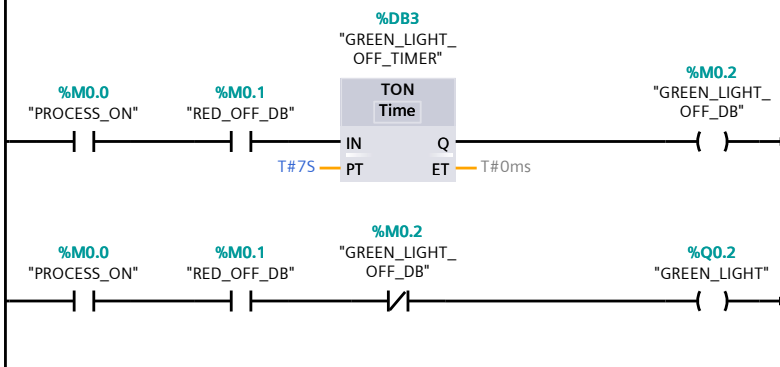


Network 4: YELLO_LIGHT

After 7 Seconds, Green Light should become OFF and YELLOW light should become ON and should remain ON for 2 Seconds.

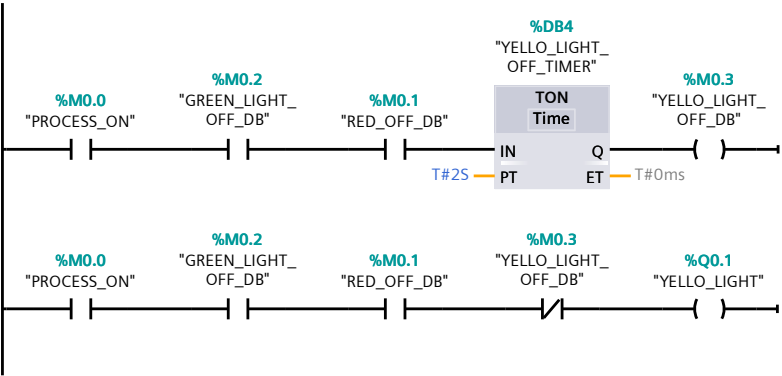

Network 5: CYCLE_REPEAT

After 2 Seconds, YELLOW light should become OFF and again RED light should become ON and the Cycle should repeat

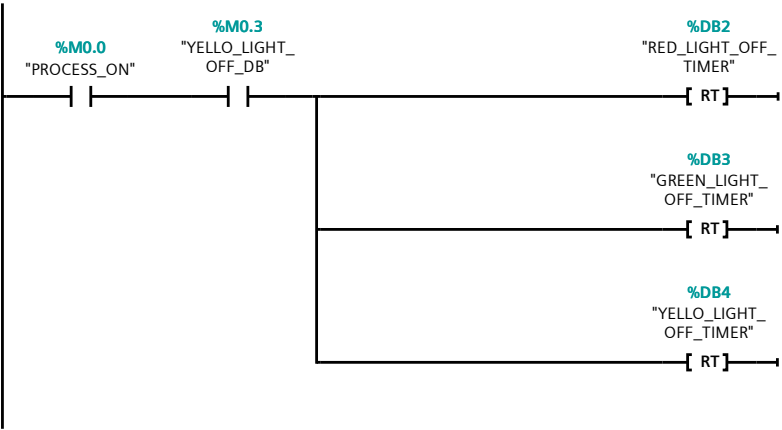

Program blocks / System blocks / Program resources

RED_LIGHT_OFF_TIMER [DB2]

RED_LIGHT_OFF_TIMER Properties

General

Name	RED_LIGHT_OFF_TIMER	Number	2	Type	DB
Language	DB	Numbering	Automatic		

Information

Title		Author	Simatic	Comment	
Family	IEC	Version	1.0	User-defined ID	IEC_TMR

Name	Data type	Start value	Retain	Accessible from HMI/O PC UA/Web API	Writable from HM I/O PC UA/Web API	Visible in HMI engineering	Set-point	Supervision	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

Program blocks / System blocks / Program resources

RED_LIGHT_OFF_TIMER [DB2]

RED_LIGHT_OFF_TIMER Properties

General

Name	RED_LIGHT_OFF_TIMER	Number	2	Type	DB
Language	DB	Numbering	Automatic		

Information

Title		Author	Simatic	Comment	
Family	IEC	Version	1.0	User-defined ID	IEC_TMR

Name	Data type	Start value	Retain	Access- ible from HMI/O PC UA/Web API	Wri- ta- ble fro m HM I/O PC UA/ Web API	Visible in HMI engi- neer- ing	Set- point	Super- vision	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

RED_LIGHT_OFF_TIMER Properties					
General					
Name	RED_LIGHT_OFF_TIMER	Number	2	Type	DB
Language	DB	Numbering	Automatic		
Information					
Title		Author	Simatic	Comment	
Family	IEC	Version	1.0	User-defined ID	IEC_TMR

RED_LIGHT_OFF_TIMER Properties					
General					
Name	RED_LIGHT_OFF_TIMER	Number	2	Type	DB
Language	DB	Numbering	Automatic		
Information					
Title		Author	Simatic	Comment	
Family	IEC	Version	1.0	User-defined ID	IEC_TMR

RED_LIGHT_OFF_TIMER Properties					
General					
Name	RED_LIGHT_OFF_TIMER	Number	2	Type	DB
Language	DB	Numbering	Automatic		
Information					
Title		Author	Simatic	Comment	
Family	IEC	Version	1.0	User-defined ID	IEC_TMR

RED_LIGHT_OFF_TIMER Properties					
General					
Name	RED_LIGHT_OFF_TIMER	Number	2	Type	DB
Language	DB	Numbering	Automatic		
Information					
Title		Author	Simatic	Comment	
Family	IEC	Version	1.0	User-defined ID	IEC_TMR

RED_LIGHT_OFF_TIMER Properties					
General					
Name	RED_LIGHT_OFF_TIMER	Number	2	Type	DB
Language	DB	Numbering	Automatic		
Information					
Title		Author	Simatic	Comment	
Family	IEC	Version	1.0	User-defined ID	IEC_TMR

Name	Data type	Start value	Retain	Access- ible from HMI/O PC UA/Web API	Wri- ta- ble fro m HM I/O PC UA/ We b API	Visible in HMI engi- neer- ing	Set- point	Super- vision	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

Program blocks / System blocks / Program resources

GREEN_LIGHT_OFF_TIMER [DB3]

GREEN_LIGHT_OFF_TIMER Properties

General

Name	GREEN_LIGHT_OFF_TIMER	Number	3	Type	DB
------	-----------------------	--------	---	------	----

Language	DB	Numbering	Automatic
----------	----	-----------	-----------

Information

Title		Author	Simatic	Comment	
Family	IEC	Version	1.0	User-defined ID	IEC_TMR

Name	Data type	Start value	Retain	Access- ible from HMI/O PC UA/Web API	Wri- ta- ble from HMI I/O PC UA/ Web API	Visible in HMI engi- neer- ing	Set- point	Super- vision	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

Program blocks / System blocks / Program resources

YELLO_LIGHT_OFF_TIMER [DB4]

YELLO_LIGHT_OFF_TIMER Properties

General					
Name	YELLO_LIGHT_OFF_TIMER	Number	4	Type	DB
Language	DB	Numbering	Automatic		
Information					
Title		Author	Simatic	Comment	
Family	IEC	Version	1.0	User-defined ID	IEC_TMR

Name	Data type	Start value	Retain	Access- ible from HMI/O PC UA/Web API	Wri- ta- ble from HMI I/O PC UA/ Web API	Visible in HMI engi- neer- ing	Set- point	Super- vision	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		