

CONTROL_MOTOR_WITH_TIMER / PLC_1 [CPU 1215C DC/DC/DC] / Program blocks

Main [OB1]

Main Properties

General

Name	Main	Number	1	Type	OB
Language	LAD	Numbering	Automatic		

Information


Title	CONTROL_OF_MOTOR_WITH_TIMER	Author	SHREYASH_GHADGE	Comment	When Start Switch (I1) is ON, Motor 1 (Q1) should be ON for 5 Sec. - After 5 Sec, Motor 1 should stop And Motor 2 (Q2) should start and remain ON for 5 Sec. - After 5 Sec, Motor 2 should stop And Motor 3 (Q3) should start and remain ON for 5 Sec. After 5 Sec, Motor 3 should stop And Motor 4 (Q4) should start and remain ON for 5 Sec. - After 5 Sec, Motor 4 should stop and again Motor 1 (Q1) should start and the process should be repeated till STOP Switch (I2) is pressed. When I2 is presses, the complete process should stop.
Family		Version	0.1	User-defined ID	

Main

Name	Data type	Default value	Comment
▼ Input			
Initial_Call	Bool		Initial call of this OB
Remanence	Bool		=True, if remanent data are available
Temp			
Constant			


Network 1: MOTOR_1

When Start Switch (I1) is ON, Motor 1 (Q1) should be ON for 5 Sec

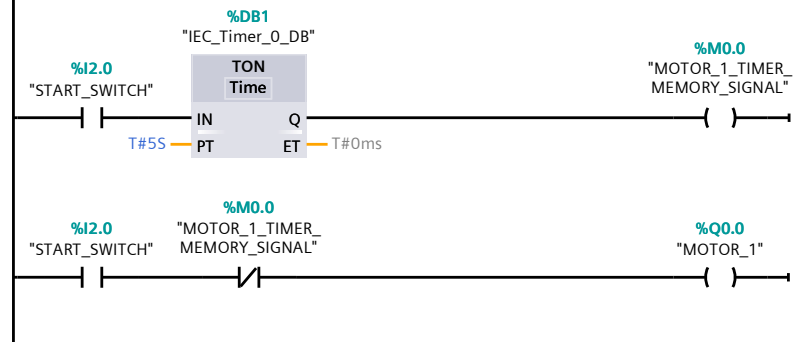


Network 2: MOTOR_2

After 5 Sec, Motor 1 should stop And Motor 2
(Q2) should start and remain ON for 5 Sec

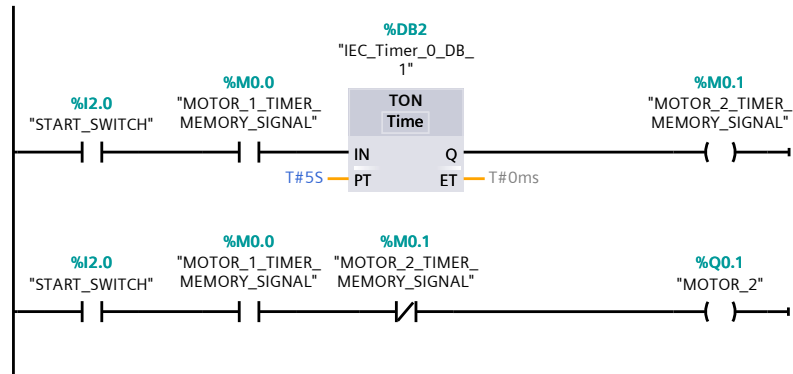


Network 3: MOTOR_3

After 5 Sec, Motor 2 should stop And Motor 3
(Q3) should start and remain ON for 5 Sec.

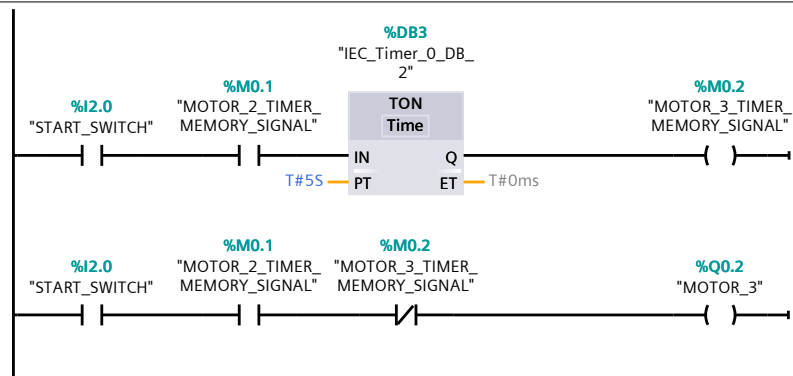

Network 4: MOTOR_4

After 5 Sec, Motor 3 should stop And Motor 4
(Q4) should start and remain ON for 5 Sec.

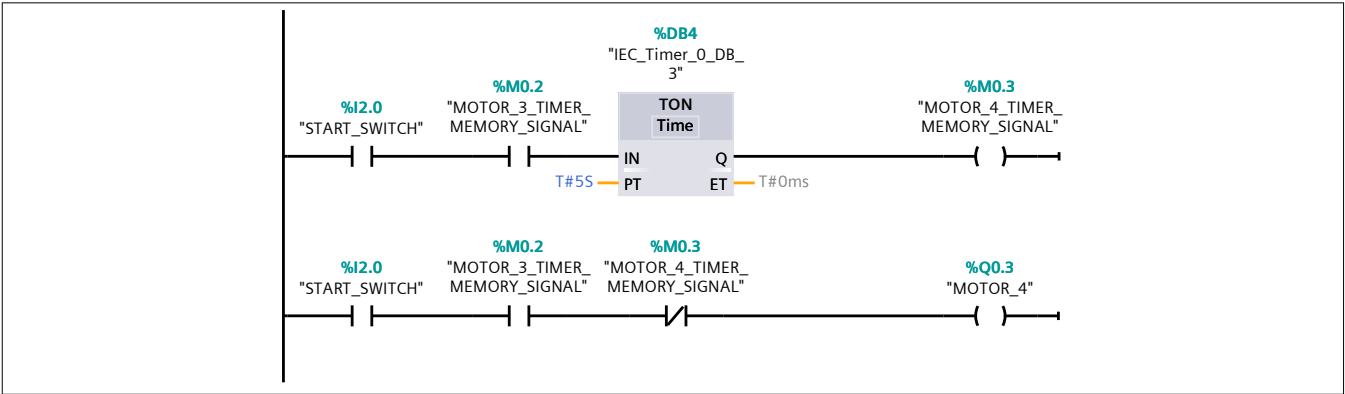

Network 5:

