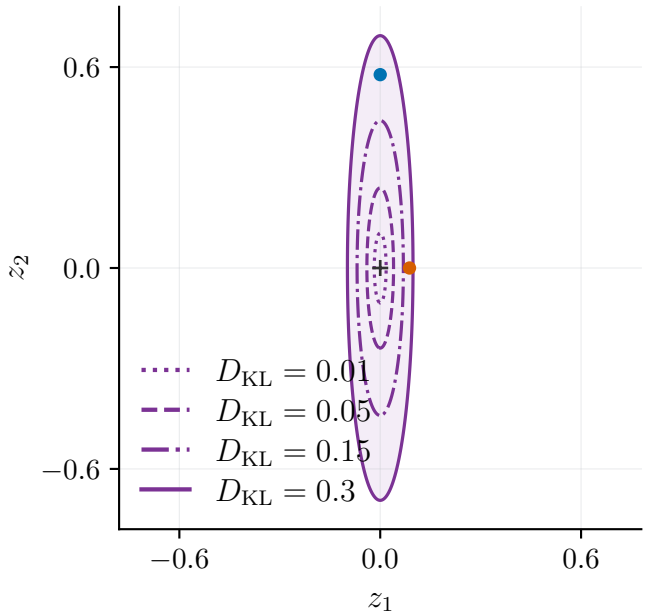
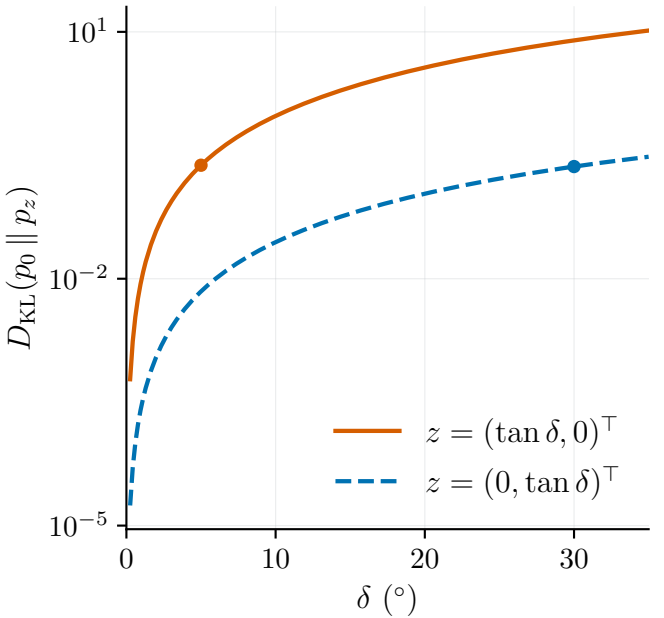
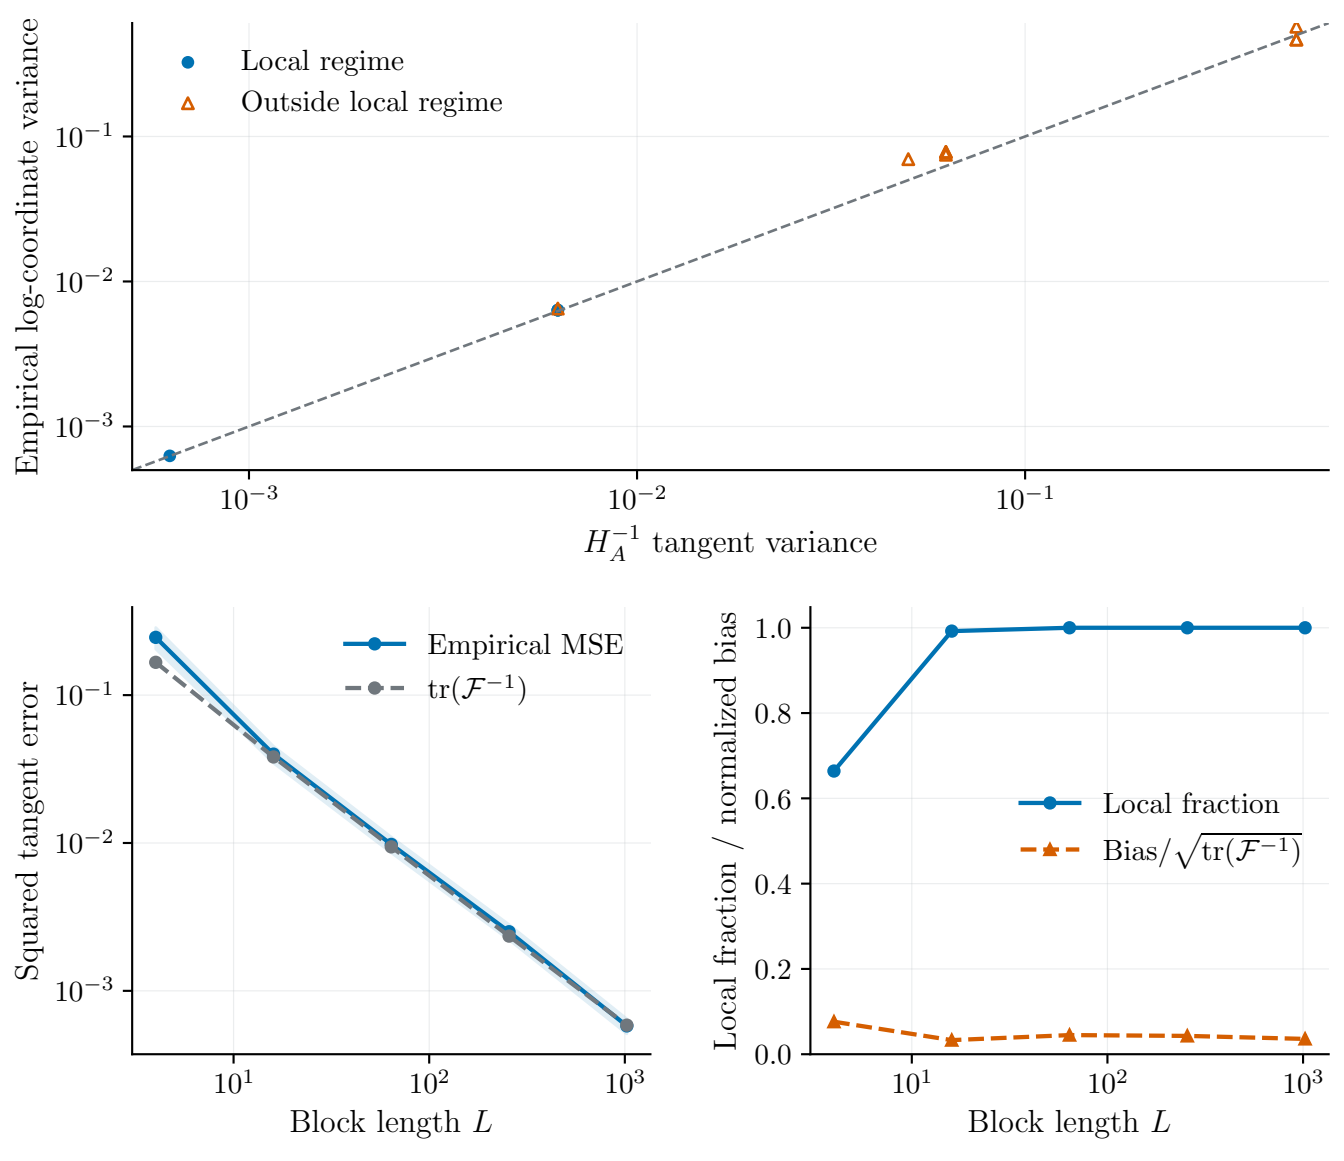
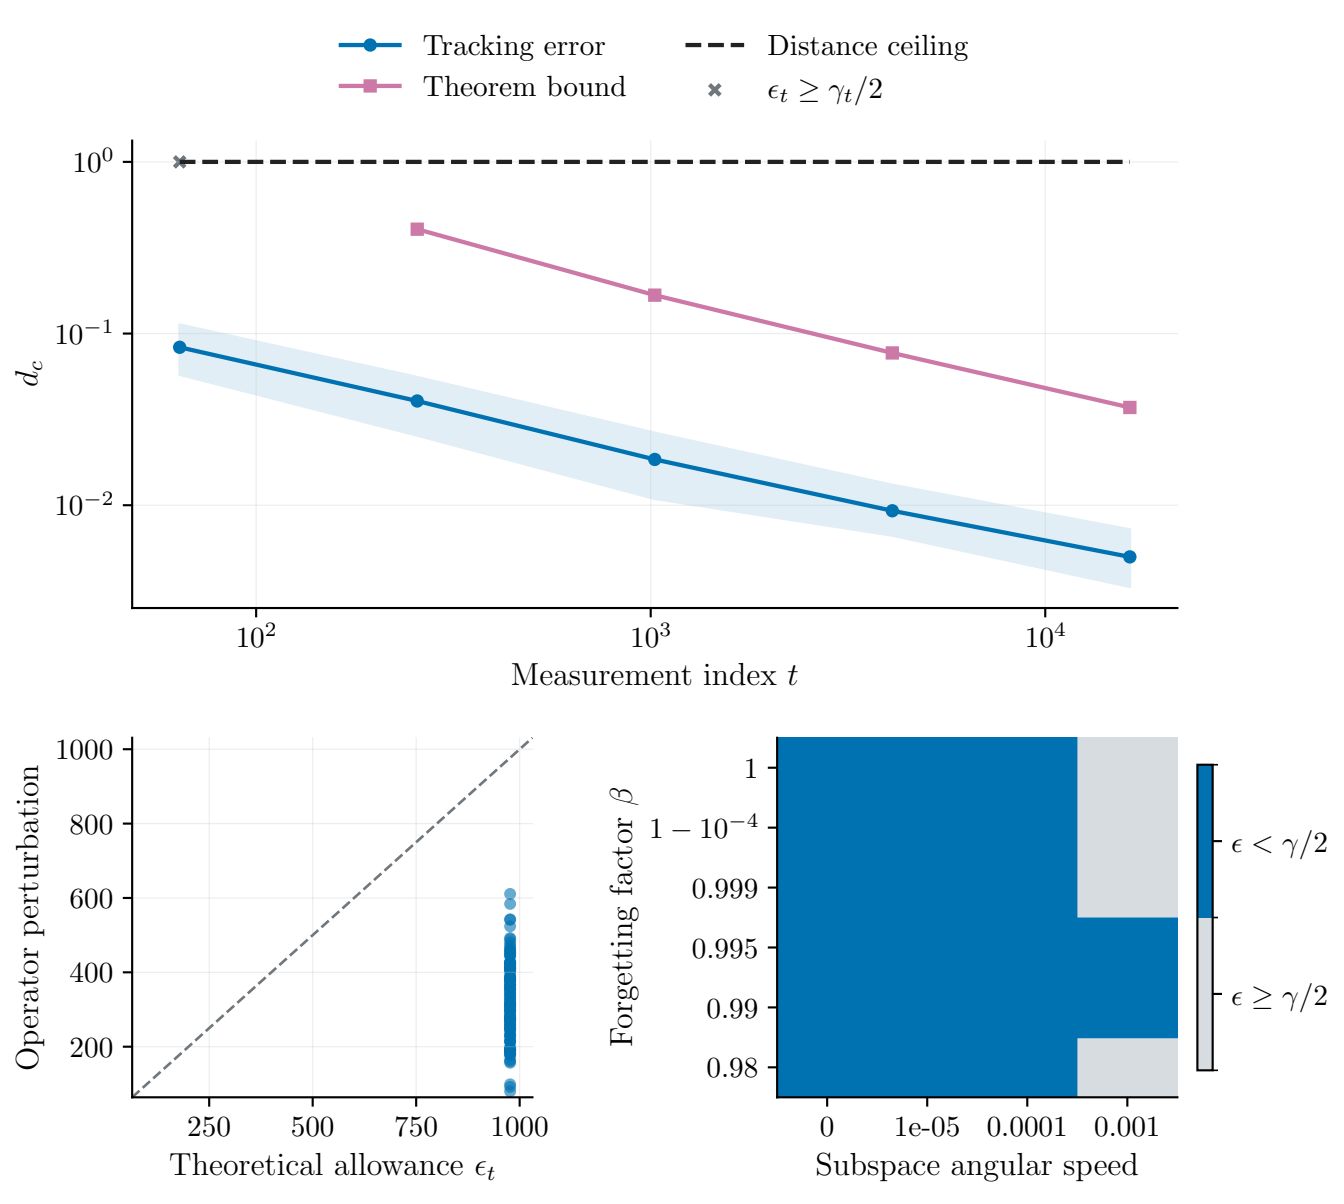
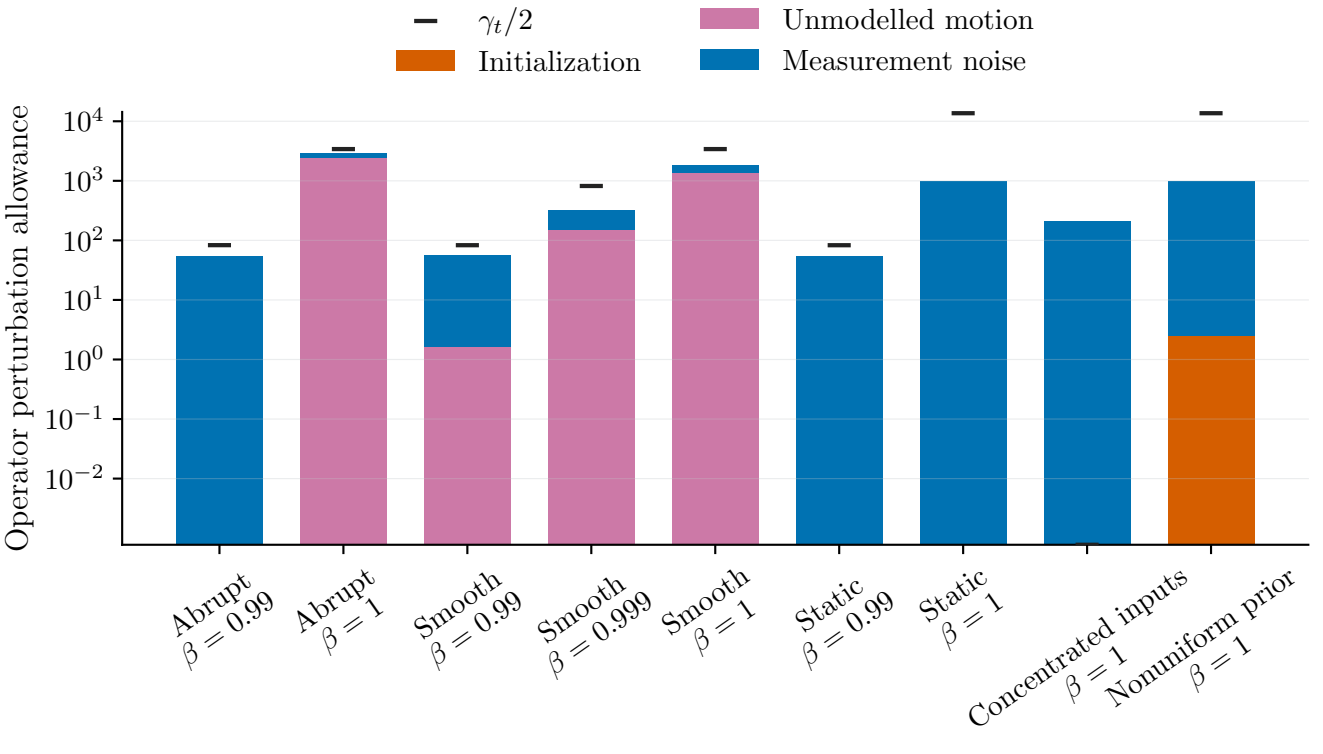
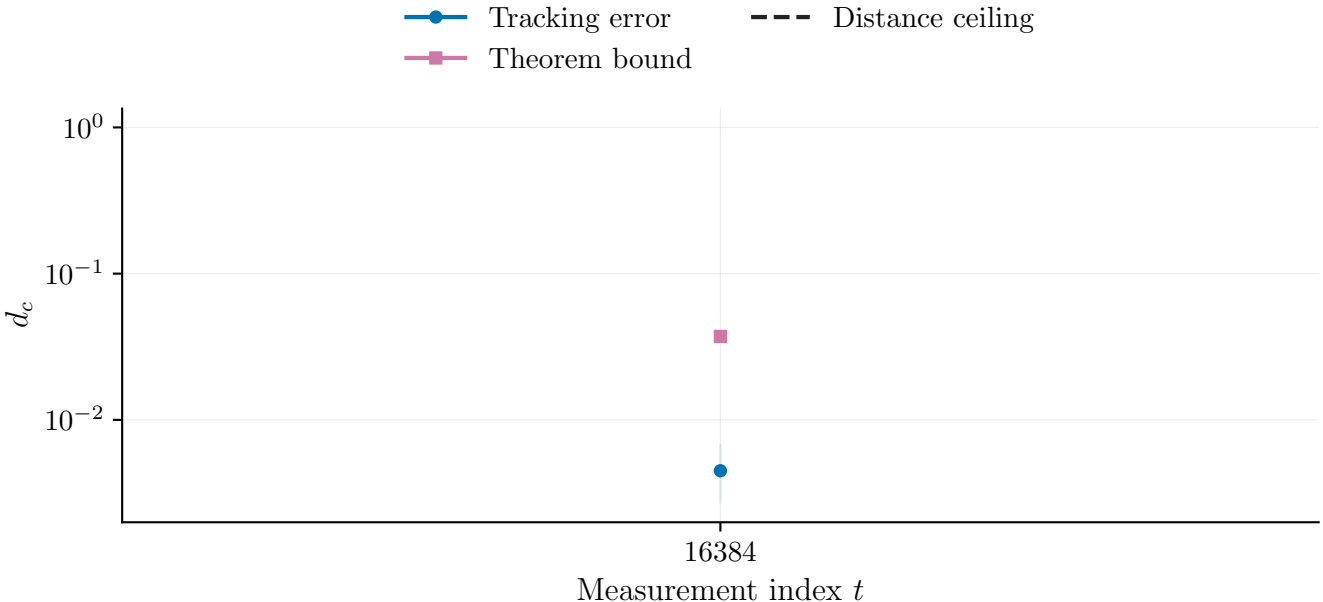

0.6
0.0
−0.6
z_2
−0.6
0.0
0.6
z_1
$D_{\mathrm{KL}} = 0.01$
$D_{\mathrm{KL}} = 0.05$
$D_{\mathrm{KL}} = 0.15$
$D_{\mathrm{KL}} = 0.3$

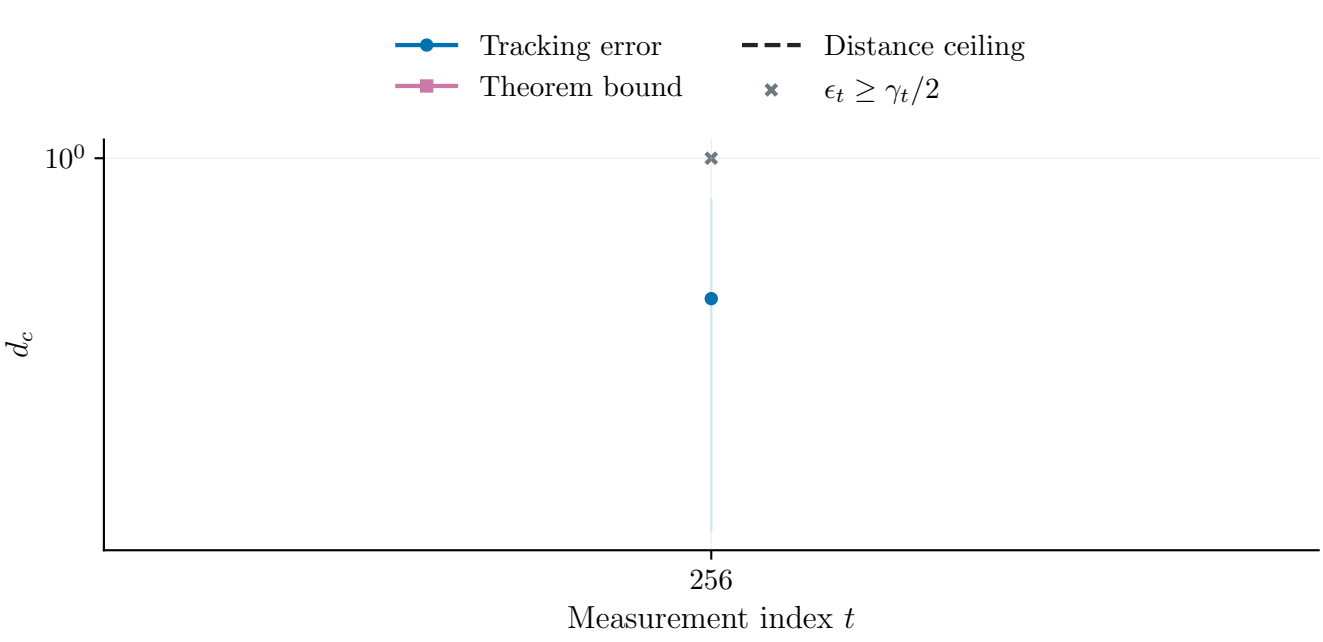

10^{1}
10^{-2}
10^{-5}
$D_{\mathrm{KL}}(p_0 \,\|\, p_z)$
0
10
20
30
δ (°)
$z = (\tan\delta, 0)^\top$
$z = (0, \tan\delta)^\top$


Local regime
Outside local regime
Empirical log-coordinate variance
10^{-1}
10^{-2}
10^{-3}
10^{-3}
10^{-2}
10^{-1}
H_A^{-1} tangent variance
Empirical MSE
$\mathrm{tr}(\mathcal{F}^{-1})$
Squared tangent error
10^{-1}
10^{-2}
10^{-3}
10^{1}
10^{2}
10^{3}
Block length L
Local fraction
Bias/$\sqrt{\mathrm{tr}(\mathcal{F}^{-1})}$
Local fraction / normalized bias
1.0
0.8
0.6
0.4
0.2
0.0
10^{1}
10^{2}
10^{3}
Block length L


Tracking error
Theorem bound
Distance ceiling
$\epsilon_t \geq \gamma_t/2$
10^0
10^{-1}
10^{-2}
d_c
10^2
10^3
10^4
Measurement index t
1000
800
600
400
200
Operator perturbation
250
500
750
1000
Theoretical allowance ϵ_t
1
$1 - 10^{-4}$
0.999
0.995
0.99
0.98
Forgetting factor β
0
1e-05
0.0001
0.001
Subspace angular speed
$\epsilon < \gamma/2$
$\epsilon \geq \gamma/2$


$\gamma_t/2$
Initialization
Unmodelled motion
Measurement noise
Operator perturbation allowance
10^4
10^3
10^2
10^1
10^0
10^{-1}
10^{-2}
Abrupt $\beta = 0.99$
Abrupt $\beta = 1$
Smooth $\beta = 0.99$
Smooth $\beta = 0.999$
Smooth $\beta = 1$
Static $\beta = 0.99$
Static $\beta = 1$
Concentrated inputs $\beta = 1$
Nonuniform prior $\beta = 1$


Tracking error
Distance ceiling
Theorem bound
10^{0}
10^{-1}
10^{-2}
d_c
16384
Measurement index t


Tracking error
Theorem bound
Distance ceiling
$\epsilon_t \geq \gamma_t/2$
10^0
d_c
256
Measurement index t