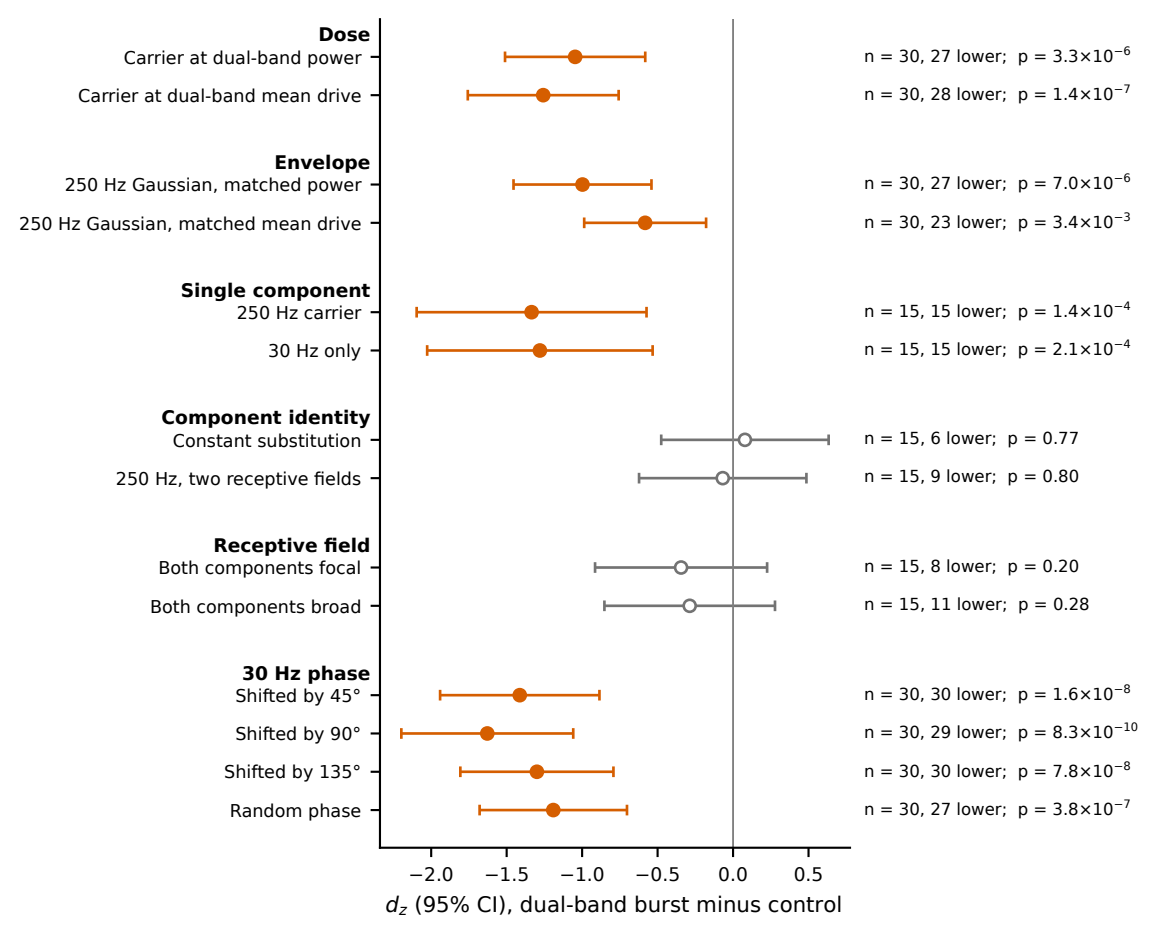

Dose
Carrier at dual-band power
Carrier at dual-band mean drive
Envelope
250 Hz Gaussian, matched power
250 Hz Gaussian, matched mean drive
Single component
250 Hz carrier
30 Hz only
Component identity
Constant substitution
250 Hz, two receptive fields
Receptive field
Both components focal
Both components broad
30 Hz phase
Shifted by 45°
Shifted by 90°
Shifted by 135°
Random phase
n = 30, 27 lower; p = 3.3×10−6
n = 30, 28 lower; p = 1.4×10−7
n = 30, 27 lower; p = 7.0×10−6
n = 30, 23 lower; p = 3.4×10−3
n = 15, 15 lower; p = 1.4×10−4
n = 15, 15 lower; p = 2.1×10−4
n = 15, 6 lower; p = 0.77
n = 15, 9 lower; p = 0.80
n = 15, 8 lower; p = 0.20
n = 15, 11 lower; p = 0.28
n = 30, 30 lower; p = 1.6×10−8
n = 30, 29 lower; p = 8.3×10−10
n = 30, 30 lower; p = 7.8×10−8
n = 30, 27 lower; p = 3.8×10−7
−2.0
−1.5
−1.0
−0.5
0.0
0.5
dz (95% CI), dual-band burst minus control