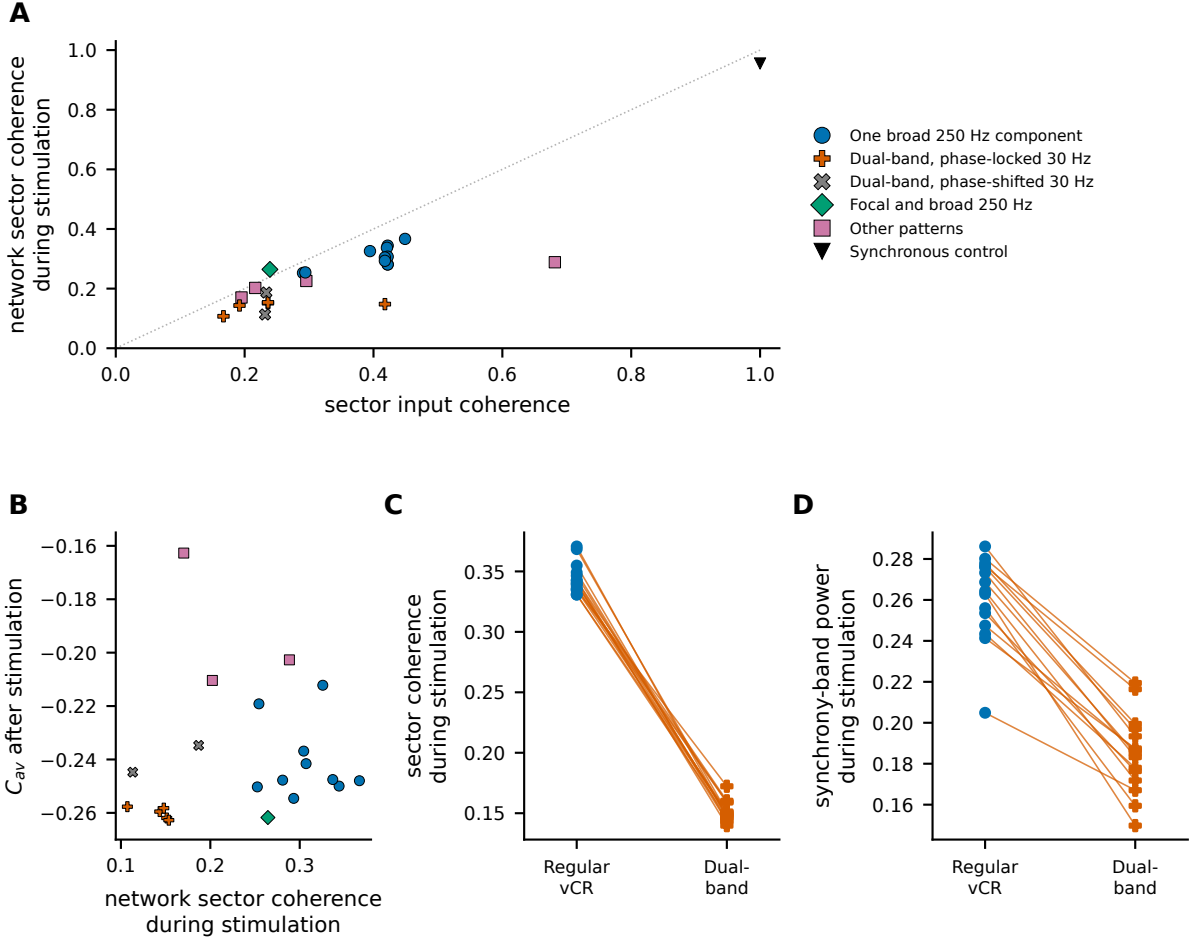

A
network sector coherence during stimulation
sector input coherence
One broad 250 Hz component
Dual-band, phase-locked 30 Hz
Dual-band, phase-shifted 30 Hz
Focal and broad 250 Hz
Other patterns
Synchronous control
B
C_{av} after stimulation
network sector coherence during stimulation
C
sector coherence during stimulation
Regular vCR
Dual-band
D
synchrony-band power during stimulation
Regular vCR
Dual-band