

DESIGN CREDIT **REPORT**

TOPIC: WASTE VALORIZATION

SUBMITTED BY:

Palak Bhawsar (B22CH018)
Shubham kumar (B22CI038)

Under the Support and Guidance of
Dr.Sumit Kamal
Chemical Engineering



॥ त्वं ज्ञानमयो विज्ञानमयोऽसि ॥

Indian Institute of Technology, Jodhpur
November 2023

OVERVIEW

- Introduction
- Literature Review
- Methodology
- Results and Discussion
- Challenges and Solutions
- Conclusion
- References

CHAPTER-1

INTRODUCTION

- 1.1 Background and motivation for the project
- 1.2 Objectives of the project
- 1.3 Scope of the project

CHAPTER-2

Literature review

- 2.1 Overview of Waste Valorization
- 2.2 Environmental Impact of Traditional Waste Management
- 2.3 Technologies and Methods for Waste Valorization

CHAPTER-3

Methodology

- 3.1 Selection of Waste Stream
- 3.2 Characterization of Waste
- 3.3 Valorization Process

CHAPTER-4

Results and Discussion

- 4.1 Economic Viability
- 4.2 Environmental Impact

CHAPTER-5

Challenges and Solutions

- 5.1 Identify Challenges
- 5.2 Proposed Solutions

CHAPTER-6

Conclusion

- 6.1 Summarize Key Findings

CHAPTER-1

INTRODUCTION

Waste management is a critical concern in contemporary society, with escalating rates of waste generation posing significant environmental challenges. In our project, we focus on the burgeoning issue of [solid waste], which has reached unsustainable levels, impacting ecosystems and public health.



Firstly, we aim to develop an efficient gasification process for solid waste. Gasification is a process that converts organic or fossil fuel-based carbonaceous materials into synthetic gas such as carbon monoxide, hydrogen, and carbon dioxide.

Secondly, we concentrate on the processes of extracting valuable metals for reuse and the safe removal of hazardous materials during the disposal of solar panels. Motivated by the urgency to adopt sustainable practices, the project's objectives include generating valuable synthetic gas and Utilizing e-waste.

Objectives:

- The primary focus is on efficiently converting solid waste through gasification and optimizing burner design for increased efficiency.

- Additionally, the initiative aims to address challenges related to the disposal of end-of-life solar panels, with a specific emphasis on extracting valuable metals and safely removing hazardous materials.

CHAPTER-2

Literature review

Waste valorization is a process that transforms waste materials into valuable resources, emphasizing sustainability and environmental benefits. It involves techniques such as gasification to efficiently convert solid waste into useful products. The approach aims to optimize resource recovery, reduce environmental impact, and promote circular economy principles by extracting value from materials that would otherwise be discarded. Waste valorization contributes to both waste management and sustainable resource utilization efforts.

Traditional waste management practices, including landfill disposal and incineration, have substantial environmental impacts. Landfills generate methane, a potent greenhouse gas, contributing to climate change. Incineration releases pollutants and emits greenhouse gasses, further worsening air quality and environmental health. Both methods can contaminate soil and water, posing risks to ecosystems and human health. Additionally, the energy-intensive nature of incineration adds to the carbon footprint. These environmental drawbacks underscore the urgency for more sustainable waste management approaches to mitigate these adverse effects.

Various technologies and methods play a crucial role in waste valorization, with a focus on extracting useful metals and employing gasification techniques. Advanced metal extraction processes, such as hydrometallurgy and pyrometallurgy, enable the recovery of valuable metals from electronic and industrial waste. Gasification, on the other hand, involves converting solid waste into syngas, a versatile fuel. This process not only reduces the volume of waste but also produces a valuable energy source. Integrating these methods into waste valorization strategies promotes resource efficiency, minimizes

environmental impact, and contributes to a more sustainable approach to waste management.

CHAPTER-3

Methodology

A). Co-Gasification

Solid waste encompasses the discarded or nonessential solid materials produced from human activities in residential, industrial, or commercial settings. In our context, we are specifically addressing municipal waste such as plastics and garden waste. This targeted approach recognizes the prevalence of these materials and emphasizes their significance in waste management considerations.

In our approach, we employed [gasification](#), a transformative process that converts organic materials, including waste, biomass, or coal, into a versatile mixture of gasses known as syngas (synthetic gas). In this process, controlled partial combustion in an oxygen-starved environment breaks down complex carbon-based materials into simpler compounds, unlocking their energy potential for sustainable applications.

Before proceeding for gasification we need to do feedstock preparation, It involves the pre-treatment and conditioning of raw materials. This process typically includes shredding, drying, and sizing the feedstock having cylindrical shape with 25 mm length and 8 mm diameter, optimizing its physical and chemical properties. Effective feedstock preparation ensures uniformity, enhances reactivity, and improves the efficiency of the gasification process by facilitating the breakdown of organic materials into syngas.

In our current project, we focused on Co-gasification, a specialized field within gasification that involves the simultaneous use of multiple feedstocks. Specifically, in our study feedstocks that we worked with were made of paper,plastics,leather and textile.


Now let's us understand how we had done gasification step by step :

- [Gasifier Setup](#)- Gasification experiments are carried out in a fixed bed downdraft gasifier.The gasifier operates autothermally with a feed rate of 10-15 kg/h and has a holding capacity of 40 kg. There are four points around the gasifier that are designated

for primary air supply, facilitated by a blower. The primary air, used as the gasification medium, is supplied to the combustion zone using a blower (1 hp) at four points in the same level along the periphery of the gasifier. The flow rate of air to the gasifier is regulated using a ball valve. Solid feedstock in the gasifier is entirely supported on a plural cylindrical bar type grate, provided near the end of the gasification zone. The grate is mounted on a vertical shaft, which can be moved mechanically or manually using the handle attached to the shaft. The grate movement provides the provision for removing the ash and the unreacted char during the gasification process.

- **Measurement tools**-Temperatures, flow rates, and gas composition are measured, and tar content is analyzed using gas chromatography. Gas quantity and calorific value are estimated using nitrogen balance.
- **Process**-
 1. In each experimental run, 25 kg of feedstock is loaded into the gasifier and ignited with a butane torch.
 2. Gas composition and tar sampling commence, with gas collected at intervals for analysis.
 3. The burner flame quality serves as an indicator of gas production. After feed consumption, the gasifier is cooled, and residue is collected for analysis.
 4. The process is considered steady-state when the temperature stabilizes.

The gas formed will leave the gasifier through the pipeline fixed near the gas exit zone, wherein provisions are made for gas sampling to determine the producer gas composition and tar yield. By making variations in grate movement, equivalence ratio, and feedstock type, we can get different results; it will be covered in the upcoming chapters.

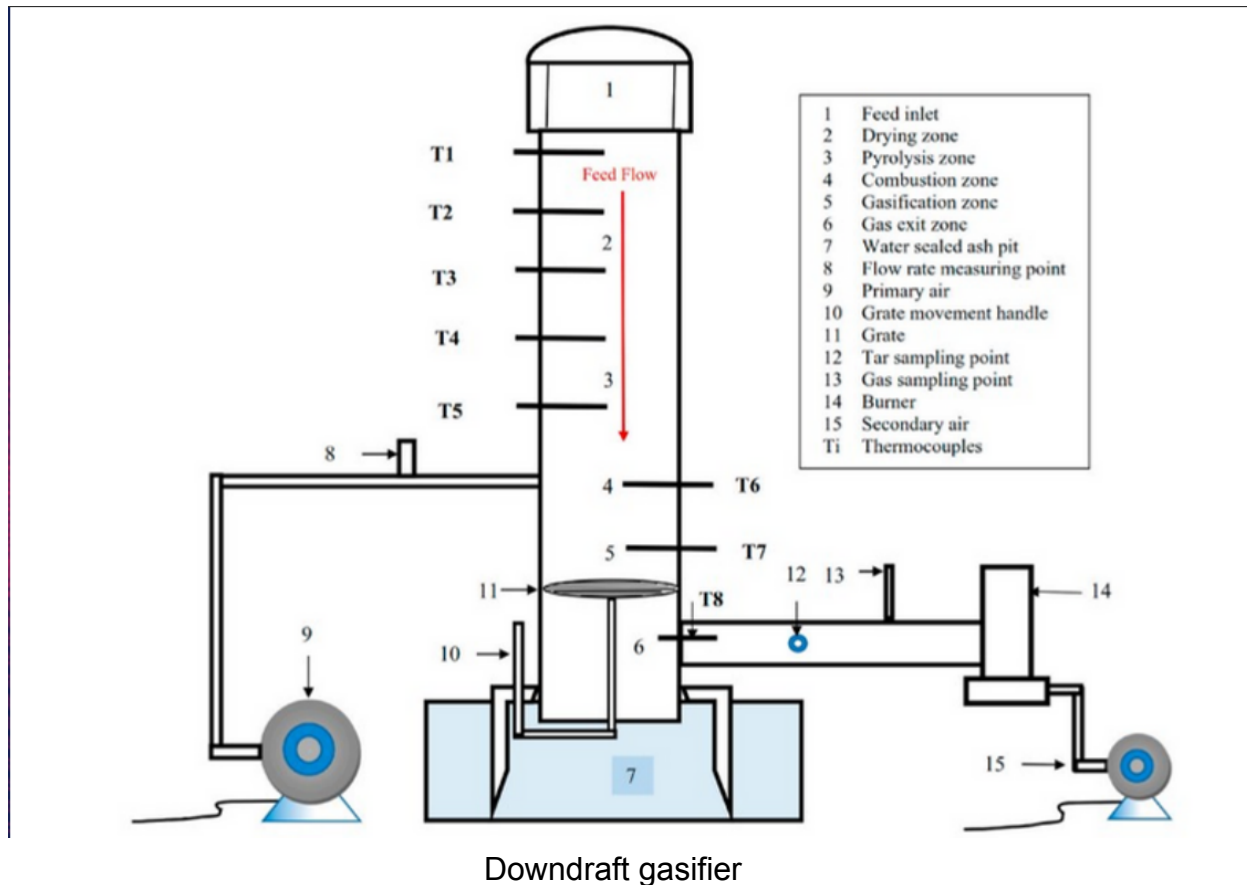

B). Extraction and Removal of Metals

Another type of solid waste is solar waste, which refers to the end-of-life or decommissioned solar panels. Solar waste includes materials such as metals and glass from these panels. Managing solar waste is crucial for environmental sustainability, requiring proper recycling or disposal methods to minimize its impact on ecosystems and human health.

Before moving ahead let us first discuss about different types of solar panels-

- Crystalline Silicon Solar Panels (Monocrystalline and Polycrystalline)
- Copper Indium Gallium Selenide (CIGS) solar panels
- Cadmium Telluride (CdTe) thin-film solar panels.

Here in this project we will focus on [Polycrystalline Silicon Solar Panels](#) as they are the most used solar for home appliances in India.

Composition:


METALS	Roles(or use) In solar panel	Percentage of Panel's Weight
Silicon (Si)	Primary semiconductor material in crystalline silicon solar panels	90%
Aluminum(Al)	Used for the panel's frame, providing structural support and protection	5-10%
Silver(Ag)	Used for electrical contacts and busbars to efficiently collect and conduct electricity	0.3-0.5 %
Copper(Cu)	Used in electrical contacts and wiring within the solar cells and junction box	0.1-0.3%
Trace metals(Tin,lead,)	Used in components like soldering materials	<0.1%

- Silver and copper are some of the most valuable components found in Crystalline Silicon Solar Panels.
- Lead is one of the most hazardous elements present in solar panels, hence its removal before disposal is necessary.

Let's now focus on the extraction process of silver and copper, as well as the removal of lead:

- [Pre-processing](#)- This includes the measurement of the initial content of metal in the given solar panel.We can achieve this using the above given information about the composition of solar panels.

- **Milling and Sieving-** Using different instruments it is divided into smaller pieces.
- **Heating-** In this process we heat the solar panels using heating machines to remove glasses and to remove the organics from the waste PV module.
- **Leaching-** Then we leached the entire composition with the help of 64% nitric acid.
- **Extraction of Silver-** For this purpose we used 99% of NaCl to precipitate the silver in the form of AgCl. Then using the filtration process we removed it from solution. Then we used some reducing agents to obtain Ag from AgCl.
- **Extraction of Copper-** (1) Cu extraction from the leaching solution involved using 20% LIX84-I to separate Cu ions from an HNO₃ solution containing Ag and Pb. The resulting solutions were divided into two parts: one with LIX84-I and Cu and the other with the HNO₃ solution.
 (2) Stripping Cu from the LIX84-I fraction was achieved by adding a 150 g/L H₂SO₄ solution, causing Cu to move to the H₂SO₄ solution as CuSO₄, using a 4:1 Organic/Aqueous solution ratio.
 (3) A 24-hour electrowinning method was applied to recover Cu metal. This involved using 200 L of H₂SO₄ solution containing 50 g/L Cu at 50 °C, with a current density of 0.5 A/dm². Titanium and Cu plates served as the anode and cathode, respectively, with an 11.5 cm distance between them.
- **Removal of Lead-** (1) Pb²⁺ ions in a leaching solution was treated with 5 M NaOH at room temperature, resulting in the formation of lead II hydroxide (Pb(OH)₂) precipitate. The precipitate was then separated through filtration.
 (2) The obtained Pb(OH)₂ was subjected to heating at 500 °C for 1 hour, yielding lead oxide (PbO).
 (3) To eliminate any remaining Pb in the HNO₃ solution, 5 M sodium sulfide (Na₂S) was added, causing the precipitation of lead sulfide (PbS). The lead sulfide was subsequently removed through filtration.

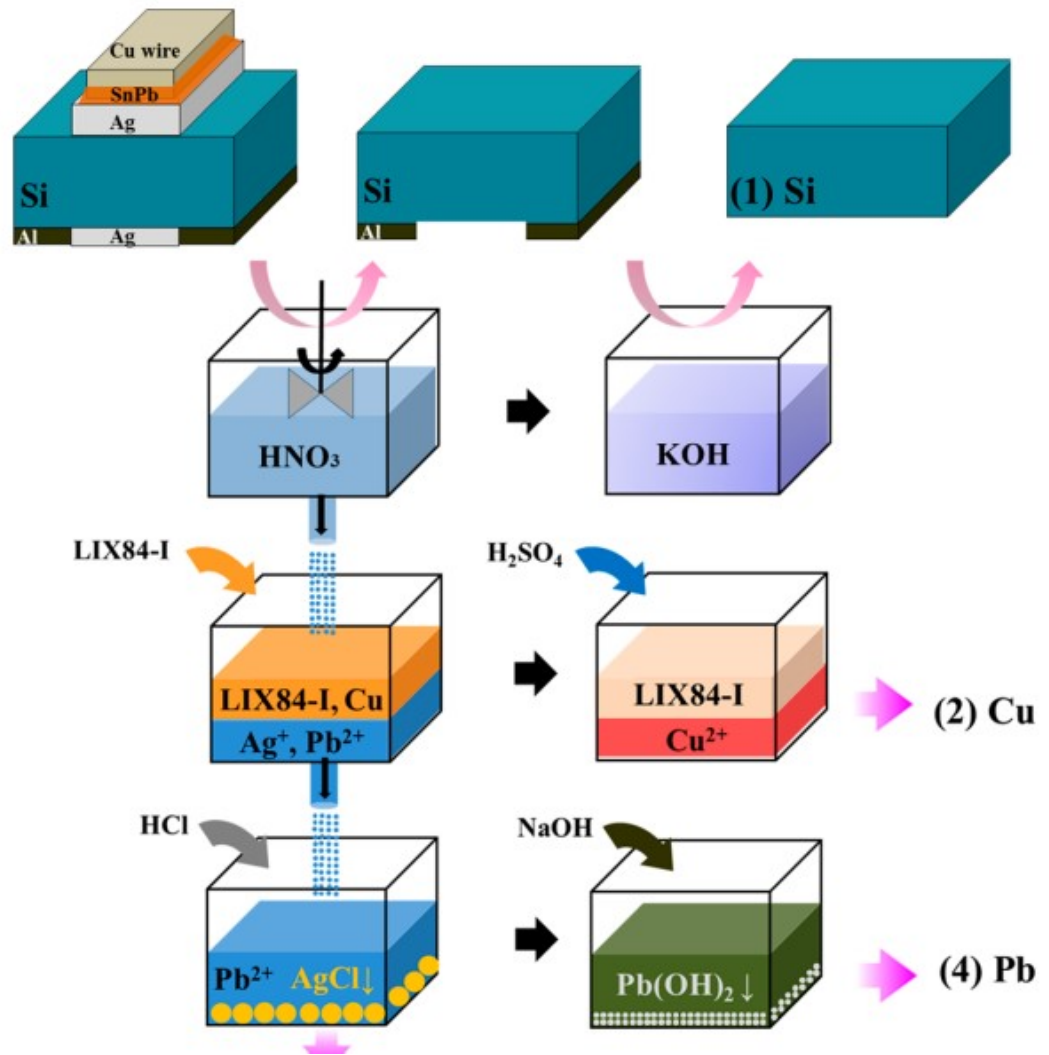

CHAPTER-4

Results and Discussion

A). Co-Gasification

For 75% feed stock and 25% saw dust, grate movement interval of 10 min and equivalence ratio approx 0.3 ; the values of

- Cold gas efficiency(CGE)=59.24%.

- Lower Heating Value (LHV)= 4.34 MJ/Nm³
- Tar content = 13.6g/Nm³ - 8.8g/Nm³

B.) Extraction and Removal of Metals

- In the first method(without heating), the silver concentration yield was 94%.
- In the second method,subjected to pyrolysis at 500 C the silver concentration yield was 92%.
- We achieved a Cu recovery rate of 79% .
- We were able to achieve a removal rate of 93% for Pb through neutralization and sulfurization.

CHAPTER-5

Challenges and Solutions

A). Co-Gasification

One of the biggest challenges was to increase the efficiency of the process. For that we made some changes in the feedstock content, burner design etc.

Change In Feedstock Content:

Here we changed the feedstock content to plastic(low density polythene) and garden waste .

We performed a Co-gasification process on this feedstock as mentioned in previous chapters.

The results we obtained:

- Cold gas efficiency(CGE)= 61.8%.
- Lower Heating Value (LHV)= 4.7 MJ/Nm³


- Tar content = 8.1g/Nm^3 - 5.7g/Nm^3

It is evident from above results in an overall efficient process.

Change in Burner Design:

We changed the design of the existing conventional burner to a premix burner. It has a dual swirl vane with angle(32 and 45) which helps in the mixing of air-fuel (producer gas and air) more efficiently. Resulting overall increase in the process efficiency.

Premix Burner

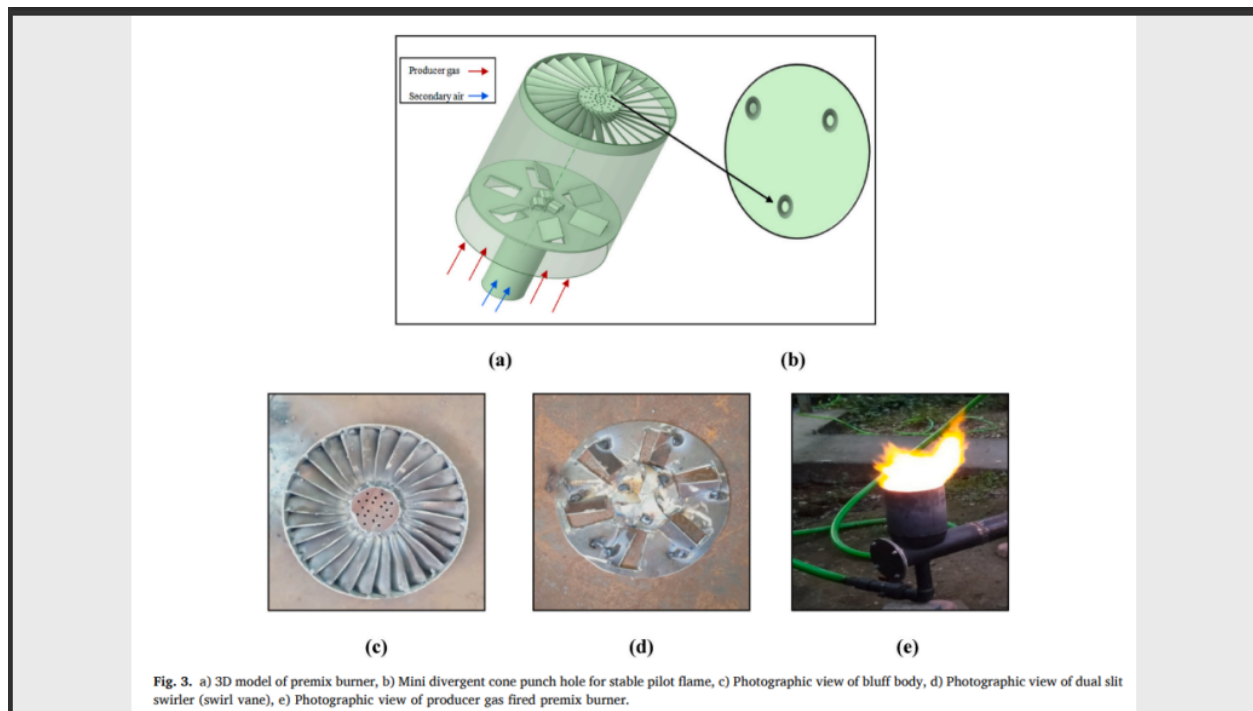

Conventional Burner


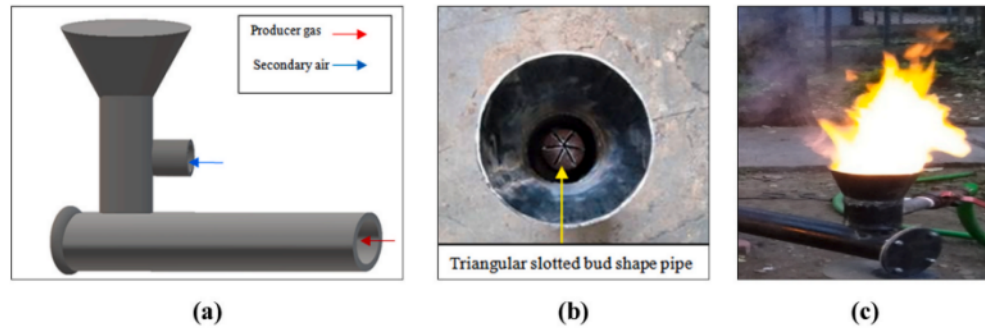


Fig. 2. a) 3D model of conventional burner, b) Top view of conventional burner (triangular shape cutting on bud shape pipe for fuel distribution), c) Photographic view of a conventional burner.

'Y' Shape burner line

The producer gas outlet line from the gasifier was connected to the 'Y' shape line and the two ends of the 'Y' were further connected each to PB and CB. The entire 'Y' shape gas line and both the burners were insulated with ceramic wool with a thickness of 40 mm and covered over it with a thin 25-gauge aluminium sheet to maintain adiabatic conditions. Three blowers each of 1 hp capacity was used for forced draft gasification. One blower was used to supply air to the gasifier in the combustion zone of the downdraft gasifier reactor. The other two were used to supply secondary air to premix and conventional burner.

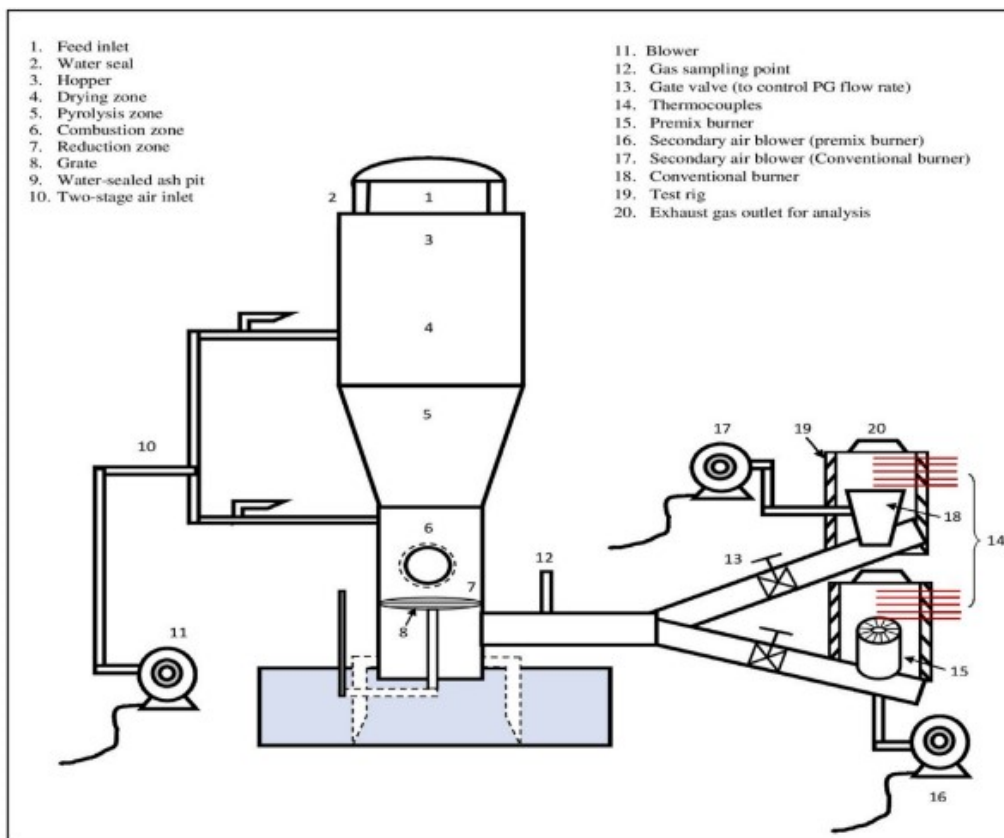

1. Schematic diagram of experimental set up of downdraft gasifier with premix and conventional burner connected to 'Y' shape gas producer gas line.

B.) Extraction and Removal of Metals

- The extraction of metals using the above methods provide us with good results proving it to be efficient.
- But the acids used during the leaching process are also hazardous as they can cause severe effects on the person using it and also it is only one use leading to the secondary pollution.
- To overcome this we used the Deep-Eutectic Solvents System (DES).
- They are organic solvents which are almost as efficient as nitric acid in the leaching process.
- Also, if we can use the same leaching solution for more than one time.

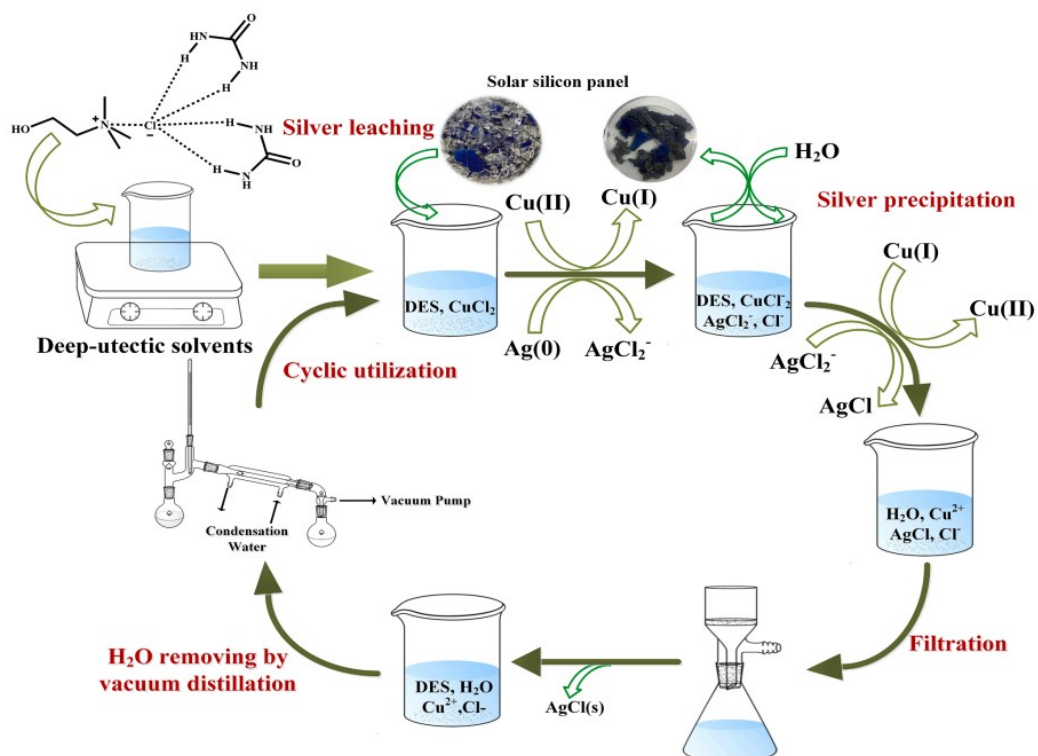


Fig. 1. General flow chart for recycling silver from photovoltaic panel.

CHAPTER-6

Conclusion

We have successfully acquired the knowledge to undertake waste valorization through two distinct methods i.e. Co-gasification and Extraction of metals. We also learned about the different aspects on which their efficiency depends and how.

References:

1. <https://doi.org/10.1016/j.energy.2023.128140>
2. <https://doi.org/10.1016/j.wasman.2016.03.016>
3. <https://doi.org/10.1016/j.energy.2022.125659>
4. <https://pubs.acs.org/doi/full/10.1021/acssuschemeng.6b00894>

CONTRIBUTION

1. Co-gasification of Solid waste was done by Palak Bhawsar
2. Extraction and removal of metals was done by Shubham Kumar