

 OUR COMMITMENT TO YOU

IDEAL FOR HOT & COLD WATER PLUMBING



uPVC **GOLD**



WHAT'S INSIDE?

INDEX

ABOUT PODDAR PIPES	01
CERTIFICATIONS	02
WHY CHOOSE PODDAR PIPES?	03
ASSURANCES	04
WHAT IS UPVC?	06
CHEMICAL RESISTANCE OF UPVC	07
FIELDS OF APPLICATION	09
FIELDS OF APPLICATION	09
PROPERTIES OF UPVC	15
DIMENSION AND WATER PRESSURE RATING	17
TAPERED SOCKETS FOR UPVC	18
QUALITY CONTROL PROCEDURES AT PODDAR	19
HANDLING AND STORAGE	20
INSTALLATION GUIDE	21
SOLVENT ADHESIVE	22
INSTALLATION WARNING	23
FITTINGS - DIMENSIONS	24
FREQUENTLY ASKED QUESTIONS	32
WARRANTY AND LIMITATIONS	34







A LEGACY OF QUALITY

ABOUT PODDAR PIPES

Poddar Pipes are engineered to strengthen and elevate infrastructure of every scale, delivering solid and dependable foundations even for the most complex and demanding project requirements. Our forward-thinking piping solutions have earned the trust of engineers, builders, and architects across the industry, who rely on them to ensure seamless system integration and consistently optimal performance over the long term. When you choose Poddar, you invest in pipes that are built to reinforce your vision, support your goals, and take your project to the next level.



Certificates





PERFORMANCE YOU CAN DEPEND ON

WHY CHOOSE PODDAR PIPES?

WITHSTANDS PRESSURE

Poddar Pipes are engineered to endure high pressure, ensuring long-lasting reliability and performance.

WIDE RANGE

Explore our extensive range of pipes, designed to meet diverse needs across industries.

CERTIFIED MATERIAL

Made from certified materials, Poddar Pipes guarantee safety, strength, and durability.





OUR COMMITMENT TO YOU

BUILT ON TRUST AND ASSURANCES

Every pipe and fitting that leaves our facility carries with it a promise — a promise of quality, precision, and performance that you can rely on. The following assurances reflect the standards, technologies, and practices that define how Poddar Pipes operates, and why professionals across the industry continue to choose us.

PRECISION MANUFACTURING LINES

Manufactured on state-of-the-art extrusion lines that are designed and maintained to deliver consistent product quality, precise dimensional accuracy, and dependable long-term performance across every single unit produced.

100% VIRGIN RAW MATERIALS

Made exclusively using 100% virgin raw materials, ensuring that every pipe and fitting delivers superior structural strength, enhanced durability, and a level of product consistency that recycled or inferior materials simply cannot match.

INTERNATIONAL QUALITY STANDARDS

All pipes and fittings are manufactured in strict compliance with IS 16098 and EN 1401 standards, providing customers with the assurance that every product meets nationally and internationally recognised quality benchmarks.

BATCH-BY-BATCH DIMENSIONAL VERIFICATION

Every production batch undergoes thorough dimensional checks and verification procedures before dispatch, ensuring that all products conform precisely to the required specifications and applicable standards before reaching the customer.

TESTED FOR UNDERGROUND STRENGTH

Ring stiffness is comprehensively tested on all relevant products to confirm reliable underground performance, resistance to external loading, and the long-term structural stability required for subsurface installations.

LIGHTWEIGHT YET STRUCTURALLY RIGID

Advanced foam core technology is employed to enhance overall pipe rigidity and structural integrity, while simultaneously reducing the total weight of the pipe for significantly easier on-site handling and faster installation.

GUARANTEED LEAK-PROOF JOINTS

Fully leak-proof joints are consistently achieved through the use of pre-fitted Black Seal rubber rings, which are engineered to deliver a secure, dependable, and long-lasting sealing performance across all connection points.

ISI CERTIFIED, INDUSTRY COMPLIANT

All ISI certified products are manufactured in full compliance with applicable government and industry standards, ensuring that every product meets the required benchmarks for quality, operational safety, and long-term reliability.

ITALIAN TECHNOLOGY, GLOBAL EXPERTISE

Manufactured under a dedicated technical collaboration with Redi, Italy, our products benefit from advanced European manufacturing technology and decades of proven expertise, bringing world-class piping solutions to the Indian market.

VERSATILE RANGE, ENDLESS APPLICATIONS

Available across a comprehensive range of sizes and compatible fittings, our products are designed to meet the diverse requirements of both residential and commercial applications with equal ease and reliability.



TECHNICAL DETAILS

LEADING THE WAY IN PIPE TECHNOLOGY

Innovation drives everything we do at Poddar. We constantly embrace advanced technology to create pipes that meet the changing demands of modern infrastructure. Our products are engineered for maximum efficiency, simple installation, and exceptional durability. With Poddar Pipes, you benefit from innovative piping solutions built to deliver lasting performance.





TECHNICAL DETAILS

WHAT IS UPVC?

uPVC pipes are manufactured using a strong blend of plastic and vinyl, offering excellent durability, impact resistance, and a long service life. They are resistant to rust, corrosion, and decay, making them ideal for cold water plumbing, water supply, underground drainage, and sewage applications. Their flexibility and strength allow them to withstand ground movement, making them well-suited for earthquake-prone regions. The smooth inner surface also helps prevent bacterial buildup, including E. coli, ensuring clean and hygienic water distribution systems.

PHYSICAL PROPERTIES

Property	Value
Density [g/cm ³]	1.3 - 1.45
Thermal conductivity [w/(m.k)] 0.14 -	0.14 - 0.28
Yield strength [MPa]	31 - 60
Young's modulus [psi]	490,000
Flexural strength (yield) [psi]	10,500
Compression strength [psi]	9500
Coefficient of thermal expansion (linear) [mm(mmoC)]	5 x 10 - 5
Vicat B [°C]	>83°C
Resistivity [Ωm]	10 ¹⁶
Surface resistivity [Ω]	10 ¹³ - 10 ¹⁴

FIRE RESISTANT

uPVC is naturally self-extinguishing and does not promote combustion, making it well suited for residential and commercial buildings. It has a High Limiting Oxygen Index (LOI) of 45 to ignite, and because the Earth's atmosphere contains only 21% oxygen, uPVC will not burn without continuous exposure to a flame, extinguishing immediately once the heat source is removed.

Material	LOI
Cotton	16 - 17
Polypropylene (PP)	18
Polyethylene (PE)	18
Wood	20
Atmospheric content of OXYGEN	21
uPVC	45
CPVC	60

FEATURES OF UPVC

LEAD FREE

Entirely lead-free, providing clean, safe, and healthy water for you and your family.

FREEDOM FROM TOXICITY, ODOURS, TASTES

Ensures water remains pure, odour-free, and completely free from any unwanted taste.

COST EFFECTIVE

A cost-effective, long-term solution designed to reduce both installation and maintenance expenses.

EASY TO INSTALL

Lightweight and easy to handle, reducing installation time while lowering overall labour costs.

STRONG AND DURABLE

Engineered to resist daily pressure and wear, ensuring dependable performance for years to come.

UV RESISTANT

Designed to withstand prolonged sun exposure, retaining its strength and colour even in harsh sunlight.

GOOD CHEMICAL RESISTANCE

Resists a wide range of chemicals without corroding, deteriorating, or compromising its structural integrity.

GOOD CORROSION RESISTANCE

Completely resistant to rust and corrosion, ensuring cleaner water flow and extended pipe life.

FIRE RESISTANT

Does not support combustion, making it a safer option for residential and commercial applications.

LOW THERMAL CONDUCTIVITY

Provides natural insulation to help retain water temperature while enhancing overall energy efficiency.

SOLVENT ADHESIVE JOINTING

Creates strong, leak-proof joints with solvent cement, ensuring quick installation without the need for special

MAINTENANCE-FREE

After installation, uPVC pipes need minimal maintenance, helping save both time and long-term costs.



TECHNICAL DETAILS

CHEMICAL RESISTANCE OF uPVC

A

Chemical	23°C (73°F)	60°C (140°F)
Acetaldehyde	N	N
Acetaldehyde, aq 40%	C	N
Acetamide - -	-	-
Acetic acid, vapor	R	R
Acetic acid, glacial	R	N
Acetic acid, 25%	R	R
Acetic acid, 60%	R	N
Acetic acid, 85%	R	N
Acetic anhydride	N	N
Acetone	N	N
Acetylene	N	N
Acetyl chloride	N	N
Acetylnitrile	N	N
Acrylonitrile	N	N
Acrylic acid	N	N
Adipic acid	R	R
Alcohol, allyl	R	C
Alcohol, amyl	N	N
Alcohol, benzyl	N	N
Alcohol, butyl (n-butanol)	R	R
Alcohol, diacetone	N	N
Alcohol, ethyl (ethanol)	R	R
Alcohol, hexyl (hexanol)	R	R
Alcohol, isopropyl (2-propanol)	R	R
Alcohol, methyl (methanol)	R	R
Alcohol, propyl (1-propanol)	R	R
Alcohol, propargyl	R	R
Allyl chloride	N	N
Alums	R	R
except Aluminim fluoride	R	N
Ammonia, gas	R	R
Ammonia, liquid	N	N
Ammonium salts	R	R

Chemical	23°C (73°F)	60°C (140°F)
except Ammonium Dichromate	R	N
Ammonium fluoride, 10%	R	R
Ammonium fluoride, 25%	R	C
Amyl acetate	N	N
Amyl chloride	N	N
Aniline	N	N
Aniline chlorohydrate	N	N
Aniline hydrochloride	N	N
Anthraquinone	R	R
Antimony trichloride	R	R
Anthraquinone sulfonic acid	R	R
Aqua regia	C	N
Arsenic acid, 80%	C	N
Aryl-sulfonic acid	R	R

B

Barium salts	R	R
except Barium nitrate	R	N
Beer	R	R
Beet sugar liquor	R	R
Benzaldehyde, 10%	R	N
Benzene (benzol)	N	N
Benzene sulfonic acid, 10%	R	R
Benzene sulfonic acid, > 10%	N	N
Benzoic acid	R	R
Black liquor – paper	R	R
Bleach, 12% active chlorine	R	R
Bleach, 5% active chlorine	R	R
Borax	R	R
Boric acid	R	R
Brine	R	R
Bromic acid	R	R
Bromine, aq	R	R
Bromine, liquid	N	N

R - GENERALLY RESISTANT / C - LESS RESISTANT THAN R BUT STILL SUITABLE FOR SOME CONDITIONS / N - NOT RESISTANT

Chemical	23°C (73°F)	60°C (140°F)
Bromine, gas, 25%	R	R
Bromobenzene	N	N
Bromotoluene	N	N
Butadiene	R	R
Butane	R	R
Butynediol	R	N
Butyl acetate	N	N
Butyl stearate	R	N
Butyl phenol	R	N
Butylene, liquid	R	R
Butyric acid	R	N

C

Cadmium Cyanide	R	R
Calcium salts	R	R
except Calcium bisulde	R	R
Calcium hypochlorite, 30%	R	R
Calcium hydroxide	R	R
Calcium Nitrate	R	R
Calcium Oxide	R	R
Calcium Sulfate	R	R
Camphor	R	N
Cane sugar liquors	R	R
Carbon disulfide	N	N
Carbon dioxide	R	R
Carbon dioxide, aq	R	R
Carbon monoxide	R	R
Carbitol	R	N
Carbon tetrachloride	R	N
Carbonic Acid	R	R
Castor oil	R	R
Caustic potash (potassium hydroxide), 50%	R	R
Caustic soda (sodium hydroxide), <40%	R	R
Cellosolve	R	N
Cellosolve acetate	R	N
Chloral hydrate	R	R
Chloramine, dilute	R	N
Chloric acid, 20%	R	R

Chemical	23°C (73°F)	60°C (140°F)
Chlorine, gas, dry	C	N
Chlorine, gas, wet	N	N
Chlorine, liquid	N	N
Chlorine water	R	R
Chloroacetic acid, 50%	R	R
Chloroacetyl Chloride	R	N
Chlorobenzene	N	N
Chlorobenzyl chloride	N	N
Chloroform	N	N
Chloropicrin	N	N
Chlorosulfonic acid	R	N
Chromic acid, 10%	R	R
Chromic acid, 30%	R	R
Chromic acid, 40%	R	C
Chloroacetic acid, 50%	N	N
Chromium potassium sulfate	R	N
Citric acid	R	R
Coconut oil	R	R
Coffee	R	R
Coke oven gas	R	R
Copper acetate	R	N
Copper salts, aq	R	R
Corn oil	R	R
Corn syrup	R	R
Cottonseed oil	R	R
Creosote	N	R
Cresol, 90%	N	N
Cresylic acid, 50%	R	R
Croton aldehyde	N	N
Crude oil, sour	R	R
Cyclohexane	N	N
Cyclohexanol	N	N
Cyclohexanone	N	N

D

Detergents, aq	R	R
Dextrin	R	R
Dextrose	R	R

R - GENERALLY RESISTANT / C - LESS RESISTANT THAN R BUT STILL SUITABLE FOR SOME CONDITIONS / N - NOT RESISTANT

Chemical	23°C (73°F)	60°C (140°F)
Dibutoxyethyl phthalate	N	N
Diesel fuels	R	R
Diethylamine	N	N
Diethyl Ether	R	N
Disodium phosphate	R	R
Diglycolic acid	R	R
Dioxane -1,4	N	N
Dimethylamine	R	R
Dimethyl formamide	N	N
Dibutyl phthalate	N	N
Dibutyl sebacate	R	N
Dichlorobenzene	N	N
Dichloroethylene	N	N

E

Ether	N	N
Ethyl ether	N	N
Ethyl halides	N	N
Ethylene halides	N	N
Ethylene glycol	R	R
Ethylene oxide	N	N

F

Fatty acids	R	R
Ferric salts	R	R
Fish Oil	R	R
Fluorine, dry gas	R	N
Fluorine, wet gas	R	N
Fluoboric acid	R	R
Fluosilicic acid, 50%	R	R
Formaldehyde	R	R
Formic acid	R	N
Freon - F11, F12, F113, F114	R	R
Freon - F21, F22	R	N
Fructose	R	R
Furfural	N	N

G

Gallic acid	R	R
Gas, coal, manufactured	N	N
Gas, natural, methane	R	R

Chemical	23°C (73°F)	60°C (140°F)
Gasolines	C	C
Gelatin	R	R
Glucose	R	R
Glue, animal	R	R
Glycerine (glycerol)	R	R
Glycolic acid	R	R
Glycols	R	R
Grape Sugar	R	R
Green liquor, paper	R	R

H

Heptane	R	R
Hexane	R	N
Hexanol	R	R
Hydraulic Oil	R	N
Hydrobromic acid, 20%	R	R
Hydrochloric acid	R	R
Hydrofluoric acid, 30%	R	N
Hydrofluoric acid, 50%	R	N
Hydrofluoric acid, 100%	N	N
Hydrofluosilic acid	R	R
Hydrocyanic acid	R	R
Hydrogen	R	R
Hydrogen cyanide	R	R
Hydrogen fluoride	N	N
Hydrogen phosphide	R	R
Hydrogen peroxide, 50%	R	R
Hydrogen peroxide, 100%	R	R
Hydrogen sulfide, aq	R	R
Hydrogen sulfide, dry	R	R
Hydroquinone	R	R
Hydroxylamine sulfate	R	R
Hydrazine	N	N
Hypochlorous acid	R	R

I

Iodine, aq, 10%	N	N
-----------------	---	---

J

Jet fuels, JP-4 and JP-5	C	C
--------------------------	---	---

R - GENERALLY RESISTANT / C - LESS RESISTANT THAN R BUT STILL SUITABLE FOR SOME CONDITIONS / N - NOT RESISTANT

K

Chemical	23°C (73°F)	60°C (140°F)
Kerosene	R	R
Ketones	N	N
Ketchup	R	N
Kraft paper liquor	R	R

L

Lactic acid, 25%	R	R
Lactic acid, 80%	N	N
Lard oil	R	N
Lauric acid	R	R
Lauryl acetate	R	R
Lauryl chloride	N	N
Lead salts	R	N
Lime sulfur	R	R
Linoleic acid	R	R
Linoleic oil	N	N
Linseed oil	R	N
Liqueurs	R	R
Lithium salts	R	R

M

Magnesium salts	R	R
Maleic acid	R	R
Malic acid	R	R
Manganese sulfate	R	R
Mercuric salts	R	R
Mercury	R	R
Methane	R	R
Methoxyethyl oleate	R	N
Methyl acetate	N	N
Methyl amine	N	N
Methyl bromide	N	N
Methyl cellosolve	N	N
Methyl chloride	N	N
Methyl chloroform	N	N
Methyl ethyl ketone	N	N
Methyl isobutyl carbinol	N	N
Methyl isopropyl ketone	N	N

Chemical	23°C (73°F)	60°C (140°F)
Methyl methacrylate	R	N
Methyl sulfate	R	N
Methyl sulfuric acid	R	R
Methylene bromide	N	N
Methylene chloride	N	N
Methylene iodide	N	N
Milk	R	R
Mineral oil	R	R
Molasses	R	R
Monochloroacetic acid	R	R
Monochlorobenzene	N	N
Monoethanolamine	N	N
Motor oil	R	R

N

Naptha	R	R
Naphthalene	N	N
Natural Gas	R	R
Nickel acetate	R	N
Nickel salts	R	R
Nicotine	R	R
Nicotinic acid	R	R
Nitric acid, 0 to 40%	R	R
Nitric acid, 50%	R	C
Nitric acid, 100%	N	N
Nitrobenzene	N	N
Nitroglycerine	N	N
Nitrous acid, 10%	R	R
Nitrous oxide, gas	R	N
Nitroglycol	N	N

O

Oleic acid	R	R
Oleum	N	N
Olive oil	R	R
Oxalic acid	R	R
Oxygen, gas	R	R
Ozone, gas	R	R

R - GENERALLY RESISTANT / C - LESS RESISTANT THAN R BUT STILL SUITABLE FOR SOME CONDITIONS / N - NOT RESISTANT

Chemical	23°C (73°F)	60°C (140°F)
Palmitic acid, 10%	R	R
Palmitic acid, 70%	R	N
Paraffin	R	R
Pentane	C	C
Peracetic acid, 40%	R	N
Perchloric acid, 15%	R	N
Perchloric acid, 70%	R	N
Perchloroethylene	R	N
Perphosphate	R	N
Phenol	R	N
Phenylhydrazine	N	N
Phosphoric anhydride	R	N
Phosphoric acid	R	R
Phosphorus pentoxide	R	N
Phosphorous trichloride	N	N
Photographic chemicals, aq	R	R
Phthalic acid	N	N
Plating solutions, metal	R	R
Potash	R	R
Potassium amyl xanthate	R	N
Potassium salts, aq	R	R
except Potassium iodide	R	N
Potassium permanganate, 10%	R	R
Potassium permanganate, 25	N	N
Propane	R	R
Propylene dichloride	N	N
Propylene oxide	N	N
Pyridine	N	N
Pyrogallol acid	R	N

R

Rayon coagulating bath	R	R
------------------------	---	---

S

Salicylic acid	R	R
Salicylaldehyde	N	N
Selenic acid, aq.	R	R
Silicic acid	R	R
Silicone oil	R	N

Silver salts	R	R
Soaps	R	R
Sodium salts, aq	R	R
except Sodium chlorite	N	N
except Sodium chlorate	R	N
except Sodium hypochlorite	R	N
Stannic chloride	R	R
Stannous chloride	R	R
Starchy	R	R
Stearic acid	R	R
Stoddard solvent	N	N
Succinic acid	R	R
Sulfamic acid	N	N
Sulfate & Sulfite liquors	R	R
Sulfur	R	R
Sugars, aq	R	R
Sulfur dioxide, dry	R	R
Sulfur dioxide, wet	R	R
Sulfur trioxide, gas, dry	R	R
Sulfur acid, wet	R	N
Sulfuric acid, up to 80%	R	R
Sulfuric acid, 90 to 93%	R	N
Sulfuric acid, 94 to 100%	N	N
Sulfurous acid	R	R

T

Tall oil	R	R
Tannic acid	R	R
Tanning liquors	R	R
Tar	N	N
Tartaric acid	R	R
Terpineol	C	C
Tetrachloroethane	C	C
Toluene	N	N
Tomato juice	R	R
Transformer oil	R	R
Tributyl phosphate	N	N
Tributyl citrate	R	R
Trichloroacetic acid	R	R

R - GENERALLY RESISTANT / C - LESS RESISTANT THAN R BUT STILL SUITABLE FOR SOME CONDITIONS / N - NOT RESISTANT

Chemical	23°C (73°F)	60°C (140°F)
Trichloroethylene	R	N
Triethanolamine	R	N
Triethylamine	R	R
Trimethyl propane	R	N
Trisodium phosphate	R	R
Turpentine	R	R

U

Urea	R	R
Urine	R	R

V

Vaseline	N	N
Vegetable oils	R	R
Vinegar	R	R
Vinyl acetate	N	N

W

Water, deionized	R	R
Water, distilled	R	R
Water, salt	R	R
White Liquor	R	R
Whiskey	R	R
Wines	R	R

X

Xylene	N	N
--------	---	---

Z

Zinc salts	R	R
------------	---	---


R - GENERALLY RESISTANT / C - LESS RESISTANT THAN R BUT STILL SUITABLE FOR SOME CONDITIONS / N - NOT RESISTANT



BUILT FOR PURPOSE

FIELDS OF APPLICATIONS

Poddar's "Lead-Free" uPVC solvent weld plumbing system is engineered to deliver superior performance, reliability, and ease of installation. Designed to meet the needs of engineers and architects, Aqualife provides a complete plumbing solution for both residential and commercial applications. Available in sizes ranging from 15 mm (½") to 150 mm (6"), with Sch 40 and Sch 80 options, the system is built to handle a wide variety of pressure and flow requirements across multiple plumbing applications.

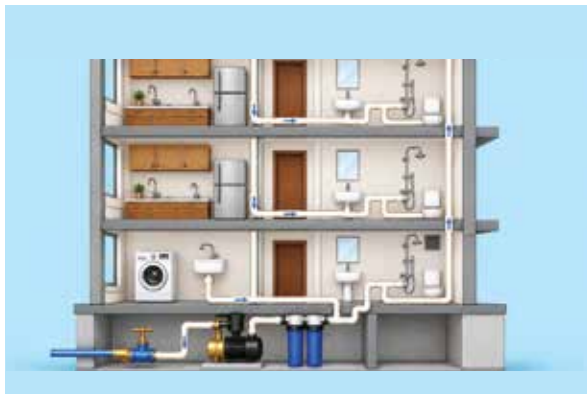

COLD WATER PLUMBING APPLICATION IN BUILDINGS

Reliable and leak-free cold water distribution for residential, commercial, and institutional buildings of all scales.



SEMI AGGRESSIVE/ CORROSIVE FLUID TRANSPORTATION

Capable of safely transporting mildly corrosive and semi-aggressive fluids across a range of industrial applications.



SWIMMING POOLS

Resistant to chlorine and pool chemicals, ensuring safe and durable water circulation in swimming pool systems.



SALT WATER LINES

Corrosion-resistant and built to last in coastal and marine environments where salt water exposure is constant.



DYE PLANTS, CHROME, ZINC PLATING AND TANNING PLANTS

Designed to withstand harsh industrial chemicals used in finishing and treatment processes without degrading over time.




SUGAR, PAPER AND DISTILLERY INDUSTRIES

Hygienic, durable, and chemical-resistant — ideal for fluid handling in food-grade and process industry environments.



COAL WASHING AND ASH HANDLING

Tough enough to manage abrasive slurries and ash-laden water in heavy-duty industrial settings.

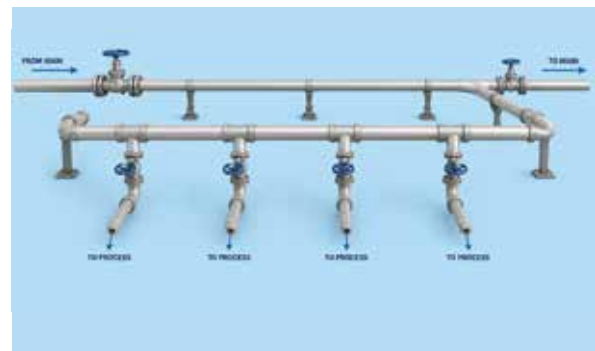

RING LINES/DOWN TAKE LINES

Delivers consistent pressure performance across ring main systems and vertical down take lines in large-scale installations.



WATER DISTRIBUTION MAINS

Engineered to meet the demands of main water distribution networks, ensuring reliable flow across extensive installations.



INDUSTRIAL PROCESS LINES

Built to handle a wide range of industrial fluids with excellent chemical resistance and consistent pressure performance.



BUILT FOR PURPOSE

PROPERTIES OF uPVC PIPE

GENERAL

An overview of the key physical properties of uPVC pipes, including material classification, temperature resistance, and surface characteristics that influence everyday performance.

Physical properties of uPVC pipe	Value	Test Method
Cell classification	12454	ASTMD1784
Maximum service temperature	140°F/60°C	-
Colour	White	-
Water Absorption % increase 24 hrs @ 25°C	0.05	ASTM D570
Rockwell hardness	110-120	ASTM D785
Poisson's Ratio @ 73°F	0.410	-
Hazen Williams factor	C=150	-

MECHANICAL

These specifications highlight the mechanical strength of uPVC pipes, including their resistance to tension, compression, impact, and bending under demanding conditions.

Physical properties of uPVC pipe	Value	Test Method
Specific gravity	1.45 / 1.47	ASTM D792
Tensile strength, psi @ 73°F	7,450	ASTM D638
Modulus of elasticity, psi @ 73°F (tensile modulus)	420,000	ASTM D638
Flexural strength, psi @ 73°F	14,450	ASTM D790
Compressive strength, psi @ 73°F	9,600	ASTM D695
Izod impact, ft-lb./in @ 73°F	0.75	ASTM D256

THERMAL

An overview of the thermal properties of uPVC pipes, including expansion, heat conductivity, and deflection limits that define safe and reliable operating conditions.

Physical properties of uPVC pipe	Value	Test Method
Coefficient of linear expansion (in/in/°F)	1.45 / 1.47	ASTM D792
Coefficient of thermal conductivity (BTU/hr/ft ² /°F/in)	7,450	ASTM D638
Heat deflection temperature °F @ 264 psi	420,000	ASTM D638
Specific heat, Cal/g/°C	14,450	ASTM D790

ELECTRICAL

Highlights the electrical insulation properties of uPVC pipes, showcasing their high resistance and dependable dielectric performance across essential parameters.

Physical properties of uPVC pipe	Value	Test Method
Dielectric strength, V/mi	ASTM D149	ASTM D696
Dielectric Constant, 60Hz, 30°F	ASTM D150	ASTM C177
Volume resistivity, Ω /cm @ 95°C, ohms/cm	1.2 x 10 ¹²	ASTM D257

STANDARDS FOR PIPES & FITTINGS

A guide to the ASTM standards applicable to each pipe and fitting type, ensuring compliance with internationally recognised quality and performance requirements.

Physical properties of uPVC pipe	Value	Test Method
Sch 40 Pipe	ASTM D 1785	½" - 6"
Sch 80 Pipe	ASTM D 1785	½" - 6"
Sch 40 Fitting	ASTM D 2466	2½" - 6"
Sch 80 Fitting	ASTM D 2467	½"- 4"

TEMPERATURE DE-RATING GUIDE

Shows how the pressure rating of uPVC pipes changes with increasing temperatures, helping define safe and reliable operating conditions.

Fahrenheit (oF)	Centigrade (oC)	Test Method
73	23	1.00
80	27	0.88
90	32	0.75
100	38	0.62
110	43	0.51
120	49	0.40
130	54	0.31
140	60	0.22

FLAMMABILITY

Explains the fire performance of uPVC pipes, highlighting their self-extinguishing properties and low flame-spread characteristics.

Fahrenheit (oF)	Centigrade (oC)	Test Method
Flammability rating	V-0	UL94
Flammability index	<10	-
Flame spread	0-25	ULC S102.2
Flash ignition temperature	730°F	ASTM D257
Average time of burning (sec.)	<5	ASTM D635
Average extent of burning	<10(mm)	ASTM D635
Burning rate (in/min)	Self Extinguishing	ASTM D635
Softening starts (approx)	250°F/121oC	-
Material becomes viscous	350°F/176oC	-
Material carbonizes	425°F/218oC	-
Smoke generation	80-225	ULC S102.2

DIMENSION AND WATER PRESSURE RATING OF uPVC PIPES AND FITTINGS

Nominal Pipe Size (in)	Outside Diameter (mm)	Average	Maximum out of roundness	Wall Thickness			
				SCH 40		SCH 80	
				Minimum	Tolerance	Minimum	Tolerance
½	21.34	± 0.10	0.71	1.8	2.2	3.2	3.8
¾	26.67	± 0.10	0.51	1.8	2.2	3.2	3.8
1	33.4	± 0.13	0.51	1.8	2.2	3.2	3.8
1¼	42.16	± 0.13	0.61	1.9	2.3	3.2	3.8
1½	48.26	± 0.13	0.61	2.2	2.7	3.2	3.8
2	60.32	± 0.15	0.61	3.2	3.8	4.0	4.6
2½	73.02	± 0.18	0.76	3.2	3.8	4.0	4.6
3	88.9	± 0.20	0.76	3.2	3.8	4.0	4.6
4	114.3	± 0.23	0.76	3.2	3.8	4.0	4.6
6	168.28	± 0.28	0.78	3.2	3.8	4.0	4.6


PRESSURE RATING - uPVC PIPES SCHEDULE 40

Normal (in)	Size (mm)	Average Outer Diameter	Min. Wall thickness (mm)	Max. work pressure rating (kg/cm ²) at 23°C	Burst Pressure (kg/cm ²)
½	15	21.34	2.77	42.22	134.30
¾	20	26.67	2.87	33.75	108.29
1	25	33.40	3.38	31.61	101.26
1¼	32	42.16	3.56	26.00	83.00
1½	40	48.26	3.68	23.25	74.54
2	50	60.32	3.91	19.68	62.61
2½	65	73.02	5.16	21.11	68.22
3	80	88.90	5.49	18.25	59.04
4	100	114.30	6.02	15.50	49.97
6	150	168.28	7.11	12.64	39.36

PRESSURE RATING - uPVC PIPES SCHEDULE 80

Normal (in)	Size (mm)	Average Outer Diameter	Min. Wall thickness (mm)	Max. work pressure rating (kg/cm ²) at 23°C	Burst Pressure (kg/cm ²)
½	15	21.34	2.77	42.22	134.30
¾	20	26.67	2.87	33.75	108.29
1	25	33.40	3.38	31.61	101.26
1¼	32	42.16	3.56	26.00	83.00
1½	40	48.26	3.68	23.25	74.54
2	50	60.32	3.91	19.68	62.61
2½	65	73.02	5.16	21.11	68.22
3	80	88.90	5.49	18.25	59.04
4	100	114.30	6.02	15.50	49.97
6	150	168.28	7.11	12.64	39.36

TAPERED SOCKETS FOR UPVC PIPE FITTINGS

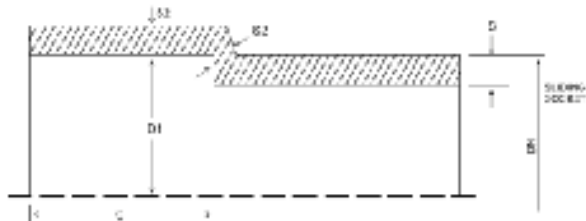

TAPERED SOCKETED DIMENSION FOR UPVC PIPE FITTINGS, SCHEDULE 40 (AS PER ASTM D2466)

Nominal Size (in)	Socket Entrance Diameter (A)		Socket Entrance Diameter (B)		Socket Length, inch (mm)	Inside Diameter, inch (mm)	Wall Thickness, inch (mm)	
	Diameter	Tolerance on Diameter, inch (mm)	Diameter	Tolerance on Diameter, inch (mm)			Middle if the Socket "E"	Beyond the Socket "F"
½	0.848 (21.54)	±0.004 (±0.10)	0.836 (21.23)	±0.004 (±0.10)	0.688 (17.48)	0.578 (14.68)	0.109 (2.77)	0.136 (3.45)
¾	1.058 (26.87)	±0.004 (±0.10)	1.046 (26.57)	±0.004 (±0.10)	0.719 (18.26)	0.820 (20.83)	0.113 (2.87)	0.141 (3.58)
1	1.325 (33.65)	±0.005 (±0.13)	1.310 (33.27)	±0.005 (±0.13)	0.875 (22.23)	1.044 (26.52)	0.133 (3.38)	0.166 (4.22)
1 ¼	1.670 (42.42)	±0.005 (±0.13)	1.655 (42.04)	±0.005 (±0.13)	0.938 (23.83)	1.375 (34.93)	0.140 (3.56)	0.175 (4.45)
1 ½	1.912 (48.56)	±0.006 (±0.15)	1.894 (48.11)	±0.006 (±0.15)	1.094 (27.79)	1.604 (40.74)	0.145 (3.68)	0.181 (4.60)
2	2.387 (60.63)	±0.006 (±0.15)	2.369 (60.17)	±0.006 (±0.15)	1.156 (29.36)	2.061 (52.35)	0.154 (3.91)	0.193 (4.90)
2 ½	2.889 (73.38)	±0.007 (±0.18)	2.868 (72.85)	±0.007 (±0.18)	1.750 (44.45)	2.462 (65.53)	0.203 (5.16)	0.254 (6.45)
3	3.516 (89.31)	±0.008 (±0.20)	3.492 (88.70)	±0.008 (±0.20)	1.875 (47.625)	3.060 (77.72)	0.216 (5.49)	0.270 (6.86)
4	4.518 (114.76)	±0.009 (±0.23)	4.491 (114.07)	±0.009 (±0.23)	2.000 (50.80)	4.017 (102.03)	0.237 (6.02)	0.296 (7.52)
6	6.647 (168.83)	±0.011 (0.28)	6.614 (168.00)	±0.011 (0.28)	3.00 (76.20)	6.054 (153.77)	0.280 (7.11)	0.350 (8.89)

TAPERED SOCKETED DIMENSION FOR UPVC PIPE FITTINGS, SCHEDULE 80 (AS PER ASTM D2467)

Nominal Size (in)	Socket Entrance Diameter (A)		Socket Entrance Diameter (B)		Socket Length, inch (mm)	Inside Diameter, inch (mm)	Wall Thickness, inch (mm)	
	Diameter	Tolerance on Diameter, in (mm)	Diameter	Tolerance on Diameter, inch (mm)			Middle if the Socket "E"	Beyond the Socket "F"
½	0.852 (21.64)	±0.004 (±0.10)	0.840 (21.34)	±0.004 (±0.10)	0.875 (22.22)	0.542 (13.77)	0.147 (3.73)	0.185 (4.70)
¾	1.062 (26.97)	±0.004 (±0.10)	1.050 (26.67)	±0.004 (±0.10)	1.000 (25.40)	0.738 (18.75)	0.154 (3.91)	0.195 (4.95)
1	1.330 (33.78)	±0.005 (±0.13)	1.315 (33.40)	±0.005 (±0.13)	1.250 (31.75)	0.952 (24.18)	0.179 (4.55)	0.225 (5.72)
1 ¼	1.675 (42.55)	±0.005 (±0.13)	1.660 (42.18)	±0.005 (±0.13)	1.375 (34.93)	1.273 (32.33)	0.191 (4.85)	0.240 (6.10)
1 ½	1.918 (48.72)	±0.006 (±0.15)	1.900 (48.26)	±0.006 (±0.15)	1.500 (38.10)	1.494 (37.95)	0.200 (5.08)	0.250 (6.99)
2	2.393 (60.78)	±0.006 (±0.15)	2.375 (60.325)	±0.006 (±0.15)	1.750 (44.45)	1.933 (49.10)	0.218 (5.54)	0.275 (6.99)
2 ½	2.896 (73.56)	±0.007 (±0.18)	2.875 (73.03)	±0.007 (±0.18)	1.875 (47.63)	2.316 (58.83)	0.276 (7.01)	0.345 (8.75)
3	3.524 (89.51)	±0.008 (±0.20)	3.500 (88.90)	±0.008 (±0.20)	1.875 (47.625)	2.892 (73.48)	0.300 (7.62)	0.375 (9.525)
4	4.527 (114.99)	±0.009 (±0.23)	4.500 (114.301)	±0.009 (±0.23)	2.250 (57.15)	3.817 (96.951)	0.337 (8.56)	0.420 (10.67)



MANUFACTURING STANDARDS

QUALITY CONTROL PROCEDURES

The pipes and fittings manufactured at Poddar, follow a stringent quality control process before being rolled out to the market, in order to supply a defect free system to its users.

The various quality control checks regularly being done at Poddar follow the highest specifications of BIS (India) and ASTM (USA) as given below.

PIPES

FLATTENING TEST

Samples are compressed until opposite walls meet without cracking, demonstrating proper extrusion quality and consistent manufacturing standards.

DROP IMPACT TEST

A weight is dropped onto the pipe at 0°C to verify impact resistance, with no cracks or failures expected after testing.

HEAT REVERSION TEST

Measures the change in pipe length after heating and cooling, indicating the level of residual stress from the manufacturing process.

TENSILE STRENGTH

Indicates the highest tensile stress a pipe can endure before failure under pulling or stretching forces.

FITTINGS

STRESS RELIEF TEST

Tests the fitting for internal stress by heating it to 150°C in a circulating air oven. No blisters, weld-line separation, or cracks should appear, ensuring every fitting is free from defects that could lead to failure under pressure.

SYSTEMS

HYDROSTATIC PRESSURE TEST

The system is tested at 1.5 times its working pressure for up to 15 minutes without any leakage. This confirms the integrity of the complete piping system, ensuring every joint and fitting can safely withstand operating pressures before being placed into service.

PIPES AND FITTINGS

VISUAL APPEARANCE

Every pipe and fitting is inspected for consistent colour and carefully checked for surface defects such as scratches, burn marks, and black spots before dispatch.

DIMENSIONS

All pipes and fittings are verified for standard wall thickness, socket diameter, and socket depth to ensure accurate dimensions and secure, leak-free installation.

DENSITY

Density is checked against approved material specifications to verify the correct raw material composition, ensuring the strength, durability, and reliability of every product.

BURST PRESSURE

The pipe must withstand a burst pressure exceeding three times its rated working pressure, ensuring reliable performance against sudden pressure surges without cracking or bursting.

OPACITY

Light transmission through the pipe wall must remain below 0.2%, preventing algae growth and maintaining clean, hygienic water flow.



CARE BEFORE INSTALLATION

GUIDELINES FOR HANDLING & STORAGE

Every pipe, fitting, and solvent cement product requires proper care during handling and storage to ensure it reaches installation in perfect condition and performs as intended throughout its service life.

PROPER HANDLING OF PIPES

INSPECT ON ARRIVAL

Upon receiving your order, thoroughly inspect every pipe for any signs of damage that may have occurred during transit, including shifts in load or mishandling during transportation. Pay close attention to the ends of each pipe and examine them carefully for visible cracks, chips, or any structural damage before accepting the delivery or proceeding with installation.

HANDLE WITH CARE

Always handle pipes with the care and attention they deserve. Never throw, drop, or drag pipes from a truck bed or any elevated surface, as this can cause invisible stress fractures that compromise performance. Keep pipes away from sharp objects and edges at all times during movement, as any contact with such surfaces can result in damage that affects the long-term integrity of the pipe.

STORAGE OF PIPES

CHOOSE THE RIGHT LOCATION

Pipes should ideally be stored indoors in a covered and protected environment. When indoor storage is not available or practical, ensure that pipes are stacked no higher than the recommended limit and protected from the elements. Always store pipes on a level, dry surface and shield them from direct sunlight to minimise the effects of prolonged UV exposure on the material.

STACK AND SUPPORT CORRECTLY

When stacking pipes of the same diameter but belonging to different pressure classes, always position the thicker-walled pipes at the bottom of the stack to maintain structural stability. If pipes are being stored on racks, ensure that the spacing between supporting points does not exceed 3 feet to prevent bowing or deformation of the pipe over time.

SAFE HANDLING OF SOLVENT CEMENT

SEAL AFTER EVERY USE

After each and every application of solvent cement onto a pipe or fitting, immediately replace the lid on the container and tighten it securely to prevent evaporation and the unintended escape of solvent fumes into the surrounding environment.

ENSURE ADEQUATE VENTILATION

Avoid inhaling solvent vapours for any extended period of time. Whenever pipes and fittings are being joined in enclosed or confined areas, it is essential to ensure that adequate ventilation is maintained throughout the entire jointing process.

PROTECT EYES AND SKIN

Prevent direct contact of solvent cement with the eyes and skin at all times. If eye contact does occur, immediately flush the affected area thoroughly with a generous amount of clean water for a minimum of 15 minutes and seek prompt medical attention.

STORE CONTAINERS PROPERLY

All containers of solvent cement, primers, and cleaners must be kept tightly sealed and closed at all times except during active use. Any rags or applicator materials that have been used with solvents must be disposed of responsibly in a designated outdoor waste bin.

AWAY FROM IGNITION SOURCES

Solvent cement, primers, and cleaning agents must be stored and used well away from all potential sources of ignition, including open flames, heat sources, sparks, and any equipment that could trigger combustion in the presence of flammable vapours.



EASY & 100% LEAKPROOF INSTALLATION

INSTALLATION GUIDE

STEP 1: CUTTING

Measure the required pipe length and mark it clearly using a felt tip pen. Verify size compatibility before proceeding. Cut using a plywood saw, ratchet cutter, or wheel cutter, always at 90° to ensure an optimal bonding area. Inspect pipe ends thoroughly before jointing. If any crack or splintering is found, cut a minimum of 25 mm beyond the visible damage before proceeding.



STEP 2: DEBURRING / BEVELING

Burrs on or inside the pipe end can obstruct flow and prevent proper contact between pipe and fitting socket during assembly. Remove them carefully from both inner and outer surfaces using a 15 mm half-round file, pen knife, or deburring tool. Applying a slight bevel to the pipe end will ease its entry into the fitting socket during assembly.



STEP 3: FITTING PREPARATION

Wipe all dirt, dust, and moisture thoroughly from the fitting sockets and pipe end using a clean, dry rag to ensure a clean bonding surface. Perform a dry fit to confirm the pipe enters fully and reaches the bottom of the socket without obstruction. Once confirmed, mark the pipe clearly at the socket entry point using a felt tip pen for accurate reference during final assembly.



STEP 4: ONE STEP SOLVENT CEMENT PROCEDURE

Use only genuine Poddar uPVC Solvent Cement conforming to ASTM D-2564 / IS 14182 for a reliable solvent weld joint. Apply a smooth, even coat uniformly across the pipe end and inside the fitting socket. Never use thickened or lumpy cement. It must flow freely with a consistency similar to syrup or paint for proper surface penetration.



STEP 5: ASSEMBLY

Immediately after applying solvent cement, insert the pipe firmly into the fitting socket. Rotate the pipe a quarter to half turn while inserting to distribute the cement evenly across the joint surface. Hold the assembly firmly in position for a minimum of 3 seconds to allow the joint to begin setting and prevent push-out.





TEMPERATURE AND TIME GUIDELINES

SOLVENT CEMENT SET & CURE TIMES

AVERAGE INITIAL SET SCHEDULE FOR uPVC SOLVENT CEMENT

Temperature Range	Pipe Sizes ½"-1¼" (15 mm – 32 mm)	Pipe Sizes 1½"-2" (40 mm – 50 mm)	Pipe Sizes 2½"-6" (65 mm – 150 mm)
60° – 100°F / 16° – 38°C	2 minutes	5 minutes	30 minutes
40° – 60°F / 5° – 16°C	5 minutes	10 minutes	2 hours
0° – 40°F / -18° – 5°	10 minutes	15 minutes	12 hours

Note - Initial set schedule is the necessary time to allow before the joint can be carefully handled.

In damp or humid weather allow 50% more set time.

AVERAGE JOINT CURE SCHEDULE FOR uPVC SOLVENT CEMENT

Relative Humidity 60% or Less	Pipe Sizes ½"-1¼" (15 mm – 32 mm)		Pipe Sizes 1½"-2" (40 mm – 50 mm)		Pipe Sizes 2½"-6" (65 mm – 150 mm)	
Temperature range during assembly and cure periods	psi (Bar)		psi (Bar)		psi (Bar)	
	up to 160 (up to 11)	160 to 370 (11 to 26)	up to 160 (up to 11)	160 to 315 (11 to 22)	up to 160 (up to 11)	160 to 315 (11 to 22)
60° – 100°F / 16° – 38°C	15 minutes	6 hours	30 minutes	12 hours	1 - ½ hours	24 hours
40° – 60°F / 5° – 16°C	20 minutes	12 hours	45 minutes	24 hours	4 hours	48 hours
0° – 40°F / -18° – 5°	30 minutes	48 hours	1 hour	96 hours	72 hours	8 days

Note - Joint cure schedule is the necessary time to allow before pressurizing system.

In damp or humid weather allow 50% more cure time.



These figures are estimates based on testing done under laboratory conditions. Although this information is widely published across the industry, these charts should be used as a general reference only. Field working conditions can vary significantly and will increase set and cure times.



ESSENTIAL TIPS AND INSTALLATION WARNINGS

1. Always dry-fit all joints before applying solvent cement to ensure a proper, secure interference fit between all pipe and fitting components.
2. Any fitting that does not achieve a proper interference fit during dry fitting must be rejected and replaced before installation.
3. Do not apply solvent cement to joints that are excessively loose or overly tight, as an improper fit can lead to weak or failed connections.
4. Always use the correct bevelling tools to properly prepare pipe ends before applying solvent cement, ensuring a strong and reliable bond.
5. Do not apply solvent cement before bevelling all pipe ends, as unbevelled edges can compromise joint strength and sealing performance.
6. Use only One-Step solvent cement for joining all pipes, fittings, and accessories to ensure compatibility and create strong, reliable, leak-proof connections throughout the system.
7. Do not use primer with One-Step solvent cement, as it is unnecessary and incompatible with this jointing system.
8. Do not use any solvent cement other than the recommended One-Step product when joining Poddar Agri pipes, fittings, and accessories, as it may cause joint failure.
9. Carefully read and follow all instructions supplied with the solvent cement before installation to ensure correct application and reliable joint performance.
10. Poddar fully supports and endorses all safety and protective measures recommended by relevant government agencies and regulatory bodies when installing Poddar Agri pipes on site.
11. Always maintain proper ventilation throughout the work area while applying solvent cement during the installation process.
12. Avoid direct contact of solvent cement with the skin and eyes during handling and application to prevent irritation and potential health hazards.
13. If solvent cement comes into contact with the skin or eyes, rinse the affected area immediately and thoroughly with clean water to minimise exposure.
14. Always follow the manufacturer's recommended safety guidelines when cutting pipes or using flame, heat-producing, or power tools near the installation area.
15. Keep open flames, soldering equipment, and all ignition sources away from solvent cement joints during and after installation.



TECHNICAL DETAILS

FITTINGS DIMENSIONS

TEE

Size	ID	OD	WT	SL	L
½"	16.08	21.26	2.59	12.70	32.0
¾"	22.45	27.63	2.59	17.78	42.3
1"	28.83	33.56	2.59	22.86	48.0
1¼"	35.20	41.56	3.18	27.94	54.5
1½"	41.66	49.18	3.76	33.02	61.5
2"	54.38	64.18	4.90	43.18	75.0

REDUCING MALE ADAPTER PLASTIC THREADED - MAPT

¾ x ½"	22.45	27.63	2.59	17.78	41.6
1 x ¾"	28.83	33.56	2.59	22.86	44.0

ELBOW 45

	ID	OD	WT	SL	L
	16.08	21.26	2.59	12.70	32.0
	22.45	27.63	2.59	17.78	42.3
	28.83	33.56	2.59	22.86	48.0
	35.20	41.56	3.18	27.94	54.5
	41.66	49.18	3.76	33.02	61.5
	54.38	64.18	4.90	43.18	75.0

REDUCING MALE ADAPTER PLASTIC THREADED - MAPT

	22.45	27.63	2.59	17.78	41.6
	28.83	33.56	2.59	22.86	44.0

BEND

	ID	OD	WT	SL	L
	16.08	21.26	2.59	12.70	32.0
	22.45	27.63	2.59	17.78	42.3
	28.83	33.56	2.59	22.86	48.0
	35.20	41.56	3.18	27.94	54.5
	41.66	49.18	3.76	33.02	61.5
	54.38	64.18	4.90	43.18	75.0

REDUCING MALE ADAPTER PLASTIC THREADED - MAPT

	22.45	27.63	2.59	17.78	41.6
	28.83	33.56	2.59	22.86	44.0


END CAP

	ID	OD	WT	SL	L
	16.08	21.26	2.59	12.70	32.0
	22.45	27.63	2.59	17.78	42.3
	28.83	33.56	2.59	22.86	48.0
	35.20	41.56	3.18	27.94	54.5
	41.66	49.18	3.76	33.02	61.5
	54.38	64.18	4.90	43.18	75.0

REDUCING MALE ADAPTER PLASTIC THREADED - MAPT

	22.45	27.63	2.59	17.78	41.6
	28.83	33.56	2.59	22.86	44.0

MALE ADAPTOR PLASTIC THREADED- MAPT (SCH 80)



Size	ID	OD	WT	SL	L
½	21.64	29.1	3.73	22.23	42
¾	26.97	34.79	3.91	25.4	48
1	33.78	42.88	4.55	28.58	56
1¼	42.55	52.25	4.85	31.75	58
1½	48.72	58.88	5.08	34.93	66
2	60.78	71.86	5.54	38.1	69
2½	73.56	87.58	7.01	44.45	72
3	89.5	113.74	7.62	47.63	76
4	114.99	132.11	8.56	57.15	81

REDUCING MALE ADAPTOR PLASTIC THREADED - MAPT (SCH 80)

Size	ID	OD	WT	SL	L
¾x ½	26.97	34.79	3.91	25.4	44

TANK NIPPLE (SCH 80)



Size	ID	L	H
½	21.64	41	67
¾	26.97	46	75
1	33.78	57	86
1¼	42.55	65	94
1½	48.72	71	102
2	60.78	82	104
2½			
3			
4	96.0	148	400

TANK NIPPLE (WITH ONE SIDE PIPE FITMENT)



Size	ID	SL	L	H
¾	26.97	25.4	46	75
1	33.78	28.58	56	86

CROSS TEE (SCH 80)



Size	ID	OD	WT	SL	L
½	21.64	29.1	3.73	22.23	70
¾	26.97	34.79	3.91	25.4	79
1	33.78	42.88	4.55	28.58	92

UNION (SCH 80)



Size	ID	OD	WT	SL	L	H
½	21.64	29.1	3.73	22.23	46	62
¾	26.97	34.79	3.91	25.4	53	65
1	33.78	42.88	4.55	28.58	69	68
1¼	42.55	52.25	4.85	31.75	71	85
1½	48.72	58.88	5.08	34.93	95	95
2	60.78	71.86	5.54	38.1	115	94

TEE (SCH 80)




Size	ID	OD	WT	SL	L	H
½	21.64	29.1	3.73	22.23	50	72
¾	26.97	34.79	3.91	25.4	57	79
1	33.78	42.88	4.55	28.58	67	93
1¼	42.55	52.25	4.85	31.75	80	108
1½	48.72	58.88	5.08	34.93	94	121
2	60.78	71.86	5.54	38.1	107	138
2½	73.56	87.58	7.01	44.45	130	174
3	89.5	113.74	7.62	47.63	140	200
4	114.99	132.11	8.56	57.15	188	245

TEE (SCH 40)

Size	ID	OD	WT	SL	L	H
2½	73.38	83.7	5.16	44.45	129	174
3	89.3	100.28	5.49	46.63	140	200
4	114.76	126.8	6.02	50.8	186	245
6	153.88	168.1	7.11	77.25	250	330

END CAP (SCH 80)




Size	ID	OD	WT	SL	L
½	21.64	29.1	3.73	22.23	28
¾	26.97	34.79	3.91	25.4	36
1	33.78	42.88	4.55	28.58	36
1¼	42.55	52.25	4.85	31.75	42
1½	48.72	58.88	5.08	34.93	45
2	60.78	71.86	5.54	38.1	54
2½	73.56	87.58	7.01	44.45	60
3	89.5	113.74	7.62	47.63	66
4	114.99	132.11	8.56	57.15	80

END CAP (SCH 40)

6	153.88	168.1	7.11	77.25	105
---	--------	-------	------	-------	-----

COUPLER (SCH 80)




Size	ID	OD	WT	SL	L
½	21.64	29.1	3.73	22.23	47
¾	26.97	34.79	3.91	25.4	54
1	33.78	42.88	4.55	28.58	60
1¼	42.55	52.25	4.85	31.75	67
1½	48.72	58.88	5.08	34.93	73
2	60.78	71.86	5.54	38.1	80
2½	73.56	87.58	7.01	44.45	96
3	89.5	113.74	7.62	47.63	102
4	114.99	132.11	8.56	57.15	121

COUPLER (SCH 40)


2½	73.38	87.58	5.16	44.45	96
3	89.3	100.28	5.49	46.63	102
4	114.76	126.8	6.02	50.8	121
6	153.88	168.1	7.11	77.25	160

FEMALE ADAPTOR PLASTIC THREADED – FAPT (SCH 80)




Size	ID	OD	WT	SL	L	H
½	21.64	29.1	3.73	22.23	29	40
¾	26.97	34.79	3.91	25.4	35	46
1	33.78	42.88	4.55	28.58	43	55
1¼	42.55	52.25	4.85	31.75	53	59
1½	48.72	58.88	5.08	34.93	60	67
2	60.78	71.86	5.54	38.1	72	71
2½	73.56	87.58	7.01	44.45	87	77
3	89.5	113.74	7.62	47.63	104	87
4	114.99	132.11	8.56	57.15	128	105

BALL VALVE (SCH 80)




Size	ID	SL	L	H	L
½	21.64	22.23	60	73	60
¾	26.97	25.4	78	75	78
1	33.78	28.58	99	104	99
1¼	42.55	31.75	115	115	115
1½	48.72	34.93	125	132	125
2	60.78	38.1	160	160	160

BALL VALVE HANDLE



Size	ID	SL
½	74	19
¾	84	21
1	108	30
1¼	116	34
1½	130	36
2	158	50

BALL VALVE with Brass Threaded (One Side)



Size	ID	SL	L	H
¾	26.97	25.4	78.5	75.2
1	33.78	28.58	99	104.4

BALL VALVE with Brass Threaded (Two Side)



Size	L	H
¾	78.5	75.2
1	99	104.4

ELBOW 90° (SCH 80)




Size	ID	OD	WT	SL	H
½	21.64	29.1	3.73	22.23	42
¾	26.97	34.79	3.91	25.4	58
1	33.78	42.88	4.55	28.58	66
1¼	42.55	52.25	4.85	31.75	80
1½	48.72	58.88	5.08	34.93	90
2	60.78	71.86	5.54	38.1	115
2½	73.56	87.58	7.01	44.45	132
3	89.5	113.74	7.62	47.63	150
4	114.99	132.11	8.56	57.15	182

ELBOW 90° (SCH 80)

2½	73.38	83.7	5.16	44.45	132
3	89.3	100.28	5.49	46.63	150
4	114.76	126.8	6.02	50.8	182
6	153.88	168.1	7.11	77.25	250

ELBOW 90° (SCH 80)

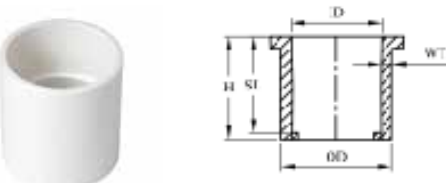

Size	ID-1	ID-2	OD	WT	SL	L
½	21.64	16.08	23.54	3.73	22.23	47
¾	26.97	22.45	30.27	3.91	25.4	54
1	33.78	28.38	37.48	4.55	28.58	60
1¼	42.55	35.2	44.9	4.85	31.75	67
1½	48.72	41.66	51.82	5.08	34.93	73
2	60.78	54.38	65.46	5.54	38.1	78

MALE ADAPTOR BRASS THREADED – MABT (SCH 80)



Size	ID	OD	WT	SL	L	H
½	21.64	29.1	3.73	22.23	35	59
¾	26.97	34.79	3.91	25.4	40	64
1	33.78	42.88	4.55	28.58	50	68
1¼	42.55	52.25	4.85	31.75	56	80
1½	48.72	58.88	5.08	34.93	62	83
2	60.78	71.86	5.54	38.1	75	95

REDUCING MALE ADAPTER BRASS THREADED – MABT (SCH 80)

¾ x ½	26.97	34.79	3.91	25.4	35	62
-------	-------	-------	------	------	----	----

FEMALE ADAPTOR BRASS THREADED – FABT (SCH 80)



Size	ID	OD	WT	SL	L	H
½	21.64	29.1	3.73	22.23	35	44
¾	26.97	34.79	3.91	25.4	40	47
1	33.78	42.88	4.55	28.58	50	55
1¼	42.55	52.25	4.85	31.75	60	61
1½	48.72	58.88	5.08	34.93	67	68
2	60.78	71.86	5.54	38.1	81	74

REDUCING FEMALE ADAPTOR BRASS THREADED – FABT (SCH 80)


¾ x ½	26.97	34.79	3.91	25.4	35	46
1 x ½	33.78	42.88	4.55	28.58	43	52

BRASS ELBOW 90° (SCH 80)



Size	ID	OD	WT	SL	L	H
½ x ½	21.64	29.1	3.73	22.23	46	55
¾ x ½	26.97	34.79	3.91	25.4	52	58
¾ x ¾	26.97	34.79	3.91	25.4	52	62
1 x ½	33.78	42.88	4.55	28.58	61	62
1 x ¾	33.78	42.88	4.55	28.58	56	67
1 x 1	33.78	42.88	4.55	28.58	61	74

BRASS TEE (SCH 80)



Size	ID	OD	WT	SL	L	H
1/2 x 1/2 x 1/2	21.64	29.1	3.73	22.23	46	76
3/4 x 3/4 x 1/2	26.97	34.79	3.91	25.4	52	85
1 x 1 x 1/2	33.78	42.88	4.55	28.58	59	94
1 x 1 x 3/4	33.78	42.88	4.55	28.58	59	94

BRASS TEE (SCH 80)




Size	ID	OD	SL	h	H
1/2	21.64	29.1	22.23	41.3	109
3/4	26.97	34.79	25.4	41.3	109
1	33.78	42.88	28.58	-	105

BRASS UNION MABT



SIZE	ID	OD	WT	SL	L	H
3/4	26.97	34.79	3.91	25.4	55.5	70.4
1	33.78	42.88	4.55	28.58	72.0	69

PLASTIC CLAMP




Size	WT	L	H
1/2	3.2	61	29
3/4	3.5	66	35
1	3.6	74	44
1 1/4	4	85	54
1 1/2	4.3	92	62
2	4.2	101	76

BRASS UNION FABT



SIZE	ID	OD	WT	SL	L	H
3/4	26.97	34.79	3.91	25.4	55.5	60
1	33.78	42.88	4.55	28.58	72.0	60

POWDER COATED METAL CLAMP



Size	WT	L	H
1/2	1.2	60	22
3/4	1.2	65	27
1	1.2	71	34
1 1/4	1.2	80	42
1 1/2	1.2	88	49
2	1.2	104	60

LONG CONCEALED VALVE




Size	ID	OD	SL	h	H
1/2	21.64	29.1	22.23	41.3	138
3/4	26.97	34.79	25.4	41.3	138
1	33.78	42.88	28.58	41.3	135

STEP OVER BEND (SCH 80)



Size	ID	WT	SL	H	L
1/2	21.64	3.73	22.23	42	150
3/4	26.97	3.91	25.4	50	190
1	33.78	4.55	28.58	70	268

FLANGE END CAP – OPEN (SCH 80)
(WITH RUBBER GASKET)




Size	ID	OD	WT	SL	L	H	U
1	33.78	42.88	4.55	28.58	115	32	4
1½	48.72	58.88	5.08	34.93	136	38	4
2	60.78	71.86	5.54	38.1	160	42	4
2½	73.56	87.58	7.01	44.45	176	51	4
3	89.5	113.74	7.62	47.63	188	55	4
4	114.99	132.11	8.56	57.15	225	68	8

FLANGE END CAP – OPEN (SCH 40)

6	153.88	168.1	7.11	77.25	278	87	8
---	--------	-------	------	-------	-----	----	---

FLANGE END CAP – CLOSED (SCH 80)
(WITH RUBBER GASKET)




Size	L	H	U
1	115	15	4
1½	136	18	4
2	160	19	4
2½	176	23	4
3	188	23	4
4	225	28	8

FLANGE END CAP – CLOSED (SCH 40)

6	278	28	8
---	-----	----	---

SHORT BEND (SCH 80)



Size	ID	H
½	21.64	140
¾	26.97	145
1	33.78	165
1¼	42.55	210
1½	48.72	210
2	60.78	250
3	89.5	260
4	114.25	510

SHORT BEND (SCH 40)


Size	ID	H
½	21.64	140
¾	26.97	145
1	33.78	165
1¼	42.55	210
1½	48.72	210
2	60.78	250
4	114.25	510

ELBOW 45° (SCH 80)



Size	ID	OD	WT	SL	L	H
½	21.64	29.1	3.73	22.23	45	59
¾	26.97	34.79	3.91	25.4	58	68
1	33.78	42.88	4.55	28.58	60	74
1¼	42.55	52.25	4.85	31.75	77	85
1½	48.72	58.88	5.08	34.93	83	88
2	60.78	71.86	5.54	38.1	98	115
2½	73.56	87.58	7.01	44.45	130	168
3	89.5	113.74	7.62	47.63	126	188
4	114.99	132.11	8.56	57.15	145	235

BUSHING - uPVC (SCH 80)



Size	ID-1	ID-2	SL	L	H
¾ x ½	26.97	21.64	22.23	34	28
1 x ½	33.78	21.64	22.23	43	32
1 x ¾	33.78	26.97	25.4	43	32
1¼ x ½	42.55	21.64	22.23	53	35
1¼ x ¾	42.55	26.97	25.4	53	35
1¼ x 1	42.55	33.78	28.58	53	35
1½ x ½	48.72	21.64	22.23	58	37
1½ x ¾	48.72	26.97	25.4	58	37
1½ x 1	48.72	33.78	28.58	58	37
1½ x 1¼	48.72	42.55	31.75	58	37
1½ x 1½	48.72	48.72	22.23	58	37
2 x ¾	60.78	26.97	25.4	72	43
2 x 1	60.78	33.78	28.58	72	43
2 x 1¼	60.78	42.55	31.75	72	43
2 x 1½	60.78	48.72	34.93	72	43
2½ x 2 (CTS)	73.56	60.78	38.1	80	56
2½ x 2	73.56	60.78	38.1	80	56
3 x 2 (CTS)	89.5	60.78	38.1	98	56

3 x 2½	89.5	73.56	44.45	98	56
4 x 2 (CTS)	114.99	60.78	38.1	123	66
4 x 2	114.99	60.78	38.1	123	66
4 x 2½	114.99	73.56	44.45	123	66
4 x 3	114.99	89.5	47.63	123	66

BUSHING - uPVC (SCH 40)

6 x 3	168.10	89.31	47.63	170	85
6 x 4	168.10	114.76	50.8	170	85

SINGLE STEP uPVC AQUALIFE SOLVENT CEMENT - BLUE COLOURED, MEDIUM BODIED



Size	CONTAINER TYPE	CAPACITY IN ML
1 oz	Tube	29.5
2 oz	Tube	59
4 oz	Tin	118
8 oz	Tin	237
16 oz	Tin	473
32 oz	Tin	946

SINGLE STEP uPVC AQUALIFE SOLVENT CEMENT - CLEAR, MEDIUM BODIED



Size	CONTAINER TYPE	CAPACITY IN ML
4 oz	Tin	118
8 oz	Tin	237
16 oz	Tin	473
32 oz	Tin	946

PRIMER - PURPLE COLOUR

8 oz	Tin	237
------	-----	-----



Size	CONTAINER TYPE	CAPACITY IN ML
4 oz	Tin	118
8 oz	Tin	237
16 oz	Tin	473
32 oz	Tin	946

2 STEP uPVC AQUALIFE SOLVENT CEMENT - GREY COLOURED. HEAVY BODIED



Size	ID	OD	SL	H	L
2½	73.56	87.58	44.45	138	230
3	89.5	104.74	47.63	138	252
4	114.99	132.11	57.15	171	295

BUTTERFLY VALVE




Size	ID	L1	H1	H2	L2	W
1½	40.5	132	155	62.5	175	30
2	50.5	147	157	72	175	38
2½	73.56	147	112	70	175	43
3	89.5	165	119	80	175	46
4	114.99	185	133	93	272	49
6	153.88	211	147	107	272	56

REDUCER ELBOW 90° (SCH 80)




Size	ID-1	OD-1	WT-1	SL-1	ID-2	OD-2	WT-2	SL-2	L	H
¾ x ½	26.97	34.79	3.91	25.4	21.64	29.91	3.73	22.23	57	54
1 x ½	33.78	42.88	4.55	28.58	21.64	29.1	3.73	22.23	65	64
1 x ¾	33.78	42.88	4.55	28.58	26.97	34.79	3.91	25.4	68	66

REDUCER TEE (SCH 80)



Size	ID-1	OD-2	WT-1	SL-1	ID-2	OD-2	WT-2	SL-2	L	H
¾ x ¾ x ½	26.97	34.79	3.91	25.4	21.64	29.1	3.73	22.23	56	80
1 x 1 x ½	33.78	42.88	4.55	28.58	21.64	29.1	3.73	22.23	67	92
1 x 1 x ¾	33.78	42.88	4.55	28.58	26.97	34.79	3.91	25.4	70	92
1¼ x 1¼ x ½	42.55	52.25	4.85	31.75	21.64	29.1	3.73	22.23	70	108
1¼ x 1¼ x ¾	42.55	52.25	4.85	31.75	26.97	34.79	3.91	25.4	73	108
1¼ x 1¼ x 1	42.55	52.25	4.85	31.75	33.78	42.88	4.55	28.58	75	108
1½ x 1½ x ½	48.72	58.88	5.08	34.93	21.64	29.1	3.73	22.23	75	117
1½ x 1½ x ¾	48.72	58.88	5.08	34.93	26.97	34.79	3.91	25.4	82	117
1½ x 1½ x 1	48.72	58.88	5.08	34.93	33.78	42.88	4.55	28.58	82	117
1½ x 1½ x 1¼	48.72	58.88	5.08	34.93	42.55	52.25	4.85	31.75	87	117
2 x 2 x ½	60.78	71.86	5.54	38.1	21.64	29.1	3.73	22.23	88	100
2 x 2 x ¾	60.78	71.86	5.54	38.1	26.97	34.43	3.73	25.4	93	135
2 x 2 x 1	60.78	71.86	5.54	38.1	33.78	42.88	4.55	28.58	95	135
2 x 2 x 1¼	60.78	71.86	5.54	38.1	42.55	52.25	4.85	31.75	100	135
2 x 2 x 1½	60.78	71.86	5.54	38.1	48.72	58.88	5.08	34.93	104	135
2½ x 2½ x 2	73.56	87.58	7.01	44.45	60.78	71.86	5.54	38.1	82.2	161
3 x 3 x 2½	89.51	104.75	7.62	47.63	73.38	83.7	5.16	44.45	95.45	181.1

REDUCER TEE (SCH 80)



Size	ID-1	OD-2	WT-1	SL-1	ID-2	OD-2	WT-2	SL-2	H
¾ x ¾ x ½	26.97	34.79	3.91	25.4	21.64	29.1	3.73	22.23	56
1 x 1 x ½	33.78	42.88	4.55	28.58	21.64	29.1	3.73	22.23	66
1 x 1 x ¾	33.78	42.88	4.55	28.58	26.97	34.79	3.91	25.4	65
1¼ x 1¼ x ½	42.55	52.25	4.85	31.75	21.64	29.1	3.73	22.23	69
1¼ x 1¼ x ¾	42.55	52.25	4.85	31.75	26.97	34.79	3.91	25.4	68
1¼ x 1¼ x 1	42.55	52.25	4.85	31.75	33.78	42.88	4.55	28.58	68
1½ x 1½ x ½	48.72	58.88	5.08	34.93	21.64	29.1	3.73	22.23	74
1½ x 1½ x ¾	48.72	58.88	5.08	34.93	26.97	34.79	3.91	25.4	76
1½ x 1½ x 1	48.72	58.88	5.08	34.93	33.78	42.88	4.55	28.58	75
1½ x 1½ x 1¼	48.72	58.88	5.08	34.93	42.55	52.25	4.85	31.75	74
2 x 2 x ½	60.78	71.86	5.54	38.1	21.64	29.1	3.73	22.23	85
2 x 2 x ¾	60.78	71.86	5.54	38.1	26.97	34.43	3.73	25.4	85
2 x 2 x 1	60.78	71.86	5.54	38.1	33.78	42.88	4.55	28.58	85
2 x 2 x 1¼	60.78	71.86	5.54	38.1	42.55	52.25	4.85	31.75	83
2 x 2 x 1½	60.78	71.86	5.54	38.1	48.72	58.88	5.08	34.93	83
2½ x 2½ x 2	73.56	87.58	7.01	44.45	60.78	71.86	5.54	38.1	104
3 x 3 x 2½	89.51	104.75	7.62	47.63	73.38	83.7	5.16	44.45	107



KNOW MORE

FREQUENTLY ASKED QUESTIONS



WHY LEAD FREE?

Lead free plumbing is the most favored system for potable water transportation worldwide. Lead, even in small quantities, is a toxic substance that can leach into drinking water through pipes and fittings, posing serious health risks — particularly for young children and pregnant women. By eliminating lead entirely from the piping system, Poddar ensures that the water reaching your tap is safe, clean, and free from harmful contamination.

WHY UV RESISTANT?

U.V. Resistance prevents the oxidation process and helps to increase the durability of pipes and fittings. In case of using paint on uPVC piping system, only Latex based paints which are water based to make it workable and brushable. NO OIL / Solvent based paints are to be used as these paints can drastically reduce the life of the systems.

WHAT ARE THE KEY FEATURES OF THE WATER HAMMER ARRESTOR?

- BSP solid hex brass adapter or solder end connection for easy installation.
- Approved for installation with no access panel requirement.
- May be installed in new or existing plumbing systems with a standard pipe tee vertically or horizontally.
- Maintenance free – piston is the only moving part.
- Air pre-load is 60psi (4.20 bar) in the chamber.
- Factory air charged and permanently sealed.
- Long lasting product.

ANY SUGGESTION ON PUMP ROOM APPLICATION?

When a pump is switched on, it initially generates very high pressure which may damage fittings in the system. To avoid this, the following precautions should be followed:

- a. Increase the ramp-up time so the pump gradually builds pressure, preventing damage to initial fittings.
- b. Immediately after the pump, the 1st and 2nd fittings should be of metal.
- c. After the metal bends, use Schedule 80 pipes and fittings, with jointing done using 2-step solvent cement.
- d. Provide proper supports to avoid sagging of piping.

WHAT ABOUT HEALTH, SAFETY AND FIRE TOXICITY ISSUES?

Tests performed at various independent laboratories confirm that uPVC is superior to metal systems in terms of water quality effects and “no more toxic than wood” in fire. Aqua uPVC system is manufactured from a compound which is lead free and hence most favored system in terms of health and safety, LOI of uPVC is 45, which means uPVC is not really burnable in atmosphere. Once the burning source is removed, it stops burning.

WILL AQUA UPVC SOLVENT WELD SYSTEM SAVE ME MONEY?

Yes, As a professional, you will quickly realize that uPVC can be installed much faster than metal systems. Financial savings are also realized with regard to lower tool costs and insurance advantage. Even considering the frequent rise and fall of the metal price structure, uPVC offers a continuing materials cost advantage, as much as full 50-60% of material savings today.

WHY AQUA UPVC PIPES?

Aqua uPVC pipes feature a Self Alignment System for correct alignment of fittings during fitment. Fittings have an alignment mark that matches with the blue stripe on the pipe, ensuring water outlet fittings are perpendicular to the wall surface — avoiding any repair or breakage after wall finishing is complete. Made with a special lead free compound, Poddar Aqua uPVC pipes are non-toxic and safe for drinking water. The Aqua plumbing system also offers a pressure bearing capacity twice that of threaded pipe.

WHAT IS REPAIR PATCH?

The Repair Patch is a flexible and durable permanent repair patch, ideal for use on PVC, steel, galvanized and copper piping, flashings, HVAC ducting, wood and concrete. It bonds to practically any rigid surface except polypropylene, and is watertight and resistant to extreme weather conditions. Curing is done in direct sunlight or with a U/V torch available with the product. The flexible material fits easily around any angle. Note: NOT SUITABLE for CPVC and Poly Propylene pipes. After curing, it can be sanded or painted as needed. Rated up to 10.5 kg/cm pressure, available in sizes 3" x 6", 6" x 9", and 9" x 12".



TERMS AND CAUTIONS

WARRANTY AND LIMITATIONS

PODDAR PIPES LIMITED WARRANTY

Poddar Pipes guarantees to the original purchaser that its products are free from manufacturing defects and comply with all applicable ASTM standards when used under normal operating conditions. The buyer's sole remedy under this warranty is limited to the replacement of, or credit for, any product found to be defective. This warranty is non-transferable and is valid only for the original purchaser of the product.

This warranty does not include the cost of removing or reinstalling any defective product, nor does it cover incidental, consequential, or punitive damages of any kind. Poddar Pipes shall not be responsible for labour charges, installation expenses, or damage to surrounding property resulting from a defective product. All warranty claims must be accompanied by valid proof of purchase and are subject to inspection, evaluation, and approval by Poddar Pipes before any replacement or credit is granted.

THE LIMITED WARRANTY WILL NOT APPLY IF:

MIXED BRAND USAGE

Using Poddar CPVC pipes or fittings in combination with pipes, fittings, or solvent cement from any other brand or manufacturer will void the warranty.

INCORRECT APPLICATION

The warranty does not cover products that have been used for purposes other than the distribution of domestic water.

DESIGN OR INSTALLATION DEFECTS

Any product failure resulting from deficiencies in design, engineering, or installation will not be covered under the limited warranty.

UNTESTED JOINTS

Joints that have not been pressure tested prior to plastering or concealing of casings will not be eligible for warranty claims.

SUNLIGHT EXPOSURE & EXPANSION LOOP

For open hot water lines, the warranty will not apply if the expansion loop is not used as instructed. Pipes exposed to severe sunlight must be coated with the recommended protective paint on all pipes and fittings.

INSTALLATION MANUAL NOT FOLLOWED

Failure to adhere to the provided installation manual during the setup and use of the product will invalidate the warranty.

TEMPERATURE LIMITS EXCEEDED

The warranty will not apply if the operating temperature exceeds 93°C for short-term use or 82°C for continuous use.

MECHANICAL DAMAGE

The pipe is not warranted against damage caused by external mechanical actions such as nailing, drilling, or chiseling.

GEYSER MALFUNCTION

Warranty claims will not be accepted in cases of failure resulting from a geyser short circuit or temperature control system malfunction.



www.poddarpipes.com
poddarpipes@gmail.com

CIN: 29AAEC02313F1ZQ

 **PODDAR PIPES PVT. LTD.**
4th Floor, 1202, HAL 2nd Stage
Domlur, 100 Feet Road, Indiranagar,
Bengaluru, Karnataka - 560008