


**ORBIT ENGINEERING –
CENTERING AUTOMATION AROUND
WHAT MATTERS**



**PRECISION AUTOMATION.
RELIABLE PERFORMANCE.**

PRODUCT CATALOG

PRESSURE, LEVEL, TEMPERATURE

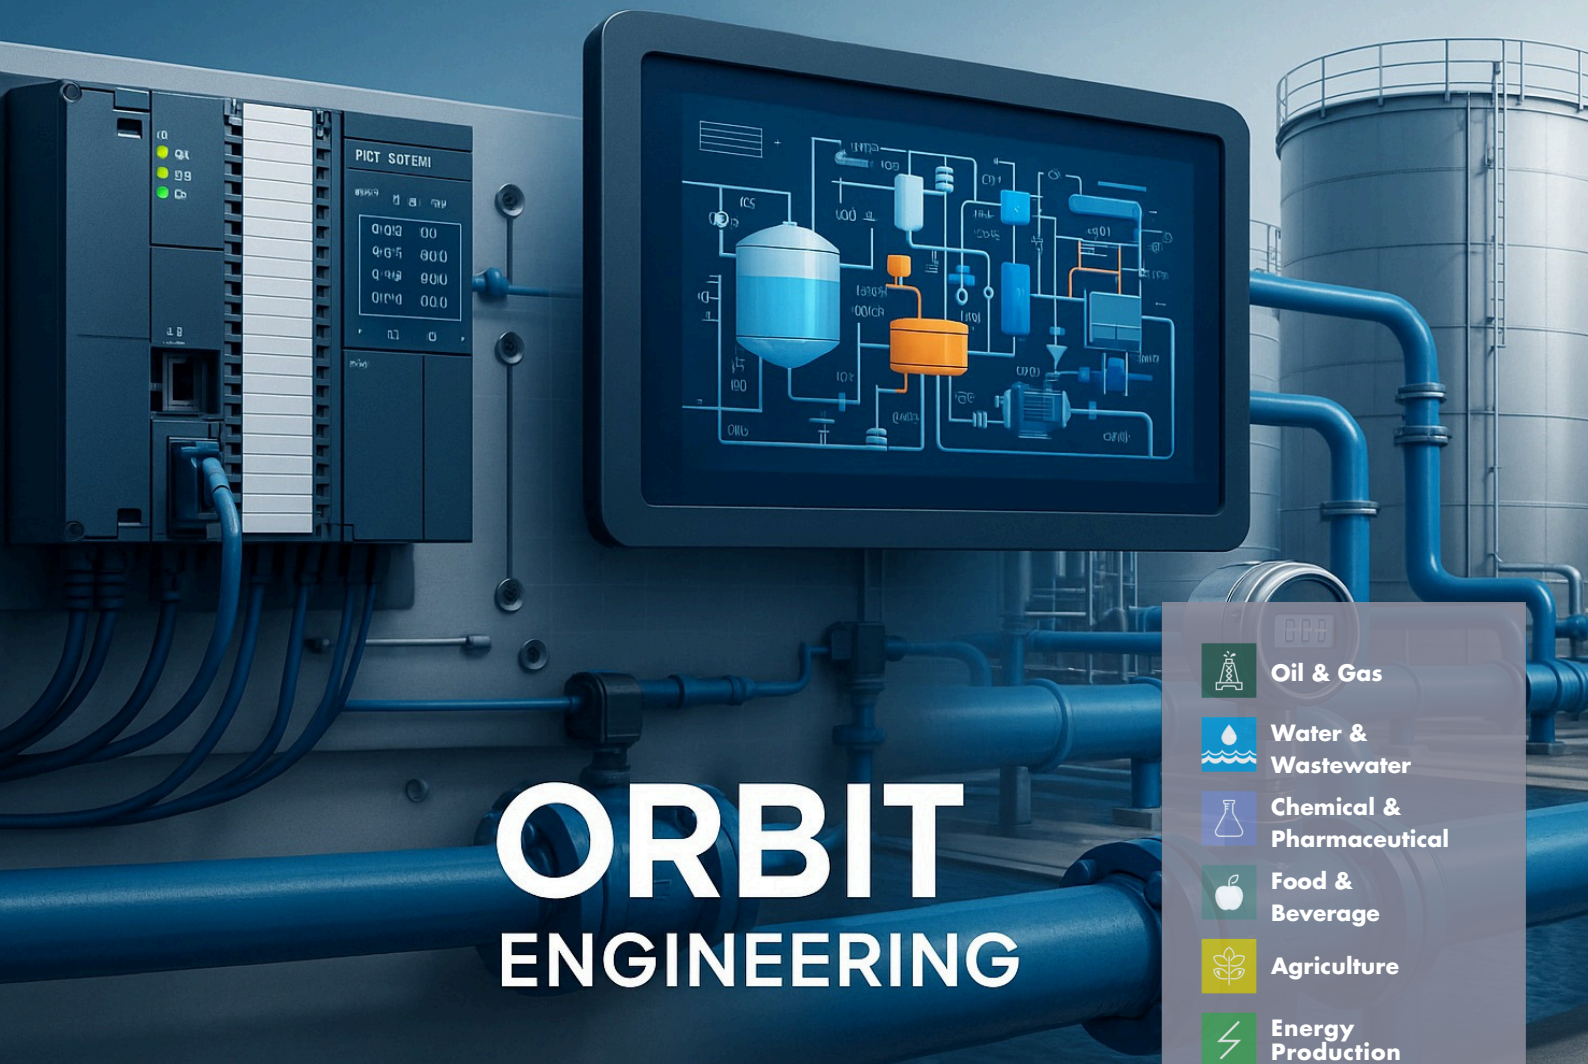

ORBIT ENGINEERING



Oil & Gas



Water &
Wastewater



Chemical &
Pharmaceutical



Food &
Beverage



Agriculture



Energy
Production



Construction
Materials



Packaging
Industry



Heavy
Industry



Marine &
Shipping

WHO WE ARE




Orbit Engineering India's leading system integrator in the water and wastewater domain. We specialize in industrial automation, PLC-SCADA solutions, instrumentation, and advanced sensing technologies. As an authorized partner of NIVELCO, we deliver world-class level, flow, and pressure measurement solutions with complete engineering, installation, and service capability.



**PRECISION
MEASUREMENT FOR A
SMARTER TOMORROW.**

Service And Products

Application Wise Pictures are Given below for your ready reference.

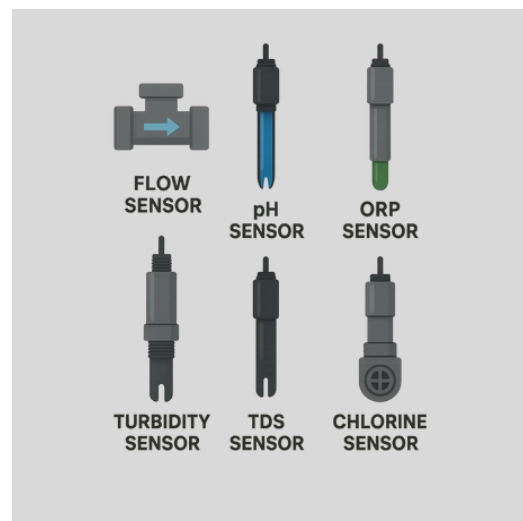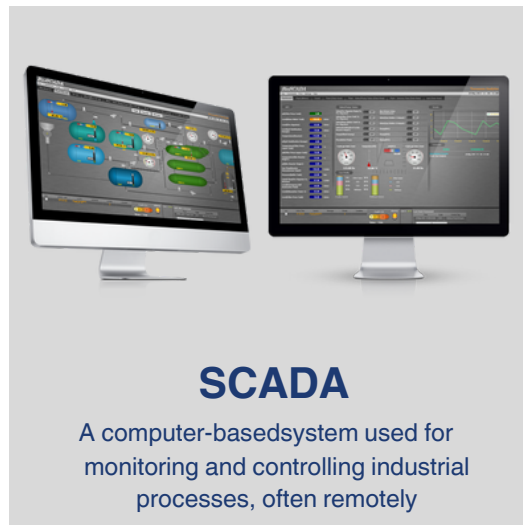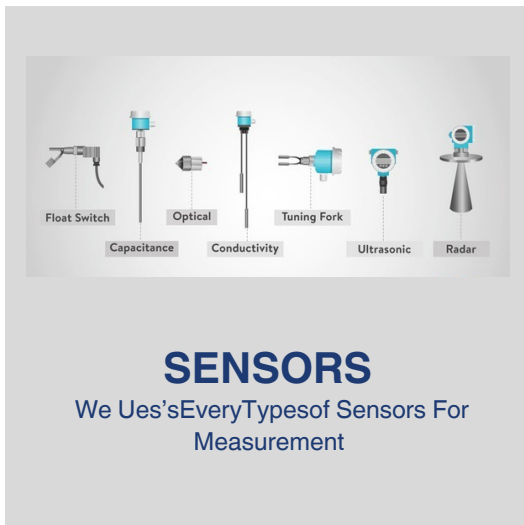

Service And Products

Application Wise Pictures are Given below for your ready reference.



WATER METER




VT & HT PUMPS



**ELECTRO FUSION
WELDING MACHINE**



CHLORINATOR

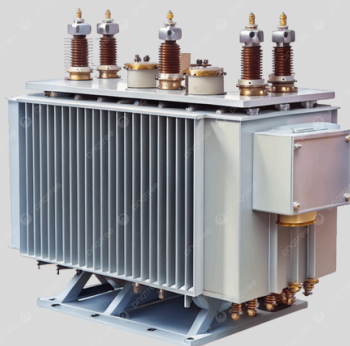

TRANSFORMERS




**DG (DIESEL
GENERATOR)**

Our Areas of Expertise



Water Treatment

Smart automation for filtration, pumping, and level control with real-time SCADA monitoring.




Sewage Treatment

Efficient control and monitoring for aeration, sludge, and discharge processes.



Effluent Treatment

Treats industrial wastewater to remove harmful contaminants

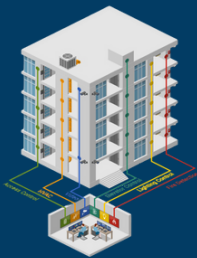


Building Management System (BMS)

Centralized automation for lighting, HVAC, and energy optimization.



Solar System

Real-time monitoring and control to maximize solar energy performance.

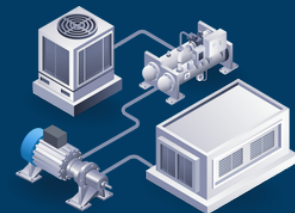


HAVC

Intelligent temperature and airflow control for comfort and energy efficiency.




Power Management System

Smart power control for efficient load management and energy savings.



Scour Monitoring

Real-time scour depth detection ensuring structure safety and maintenance alerts.

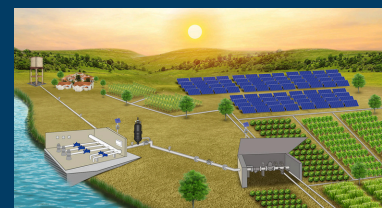

Outlet Management System (OMS)

Automated monitoring of outlet flow and discharge with instant alerts.

Level Transmitter

Measured Values	Distance; Calculated values: Level, Volume, Mass, Flow		
Measuring Range	up to 30 m		
Supply Voltage	12...36 V DC		
Ambient Temperature	Standard version: -40...+70 °C; with display: -20...+70 °C; High-temperature version*: -40...+60 °C; with display -20...+60 °C		PVDF housing: -40...+80 °C; PP housing: -30...+80 °C
Process Temperature	Housing	Plastic	
		Aluminum	
		Stainless steel	
		Standard version: -40...+80 °C	High-temperature version ⁽¹⁾ : -40...+200 °C
Process Pressure	PP, PVDF, PTFE antennas: -1...3 bar; Stainless steel antennas: -1...40 bar		-1...3 bar
Output/Communication	Bluetooth® LE 5.1 (optional), 4...20 mA + HART®, optional SPDT output, service interface		
Process Connection	1", 1 1/2" BSP / NPT, TriClamp, prepared for welded flange		1", 1 1/2" BSP / NPT
Ingress Protection	IP66 / IP67		IP66 / IP68
Certificates	ATEX, IECEx ⁽²⁾ , ANATEL, INMETRO		



COMPACT

INTEGRATED



Supply Voltage	12...36 V DC	12...36 V DC
Ambient Temperature	-30...+65 °C	-25...+70 °C
Process Temperature	-30...+200 °C	-30...+200 °C
Process Pressure	-1...40 bar	up to 40 bar
Output	4...20 mA, HART®, relay (optional)	4...20 mA, HART®
Process Connection	1", 1 1/2" BSP / NPT, TriClamp, flanges or sanitary	1", 1 1/2" BSP / NPT
Ingress Protection	IP67	Probe: IP68. Housing: IP67
Certificates	ATEX, IEC Ex, INMETRO, UKCA Ex	ATEX
Measuring Range	up to 30 m	up to 20 m



GUIDED MICROWAVE

CAPACITIVE

Level Transmitter



Supply Voltage	12.5...36 V DC		–
Ambient Temperature	–40...+70 °C		–
Process Temperature	–40...+90 °C		–60...+250 °C
Process Pressure	up to 25 bar		up to 100 bar
Output	4...20 mA + HART®		–
Process Connection	1", 2" BSP / NPT	1", 2" BSP / NPT, TriClamp or flanges	DIN, ANSI flanges
Ingress Protection	IP65	IP67, IP68	IP65
Certificates	–	ATEX, IEC Ex, OIMLR85	ATEX, PED
Other	Measuring Range: 0.3...3.5 m 	Measuring Range: 0.3...15 m 	Medium Density: min. 0.75kg/dm ³ Flange Distance (CL to CL): 500...5500mm 

NIVOTRAC

NIVOFLIP



10...36 V DC	12...30 V DC
–40...+70 °C	–
–25...+125 °C	–40...+80 °C
up to 400 bar	–
–	4...20 mA, HART®, 0...10 V
½", 1", 1½" BSP, TriClamp, flanges	–
IP65	IP68
ATEX	ATEX, UKCA Ex, BV (Marine)
	up to 350 m
	

HYDROSTATIC

SUBMERSIBLE HYDROSTATIC

Level Transmitter

			
11...36 V DC	11.4...40 V DC; 11.4...28 V AC	2-wire: 12...36 V DC; 4-wire: 85...255 V AC, 20...28 V AC/DC	85...255 V AC; 11.4...40 V DC; 11.4...28 V AC
-30...+80 °C	-30...+60 °C	-30...+70 °C	-30...+60 °C
-30...+90 °C	-30...+60 °C	-30...+100 °C	-30...+75 °C
0.5...3 bar(absolute)	0.7...1.1 bar	0.5...3 bar (absolute)	0.7...1.1 bar
4...20 mA, HART®, relay			
1" BSP, 1½" and 2" NPT	1" BSP and joystick aiming device	1½", 2" BSP / NPT, flange	joystick aiming device
IP68	IP65	IP67	IP65
ATEX, INMETRO, UKCA Ex	ATEX, EAC Ex	ATEX, INMETRO, UKCA Ex	ATEX
MeasuringRange: 0.15...25 m (Pro: 0.15...18 m)	Measuring Range: 0.6...60 m	Measuring Range: 0.2...25 m	Measuring Range: 0.6...60 m
			
FOR LIQUIDS	FOR SOLIDS	FOR LIQUIDS	FOR SOLIDS

Level Switches

	  	    	
Supply Voltage	- - 0...	24...240 V AC/DC	-
Ambient Temperature	+50 °C	-20...+50 °C	-20...+80 °C
Process Temperature		up to +200 °C	-40...+250 °C
Process Pressure	NL-100: up to 1 bar, NW-100: up to 2 bar	up to 16 bar	up to 25 bar
Switch Rating	250 V AC, 10(3)A	250 V AC, 16 A / 8 A	250 V AC, 10 A NO/NC
Process Connection	-	¾", 1½" BSP	flanges, 2" BSP / NPT
Ingress Protection	IP68	IP20, IP67	IP65, IP68
Certificates	-	-	ATEX, IEC Ex, INMETRO, SIL 1, DNV (Marine), BV (Marine)
			
FLOAT	CONDUCTIVE	MAGNETIC COUPLING	

Level Switches

    		   	
–		20...255 V AC, 20...60 V DC	
–40...+95 °C		–40...+70 °C	
–40...+150 °C		–40...+130 °C	
up to 25 bar		up to 40 bar	
250 V AC, 3 A		1 or 2 relays (SPDT), 2-wire AC / DC, transistor (PNP, NPN)	
1", 2" BSP / NPT, TriClamp or flanges		1" BSP / NPT, 1½", 2"TriClamp,flangesorsanitary	1" BSP/NPT, 1½", 2" TriClamp or flanges
IP67, IP68		IP67, IP68, IP65	
ATEX, BV (Marine)		ATEX, IEC Ex, UKCA Ex, DNV (Marine)	ATEX
			
MAGNETIC TRACKING		VIBRATING FORK	

      			
Supply Voltage	20...255 V AC/DC	230 V AC, 120 V AC, 24 V AC, 24 V DC	20...250 V AC / 20...50 V DC
Ambient Temperature	–30...+60 °C	–30...+60 °C	–30...+65 °C
Process Temperature	–30...+160 °C	–20...+200 °C	–30...+235 °C
Process Pressure	up to 25 bar	up to 3 bar	up to 16 bar
Output	relay (SPDT) or electronic switch (SPST)	250 V AC 5 A, AC1	relay (SPDT) or electronic switch (SPST)
Process Connection	1½" BSP / NPT	1¼ NPT; 1", 1½" universal; mounting plate	¾", 1", 1½" BSP / NPT, 1¼" NPT
Ingress Protection	IP67		
Certificates	ATEX, IEC Ex, UKCA Ex, KCs Ex	ATEX, UKCA Ex	ATEX, IEC Ex
			
VIBRATING ROD		ROTARY PADDLE	
			
		RF-CAPACITANCE	

TEMPERATURE MEASUREMENT

								
Supply Voltage	10...36	V	11...36 V DC					
Ambient Temperature	DC	-40...	-30...+65 °C					
Process Temperature	+70 °C		-			-		
Process Pressure	max. 25 bar		-			-		
Output	4...20 mA, HART®							
Process Connection	½", ¾", 1" BSP, ½" NPT, M20×1.5, TriClamp, flanges or sanitary		1"; 1 ½" BSP / NPT; M20×1.5			1 ½" BSP / NPT		
Ingress Protection	Probe: IP68, Housing: IP65		Probe: IP66 , IP68, Housing: IP67					
Certificates	ATEX							
Other	Measuring range:-50...+600 °C		Measuring range:- 40...+125 °C Number of Sensors u:p to 15 Probe Length :rigid probe: 1...4 m; flexible probe: 1...50 m			Measuring range: -40...+85 °C Number of Sensors: up to 15 Probe Tensile Force: 35 kN Probe Length: 1...50 m		
								

TEMPERATURE TRANSMITTER

MULTI-POINT TEMPERATURE TRANSMITTER

            		
-	-	-
-30...+100 °C	-20...+80 °C	-30...+80 °C
-	-	-
max. 1 bar	up to 25 bar	up to 80 bar
-	-	-
M20×1.5; M8×1, integrated cable version up to 12 m	M20×1.5, ½" BSP / NPT, ¾" BSP or flanges	1" NPT or flanges
IP65, IP54	IP67	IP65, IP67
-	ATEX	ATEX
Measuring Range: -50...+200 °C Sensor Type: Class A / Class B Pt100	MeasuringRange:-50...+600 °C Sensor Type: Class A / Class B Pt100	MeasuringRange: -50...+600 °C SensorType: Class A / Class B Pt100, or J, K thermocouple
		
TEMPERATURE SENSOR	ENCAPSULATED	STRENGTHENED PROBE

PRESSURE SENSORS



Sensor	silicon, ceramic, stainless steel	ceramic, stainless steel	silicon, stainless steel
Ambient Temperature	-40...+85 °C		
Process Temperature	-40...+125 °C	-40...+300 °C	-40...+125 °C
Nominal Pressure Gauge	-1...600 bar	-1...2200 bar	0...70 bar
Accuracy	0.25%; 0.5%, 1%	0.1%; 0.2%; 0.25%; 0.5%	0.075%, 0.1%, 0.5%, 1%
Output	1, 2 or 4 PNP contacts	4...20 mA, 0...10 V, HART®	
Process Connection	1/8", 1/4", 1/2", 3/4", 1", 1 1/2", 2" BSP; 1/4", 1/2" NPT, M20x1.5, TriClamp, flanges or sanitary	1/4", 1/2", 3/4", 1", 1 1/2" BSP; 1/4", 1/2", 1" NPT, M20x1.5, TriClamp, flanges or sanitary	Ø6.6 x 11 (for flex. tubes Ø6), Ø4.45 x 10 (for flex. tubes Ø4),
Ingress Protection	IP54, IP65, IP67		

⁽¹⁾If an Ex version is required, please request a custom quote based on the information in the price list.
Orders based on the quote will be considered official.



PRESNSIUPREE SSW DITKCHES

PRESSURNEI PTRAESNSS DMITTERS

DIFNFEIRPERNESTSIA DL DPT

Valves



Butterfly Valves

Durable Cast Iron Butterfly Valve
Smooth Operation, 100% Tight Sealing,
and Long-Lasting Reliability.




Gate Valve

Robust Ductile Iron Body with Resilient
Seating for Bubble-Tight Shut-Off.



Sluice Valve

Engineered for Superior Flow
Control and Maximum Durability
in High-Pressure Pipelines.

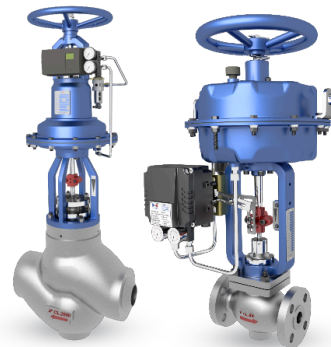

Control-Valves

Automatic Pneumatic Control Valve
High-Precision Modulation for Accurate
Pressure and Flow Regulation.

Actuators



Multi-Turn Actuator

High-Precision Automation for
Remote Valve Control and Intelligent
Pipeline Management.



Multi-Turn Actuator

High-Torque Multi-Turn Electric
Actuator Reliable Power and Precision
for Industrial Valve Automation.



Part-Turn Actuator

Compact Part-Turn Electric Actuator
Precision 90-Degree Automation for Seamless
Butterfly and Ball Valve Control.



Part-Turn Actuator

Precision Engineering for Smart
Automation across Gate, Globe,
and Butterfly Valves.

MAJOR Clients



GeM
Government
e Marketplace



DBL



जल शक्ति मंत्रालय
MINISTRY OF
JAL SHAKTI

सत्यमेव जयते



PWD
Public Works Department



ORBIT GROUP

HEAD OFFICE

Orbit Engineering Solution

12/2 Shalimar Enclave Arera Colony
,Bhopal Madhya Pradesh , India

Orbit Engineering Company

B-32/A, Priyadarshini Society,
Asharam Nagar , Bagsewaniya,
Bhopal ,India



 www.orbitengineering.com

 vijaytiwari@orbitengineerings.com

 Bhopal , 462016

-  **Oil & Gas**
-  **Water & Wastewater**
-  **Chemical & Pharmaceutical**
-  **Food & Beverage**
-  **Agriculture**
-  **Energy Production**
-  **Construction Materials**
-  **Packaging Industry**
-  **Heavy Industry**
-  **Marine & Shipping**

Orbitengineering...

