

Lithium Battery -Forklift Series

ST-Li-2450




Features Of LiFePO4 Battery

- Long cycle life
- High integration, small size, high energy density
- Intelligent management of product usage status with high security
- Environmental protection
- Capable of 1C fast charging

Application scenarios

- Forklift
- Lead-acid battery to lithium battery vehicles
- Industrial control products
- Rescue vehicles such as scissor forklifts

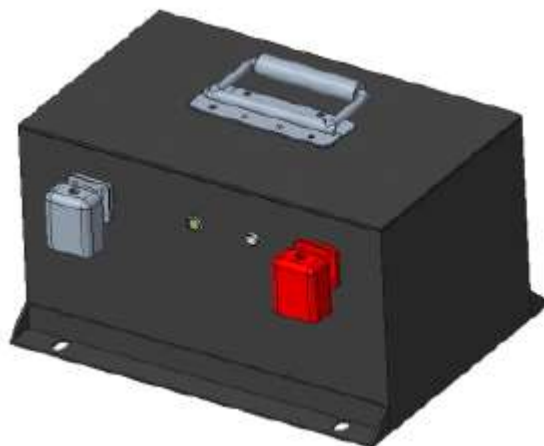

Specification

Nominal Voltage	25.6V
Working Voltage	20-29.2V
Nominal Capacity	50Ah
Energy	1280Wh
Self Discharge	≤2% Per Month
IP Grade	IP65
Positive material	Lithium ironphosphate
Cell type	Prismatic
Combination method	50Ah,1P8S
Weight	ABOUT 23.0KG
Dimension LxWxH	L240W310H190mm
Fixed size	NO
Terminal Type	M8 Terminal Bolts, 12±2Nm
Shell type	Powder Coated Steel
Handle	YES
Storage Temp. short term	-20-45°C
Storage Temp. long term	-20-35°C
Cycle Life	5000 cycles(80%DOD)
Heating function	No
Cooling type	No
Insulation	20MΩ/1000VDC, @25±5°C, RH50%
Bluetooth	YES

Charging

Recom. Charging Current	25A
Upper limit voltage	28.8V
Charging Temp. Range	0~45°C

DisCharging

Max Continuous Discharge	50A
Max Discharge current	100A@10S
Lower limit voltage	20.0V
BMS Voltage Recovery	22.4V
Discharge Temp. Range	-20-60°C

Function (optional)

(CAN/RS485), Bluetooth, Charger

Physical Dimension-mm

