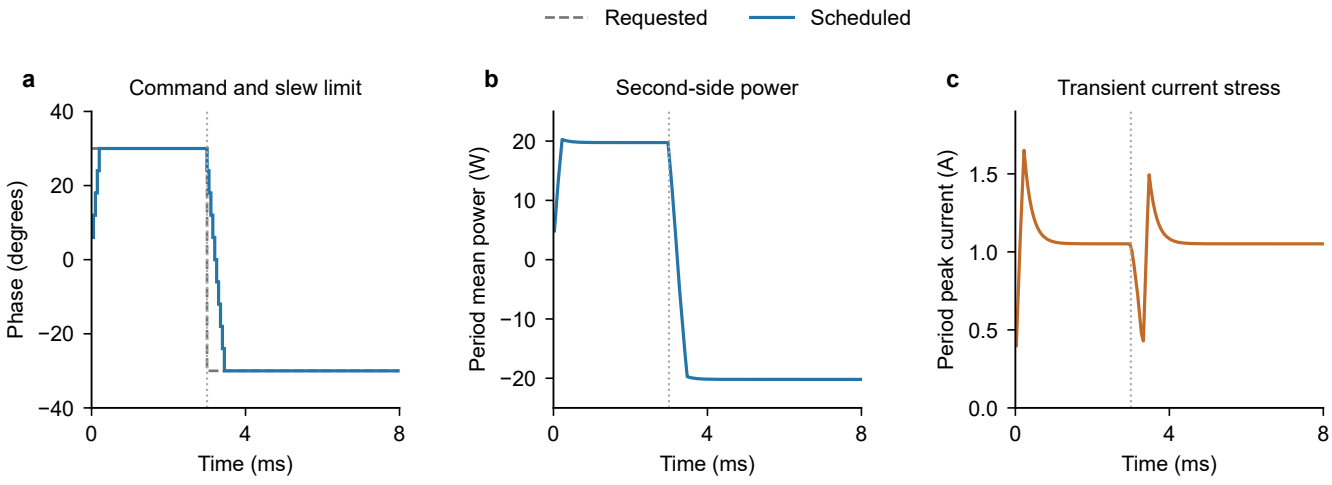
P4: Phase-command reversal with retained current state
Requested
Scheduled
a
Command and slew limit
Phase (degrees)
40
20
0
−20
−40
0
4
8
Time (ms)
b
Second-side power
Period mean power (W)
20
10
0
−10
−20
0
4
8
Time (ms)
c
Transient current stress
Period peak current (A)
1.5
1.0
0.5
0.0
0
4
8
Time (ms)
R-L simulation | All 160 periods | No device loss or efficiency model