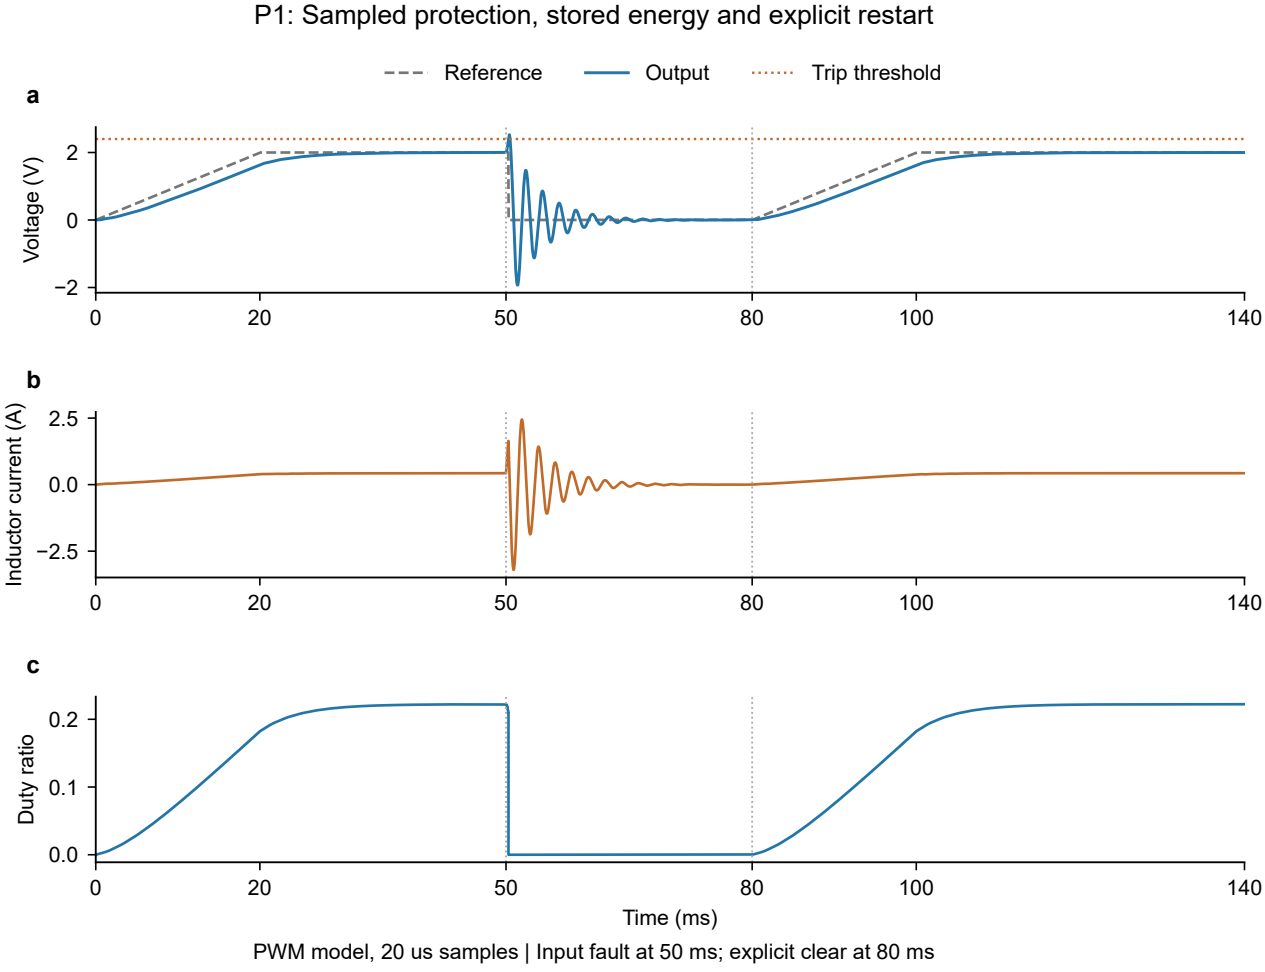
P1: Sampled protection, stored energy and explicit restart
Reference
Output
Trip threshold
a
Voltage (V)
2
0
−2
0
20
50
80
100
140
b
Inductor current (A)
2.5
0.0
−2.5
0
20
50
80
100
140
c
Duty ratio
0.2
0.1
0.0
0
20
50
80
100
140
Time (ms)
PWM model, 20 us samples | Input fault at 50 ms; explicit clear at 80 ms