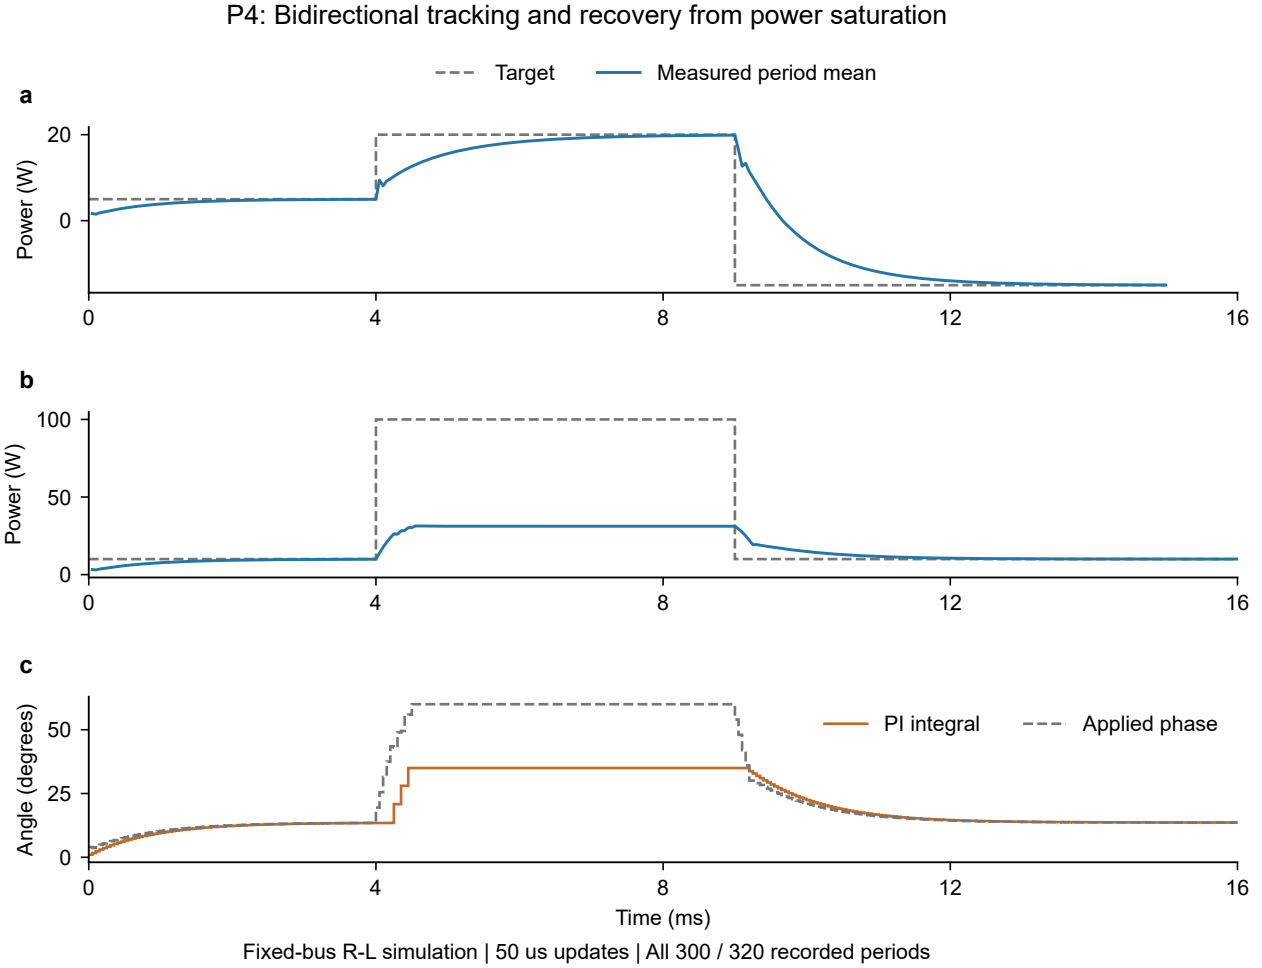
P4: Bidirectional tracking and recovery from power saturation
Target
Measured period mean
a
Power (W)
20
0
0
4
8
12
16
b
Power (W)
100
50
0
0
4
8
12
16
c
Angle (degrees)
50
25
0
PI integral
Applied phase
0
4
8
12
16
Time (ms)
Fixed-bus R-L simulation | 50 us updates | All 300 / 320 recorded periods