



US008699969B2

(12) **United States Patent**
Wang et al.

(10) **Patent No.:** **US 8,699,969 B2**
(45) **Date of Patent:** ***Apr. 15, 2014**

(54) **REVERSE LINK MOBILE TRANSMIT DIVERSITY**

(71) Applicant: **VIA Telecom, Inc.**, San Diego, CA (US)

(72) Inventors: **Shu Wang**, San Diego, CA (US);
Hong-Kui Yang, San Diego, CA (US)

(73) Assignee: **VIA Telecom Co., Ltd.**, George Town (KY)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **13/905,903**

(22) Filed: **May 30, 2013**

(65) **Prior Publication Data**

US 2013/0259147 A1 Oct. 3, 2013

Related U.S. Application Data

(63) Continuation of application No. 12/840,473, filed on Jul. 21, 2010, now Pat. No. 8,472,892.

(60) Provisional application No. 61/227,077, filed on Jul. 21, 2009, provisional application No. 61/235,368, filed on Aug. 20, 2009, provisional application No. 61/241,029, filed on Sep. 10, 2009.

(51) **Int. Cl.**
H04B 1/00 (2006.01)
H04B 7/00 (2006.01)
H04B 17/00 (2006.01)

(52) **U.S. Cl.**
USPC **455/101**; 455/522; 455/69; 455/115.1;
455/226.1

(58) **Field of Classification Search**

CPC H04B 7/0417

USPC 455/101, 562.1, 524, 525, 560

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,879,813	B2 *	4/2005	Reznik	455/67.11
7,054,639	B2 *	5/2006	Lin et al.	455/452.1
7,633,905	B1 *	12/2009	Harel et al.	370/334
7,945,222	B2 *	5/2011	Harel et al.	455/101
7,961,807	B2 *	6/2011	Kotecha et al.	375/267
7,965,649	B2 *	6/2011	Tee et al.	370/252
7,986,672	B2 *	7/2011	Tiedemann et al.	370/332
8,095,166	B2	1/2012	Sampath et al.	
8,280,430	B2	10/2012	Naguib et al.	
8,290,098	B2 *	10/2012	Onggosanusi et al.	375/346
8,340,605	B2	12/2012	Hou et al.	

(Continued)

FOREIGN PATENT DOCUMENTS

CN	101064529	10/2007
CN	101138220	3/2008
CN	101399799	4/2009


Primary Examiner — Tilahun B Gesesse

(74) *Attorney, Agent, or Firm* — Richard K. Huffman; James W. Huffman

(57) **ABSTRACT**

An access network is wirelessly coupled to an access terminal. The access network comprises a plurality of communication modules, a transmitter and a channel estimator. The plurality of communication modules coupled to the access terminal and configured to transmit a plurality of signals. The transmitter coupled to the access terminal and configured to send an index which indicates number of the plurality of signals. The channel estimator, configured to adjust and modulate a channel state information into the plurality of signals.

28 Claims, 17 Drawing Sheets

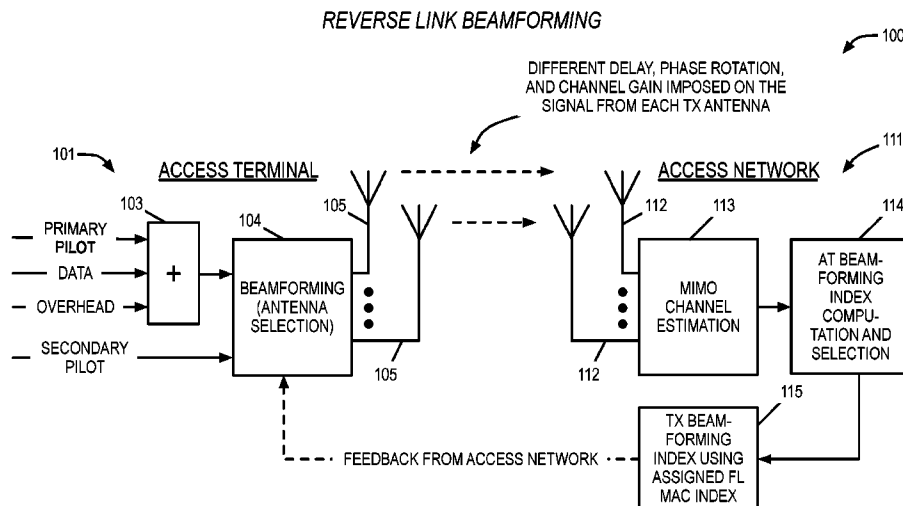

(56)

References Cited

U.S. PATENT DOCUMENTS

8,369,793 B2 * 2/2013 Molnar 455/67.13
 8,374,650 B2 * 2/2013 Kotecha et al. 455/561
 8,542,765 B2 * 9/2013 Mantravadi et al. 375/295
 2002/0196842 A1 * 12/2002 Onggosanusi et al. 375/148
 2003/0161285 A1 * 8/2003 Tiedemann et al. 370/332
 2004/0147234 A1 * 7/2004 Lin et al. 455/101
 2007/0099670 A1 5/2007 Naguib et al.

2007/0104087 A1 * 5/2007 Tee et al. 370/208
 2008/0130613 A1 * 6/2008 Tiedemann et al. 370/342
 2008/0144737 A1 * 6/2008 Naguib 375/299
 2008/0227405 A1 * 9/2008 Harel et al. 455/69
 2011/0081871 A1 * 4/2011 Molnar 455/67.13
 2011/0134848 A1 * 6/2011 Tamaki 370/328
 2012/0087304 A1 * 4/2012 Porat et al. 370/328
 2013/0010845 A1 * 1/2013 Onggosanusi et al. 375/219
 2013/0114425 A1 * 5/2013 Sayana et al. 370/252
 2013/0301551 A1 * 11/2013 Ghosh et al. 370/329

* cited by examiner

REVERSE LINK BEAMFORMING

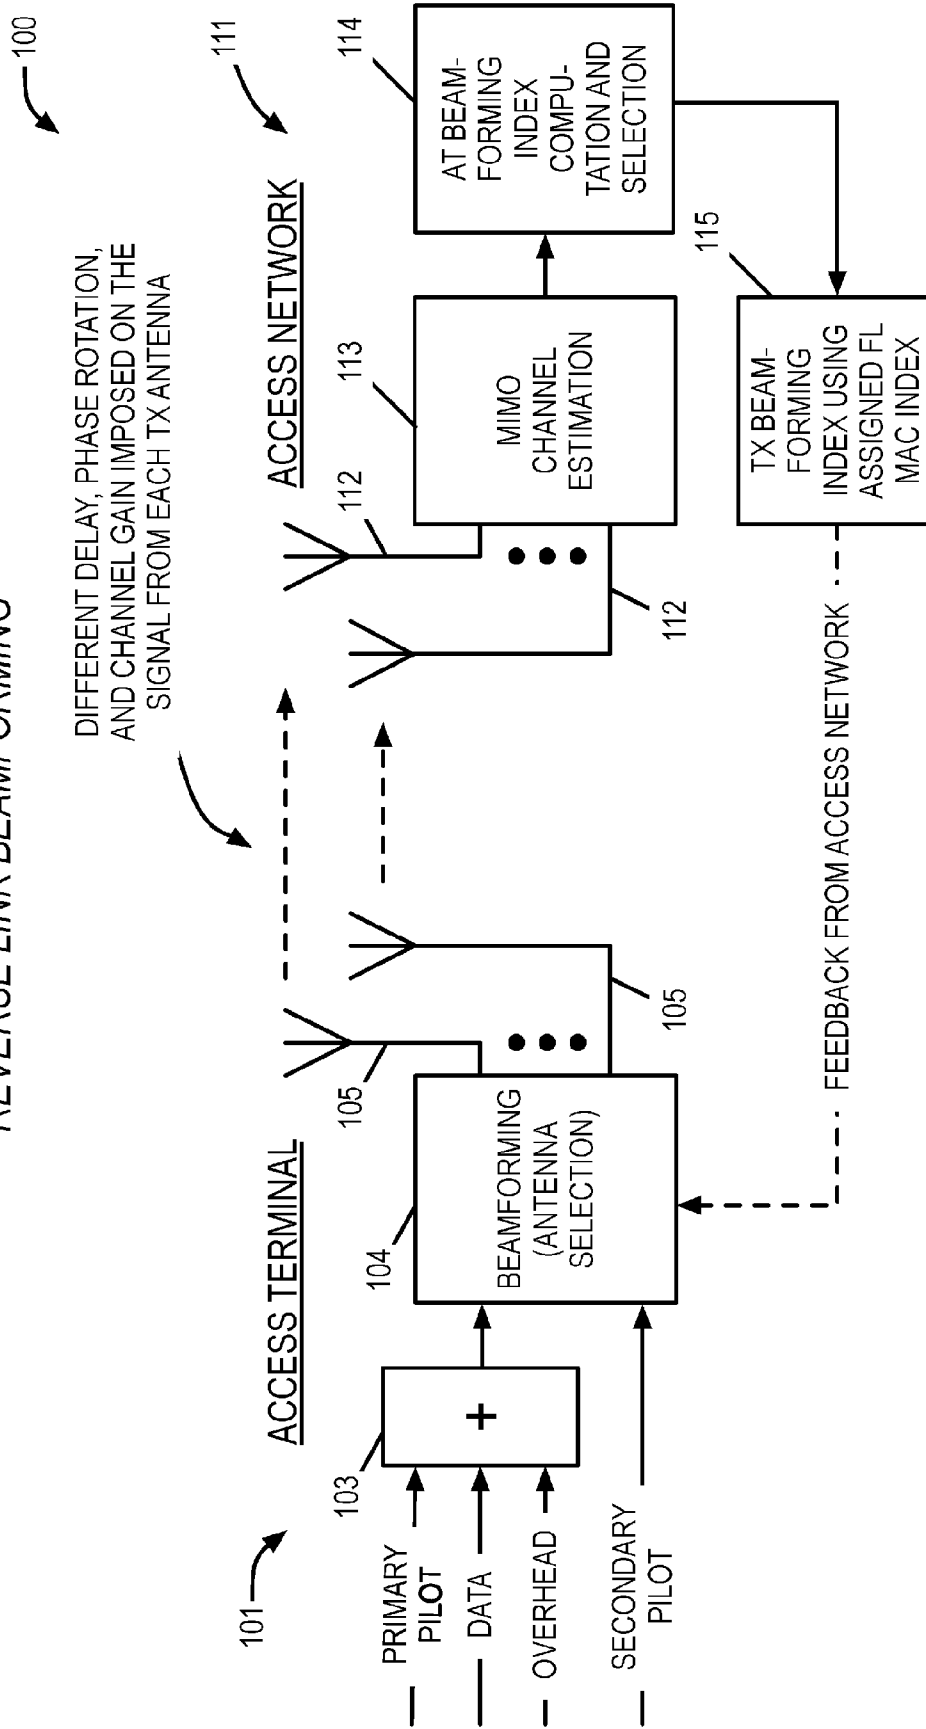
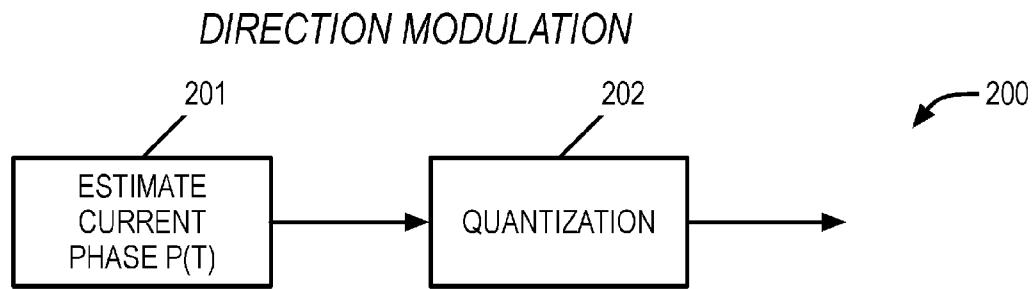
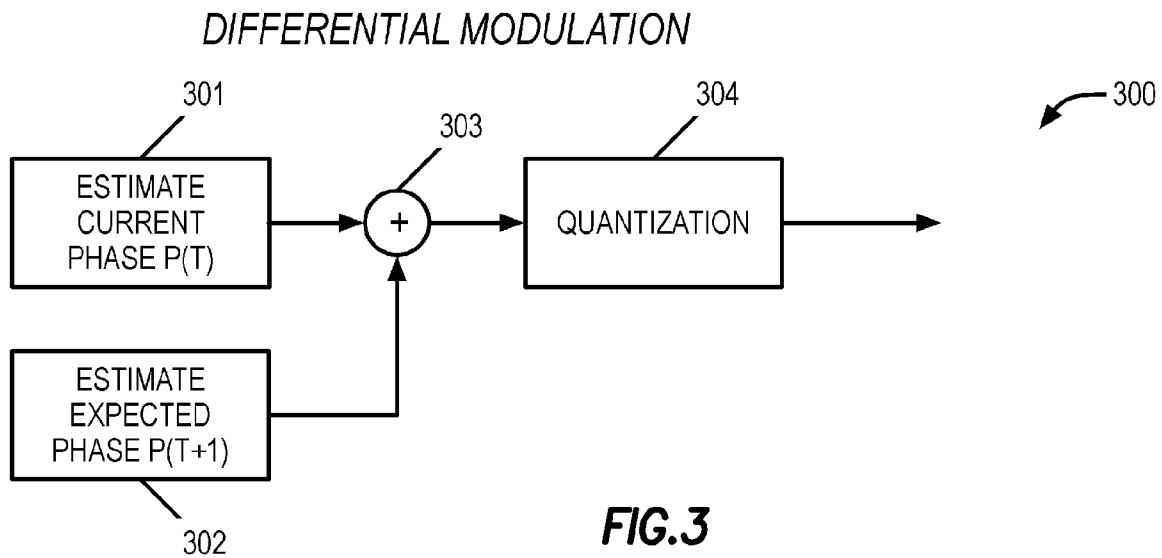


FIG. 1

**FIG.2****FIG.3**

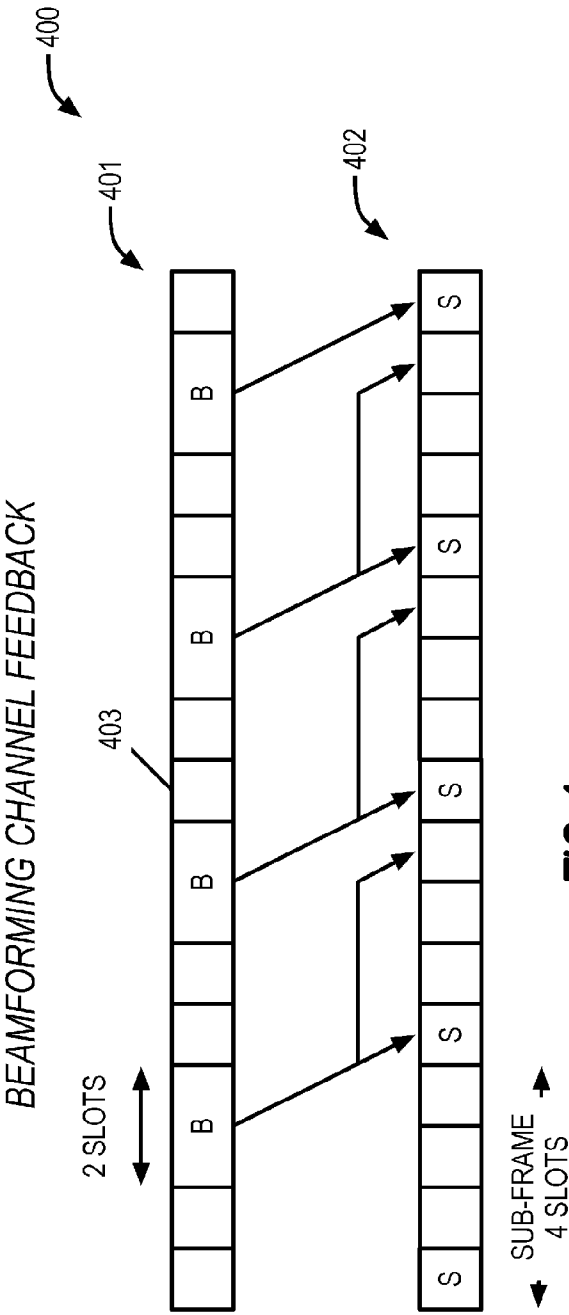


FIG.4

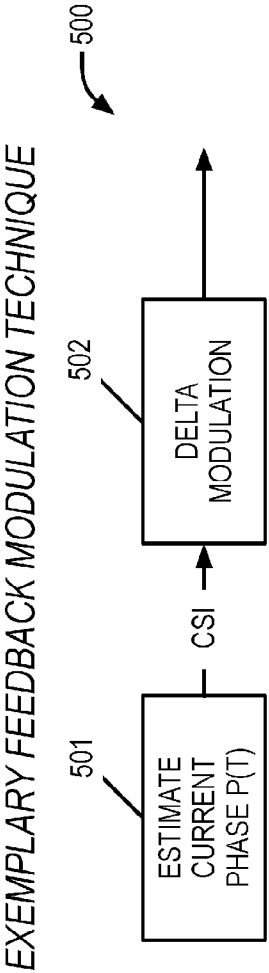


FIG.5

600

ALTERNATIVE EXEMPLARY FEEDBACK MODULATION TECHNIQUE

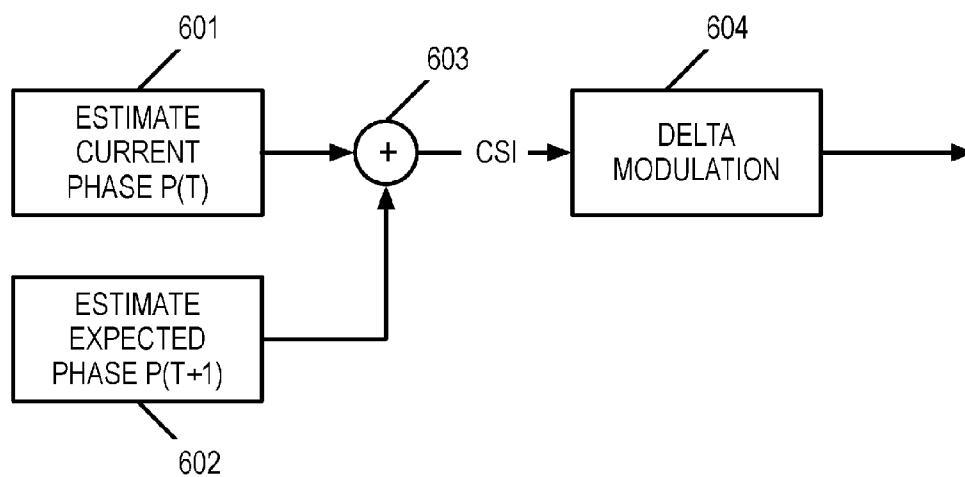


FIG. 6

EXEMPLARY DELTA MODULATOR

700




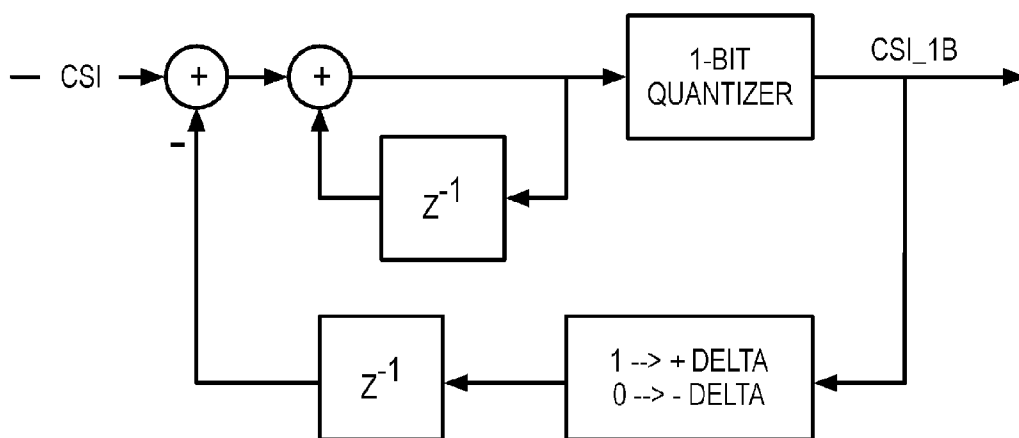


FIG. 7

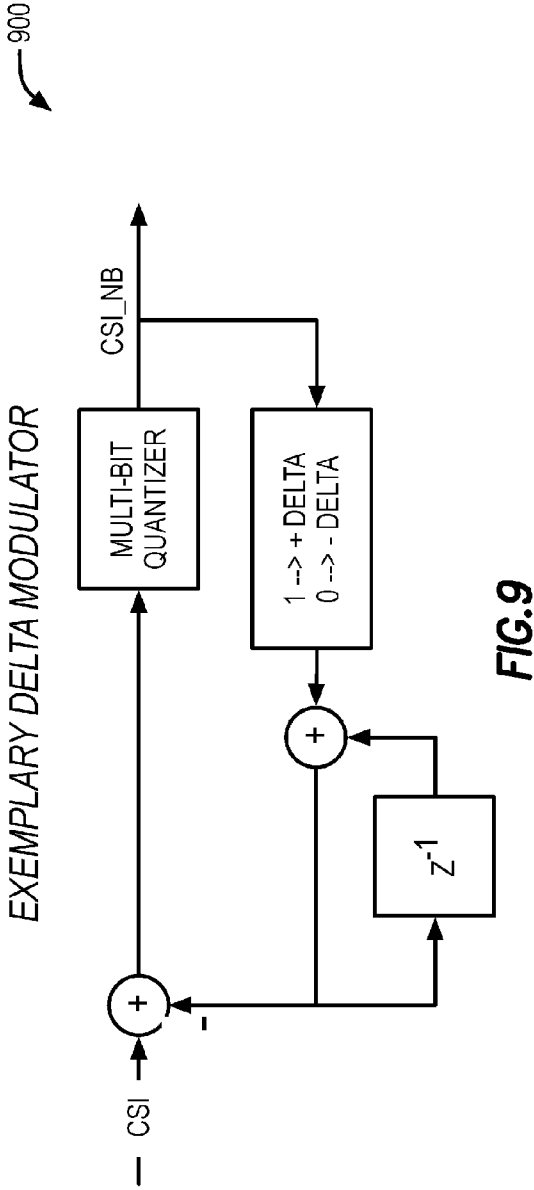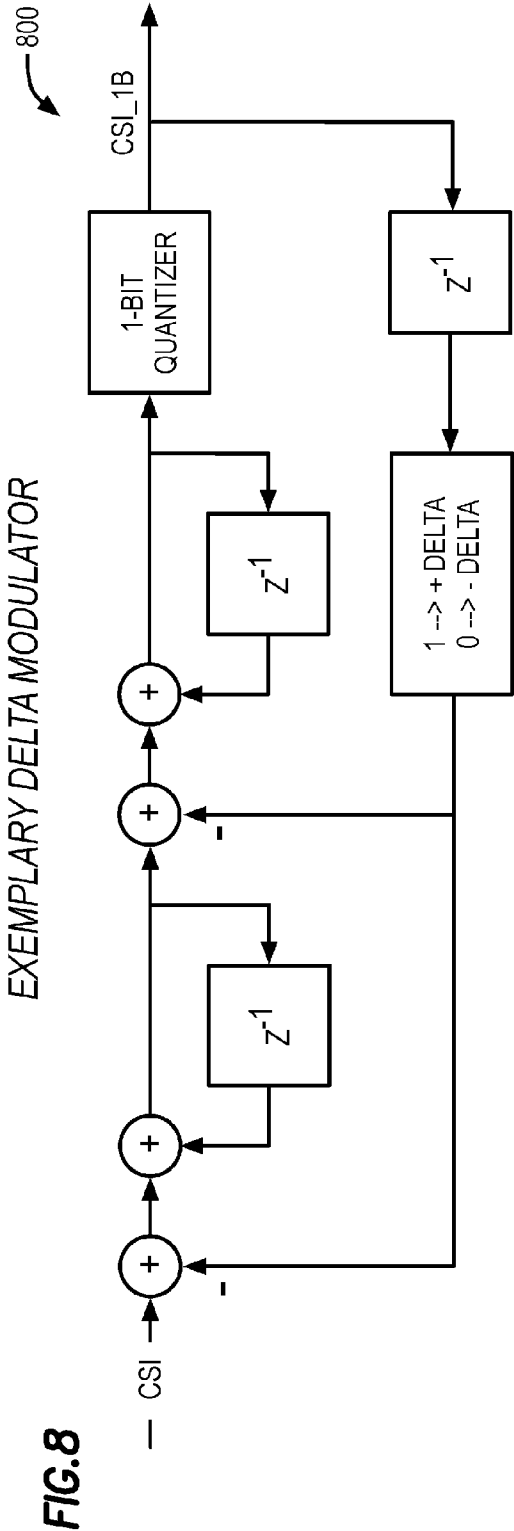

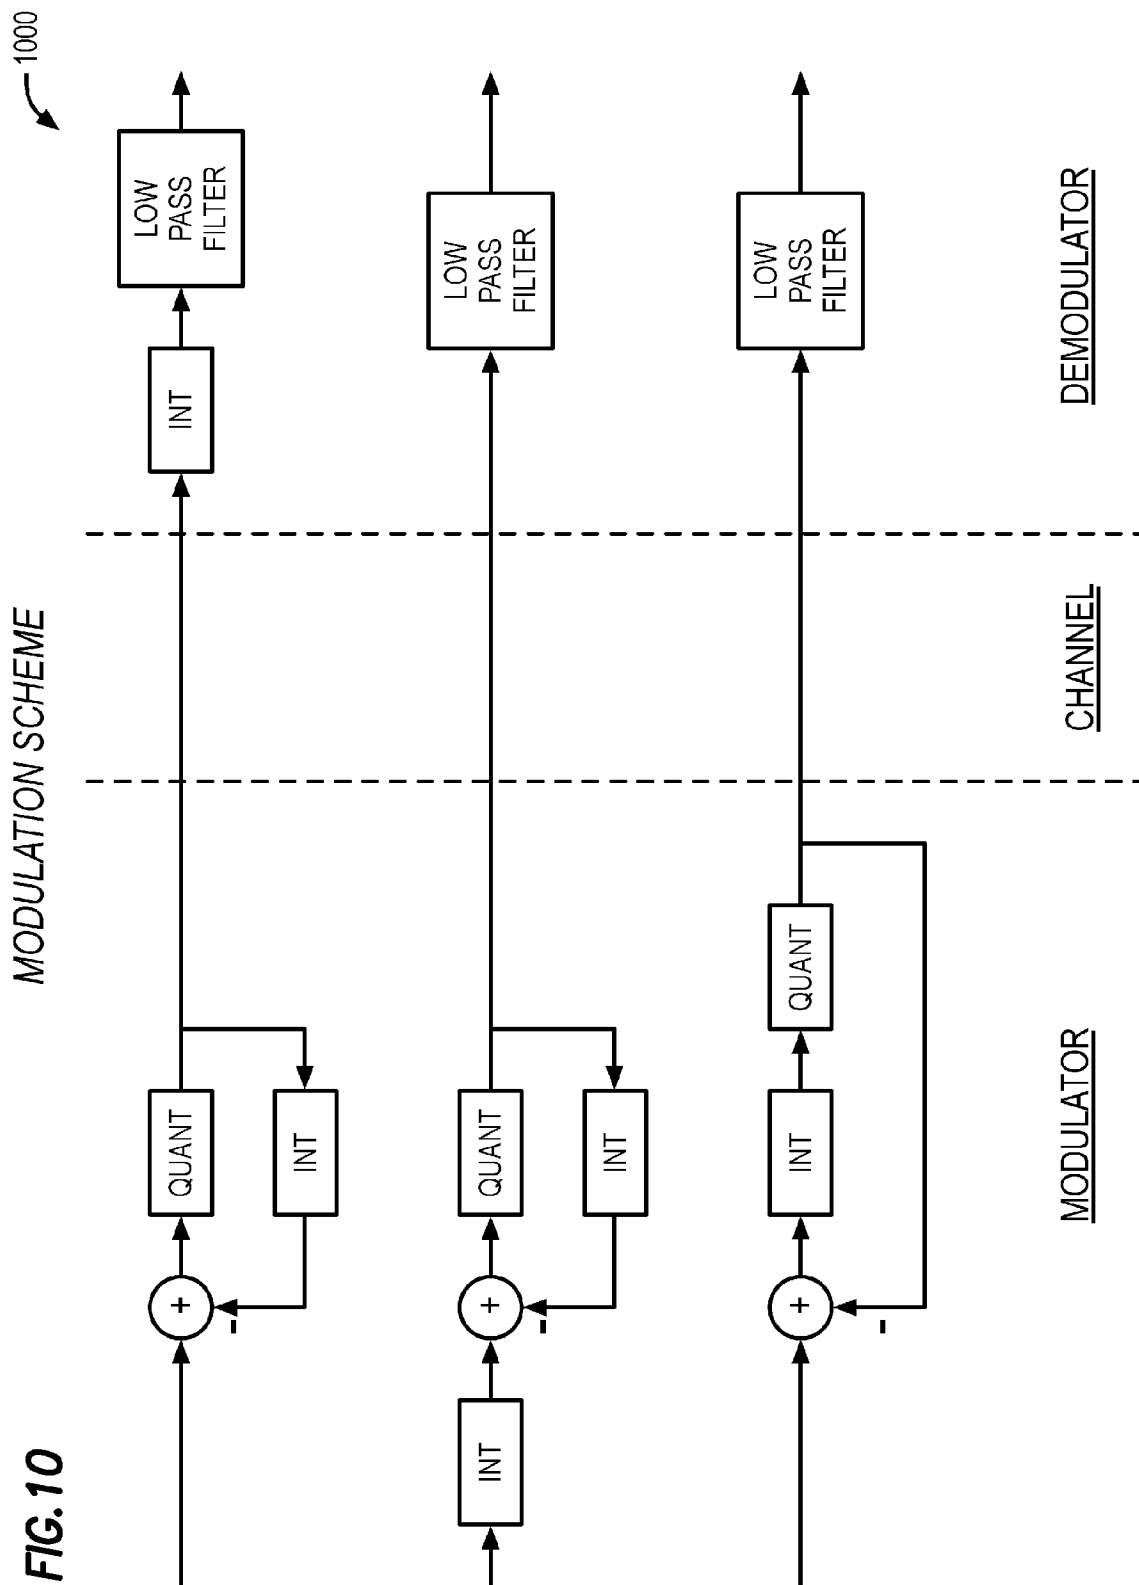

EXEMPLARY DELTA SIGMA MODULATOR

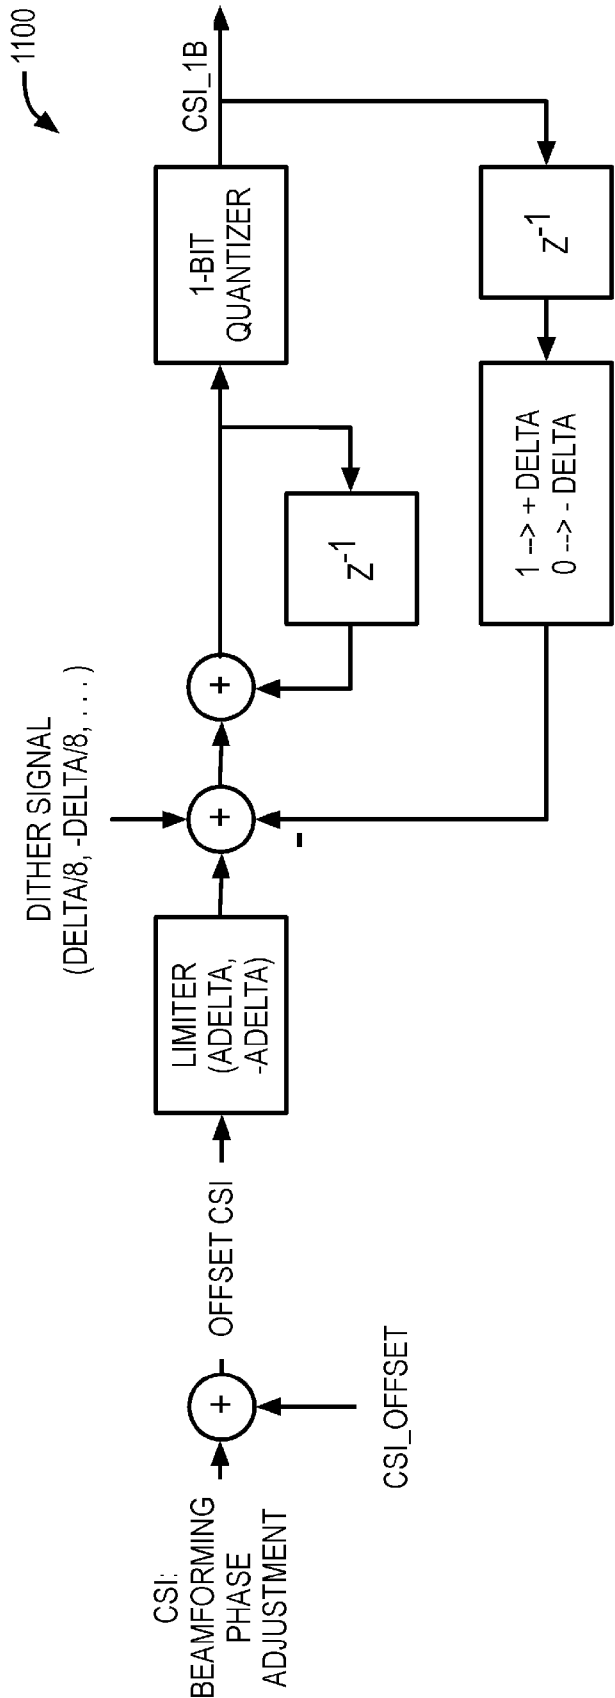


FIG. 11

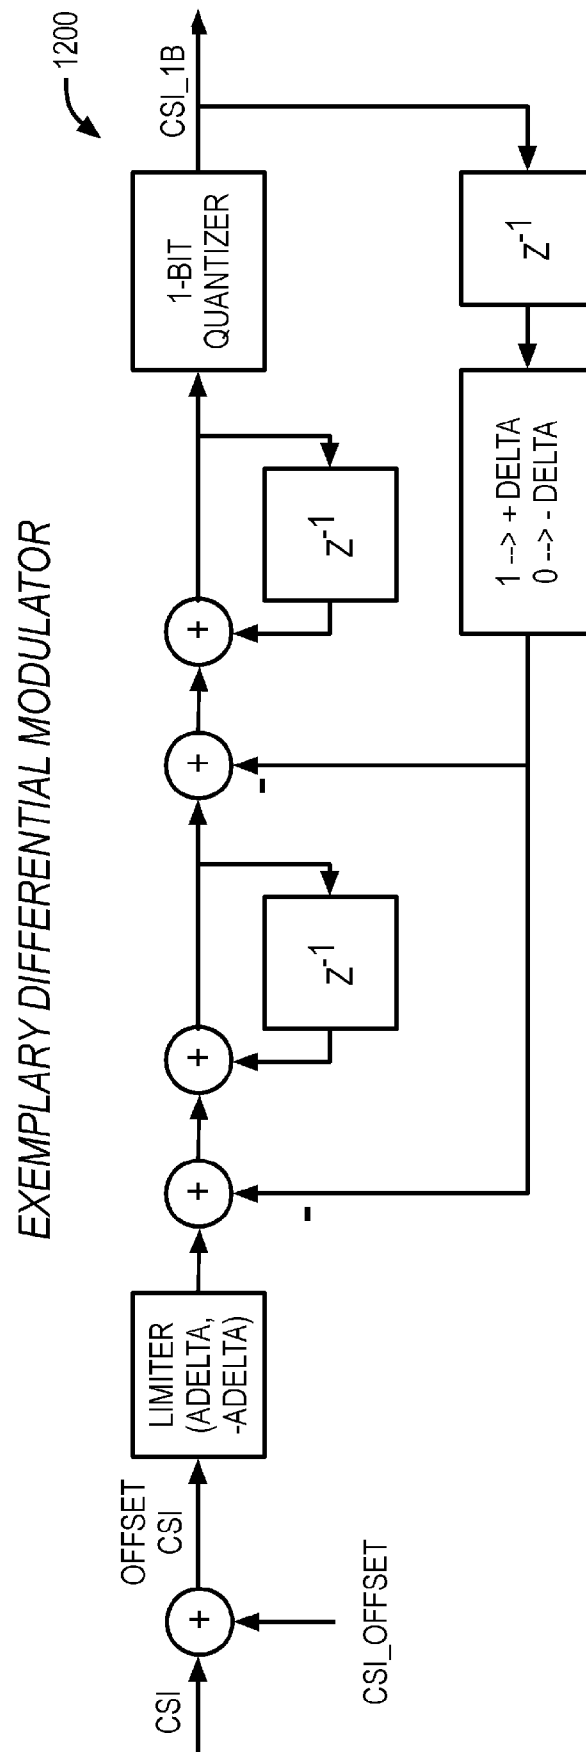


FIG. 12

EXEMPLARY LEAKY DIFFERENTIAL MODULATOR

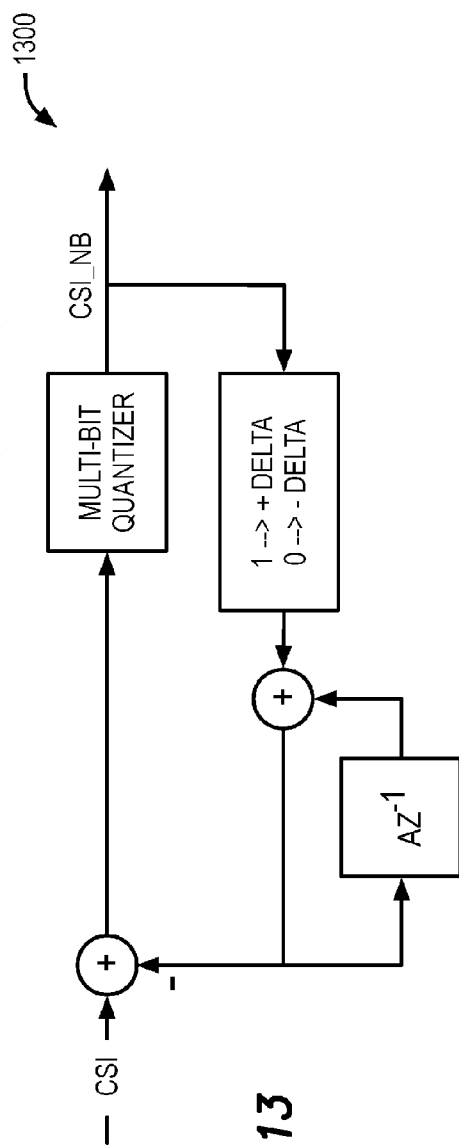


FIG. 13

EXEMPLARY DELTA SIGMA MODULATOR

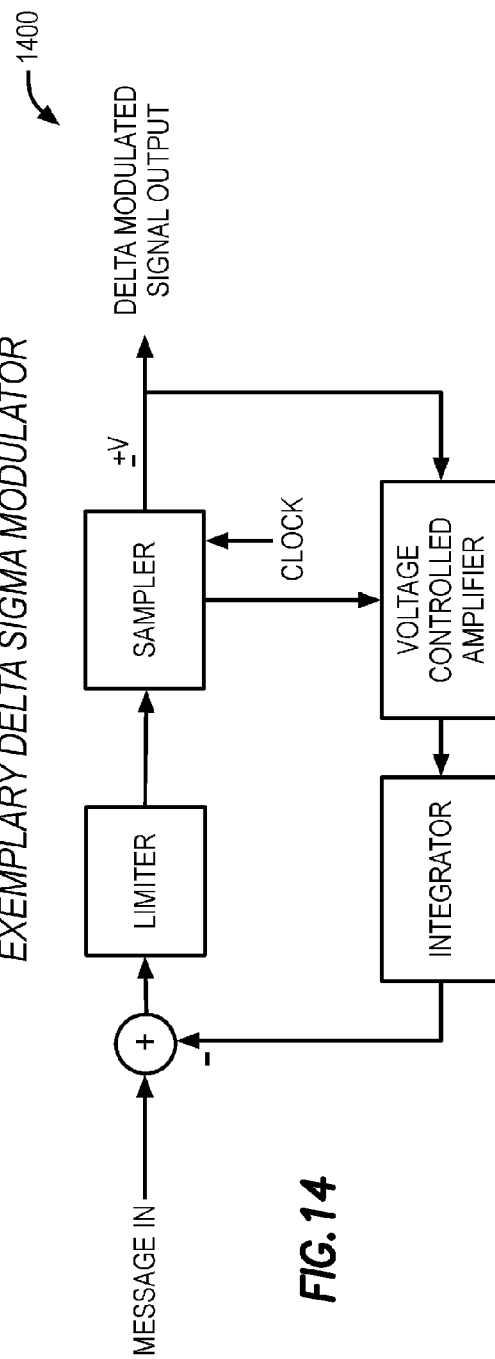


FIG. 14

ACCESS NETWORK SIDE CHANNEL QUANTIZATION

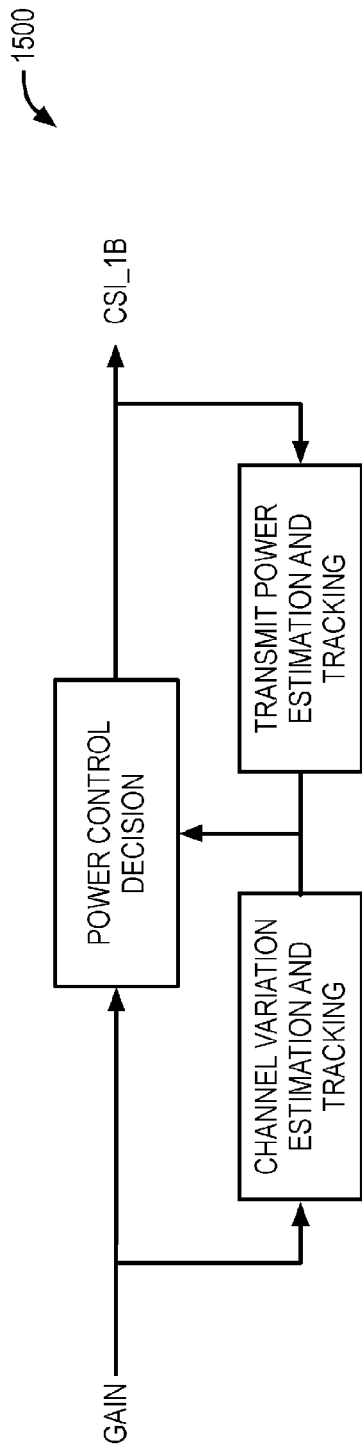


FIG. 15

SIDE CHANNEL QUANTIZATION AND DEQUANTIZATION

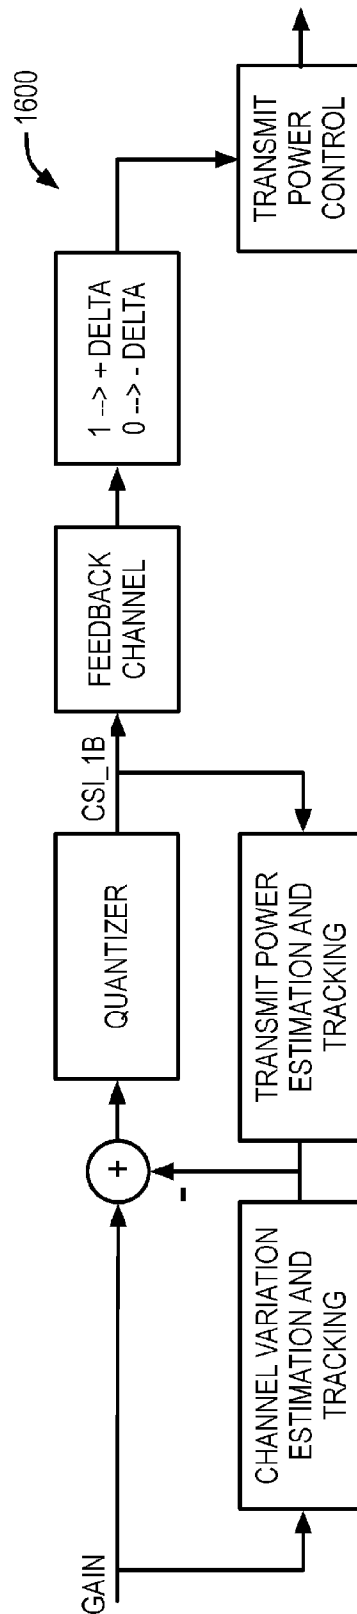


FIG. 16

1700

ACCESS NETWORK SIDE CHANNEL QUANTIZATION

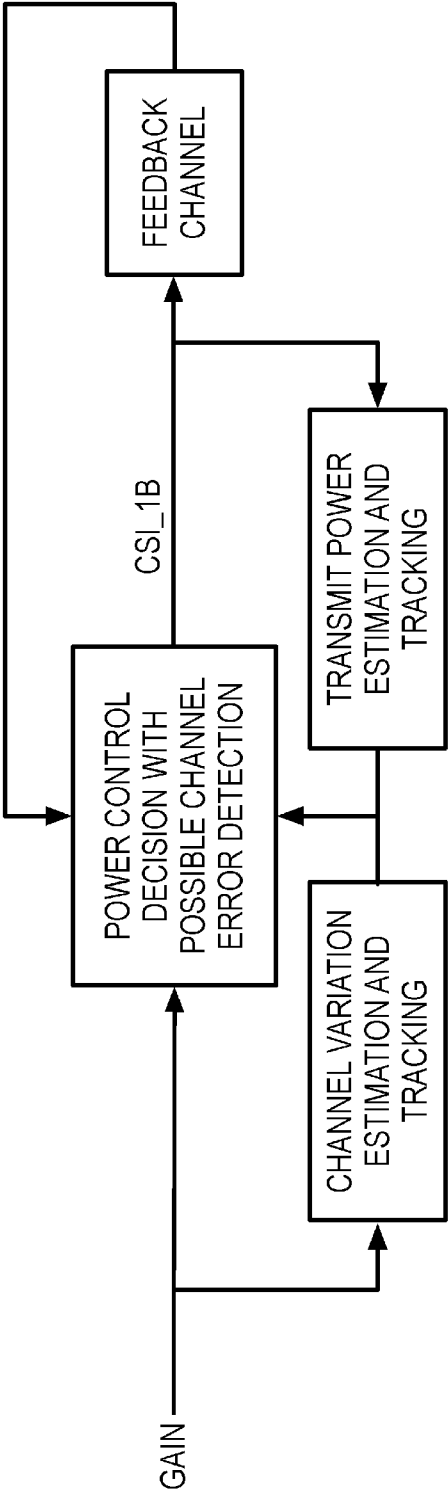


FIG.17

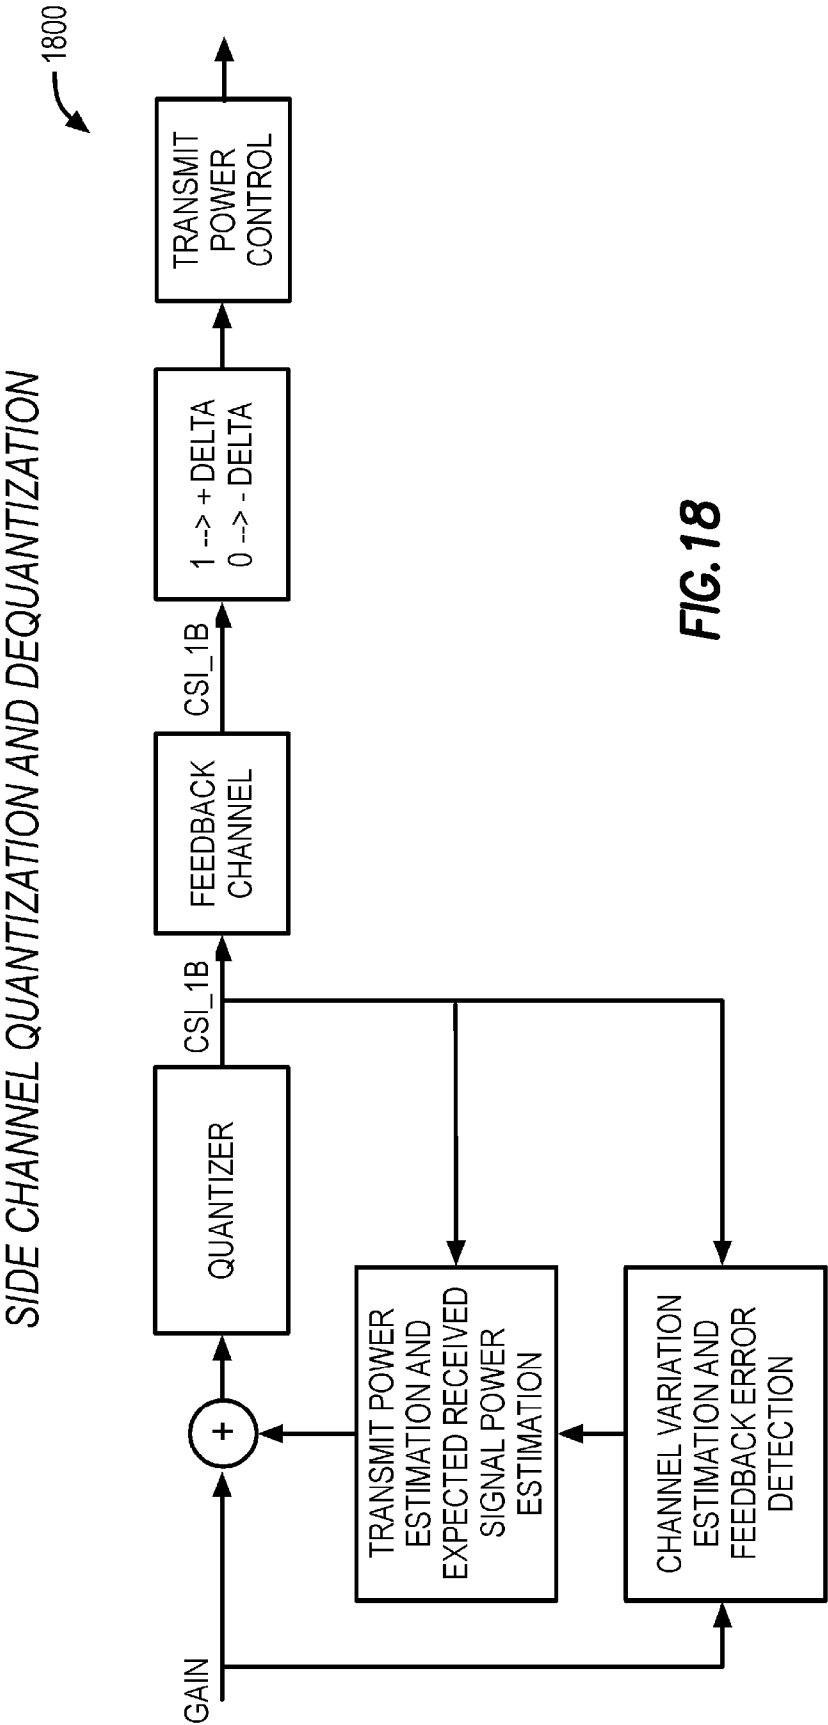


FIG. 18


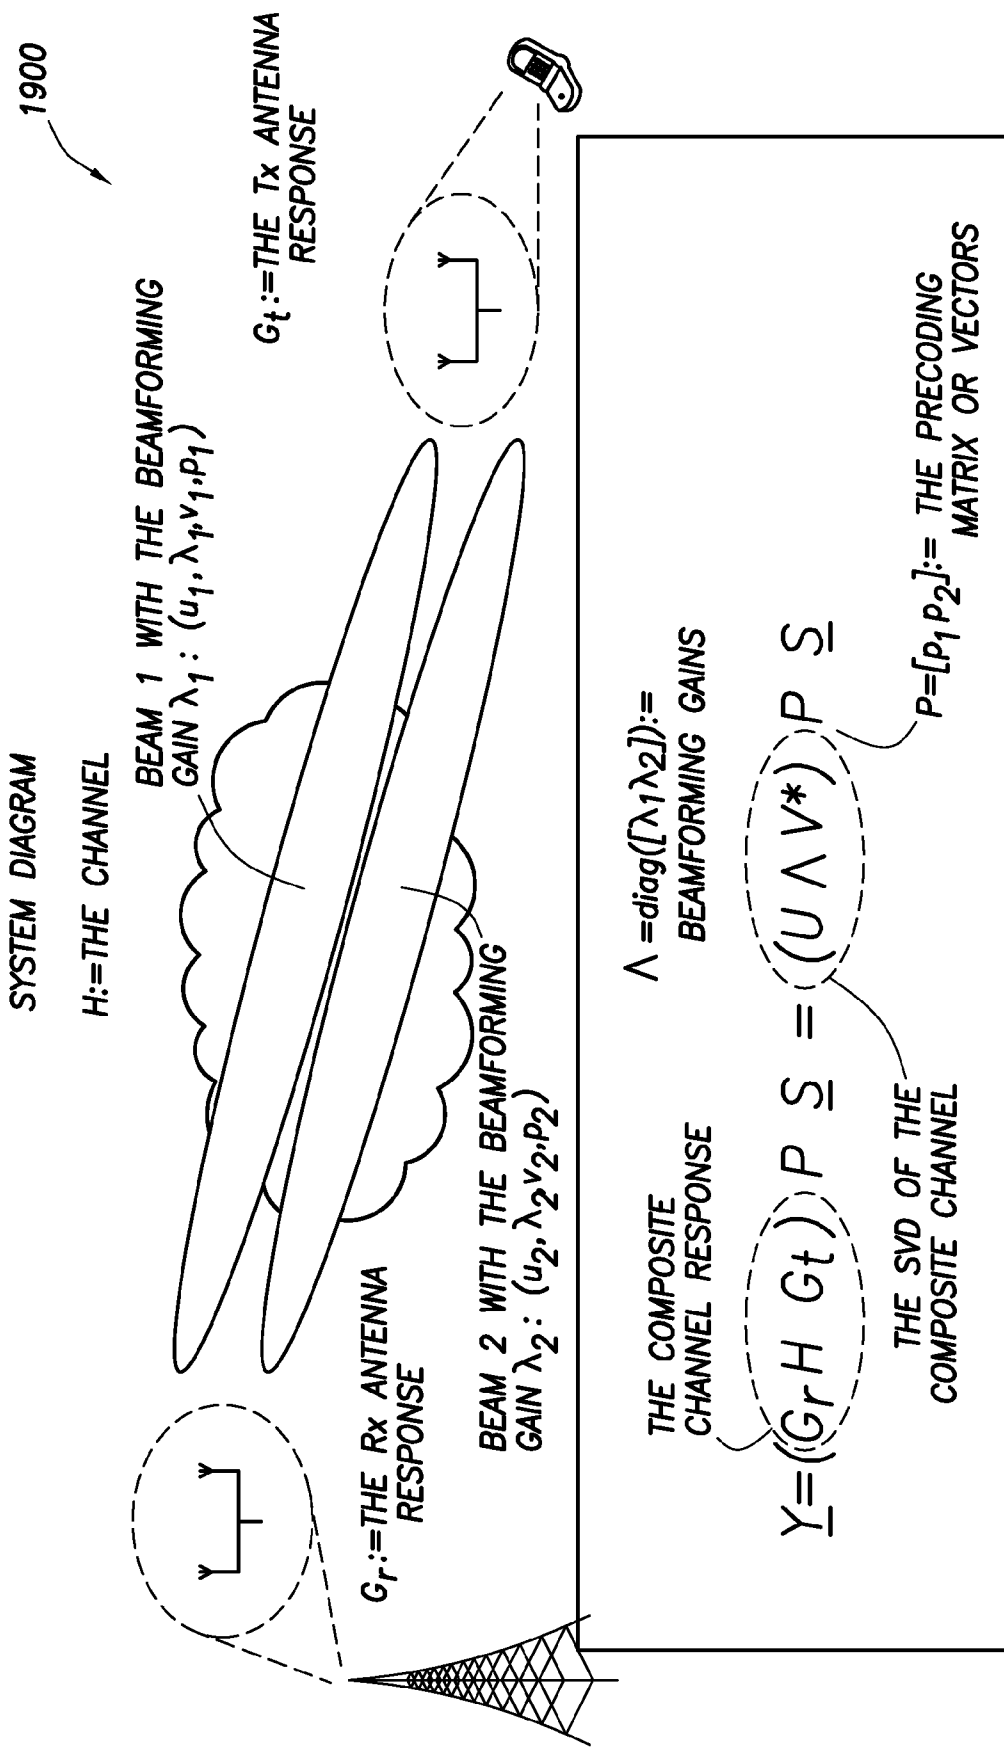


FIG. 19

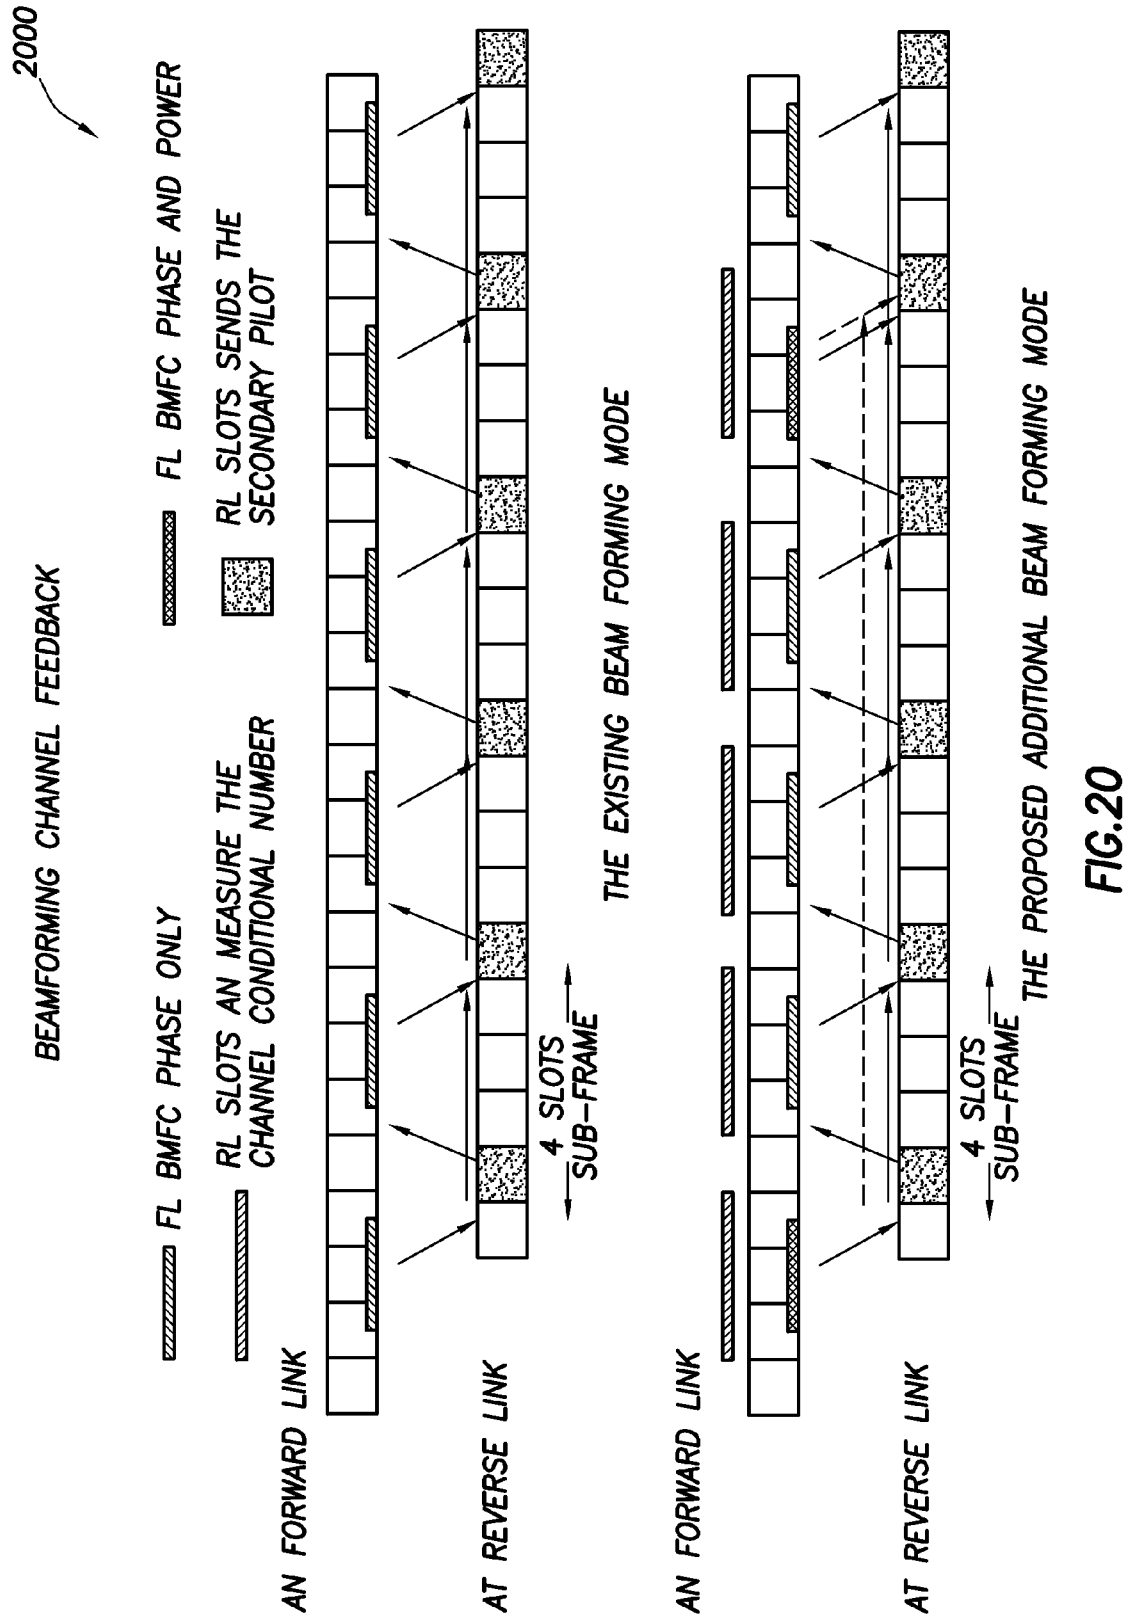

ACCESS NETWORK SIDE CHANNEL QUANTIZATION

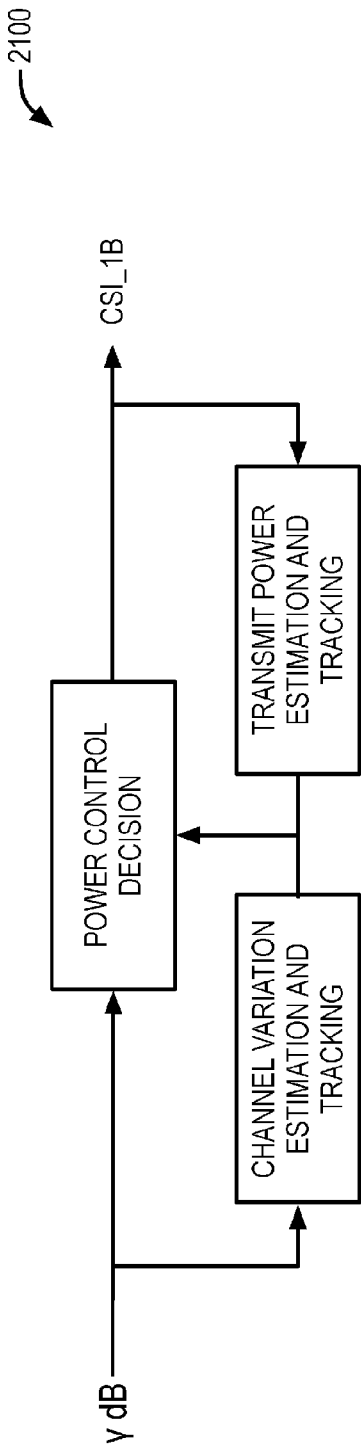


FIG. 21

SIDE CHANNEL QUANTIZATION AND DEQUANTIZATION

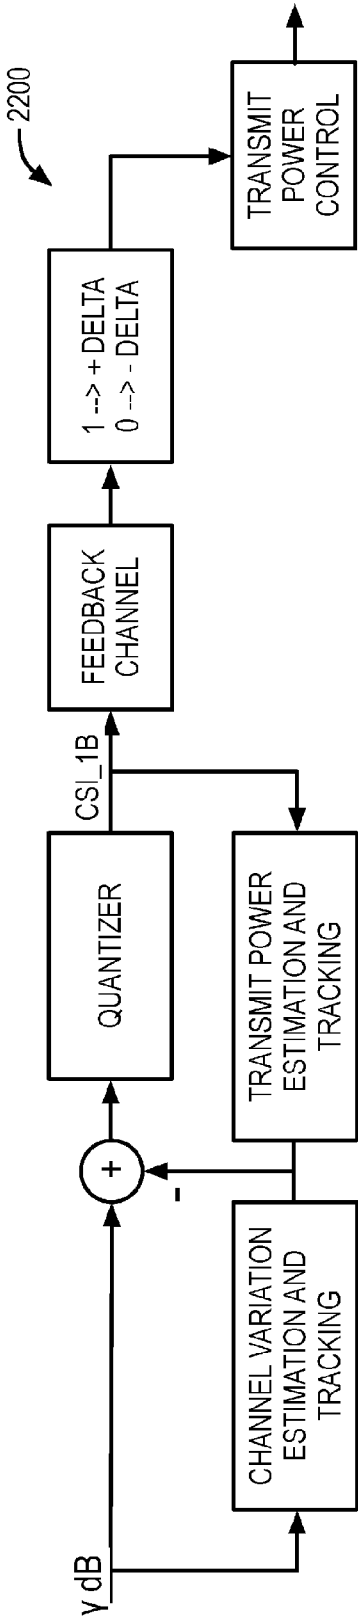


FIG. 22

SIDE CHANNEL QUANTIZATION AND DEQUANTIZATION

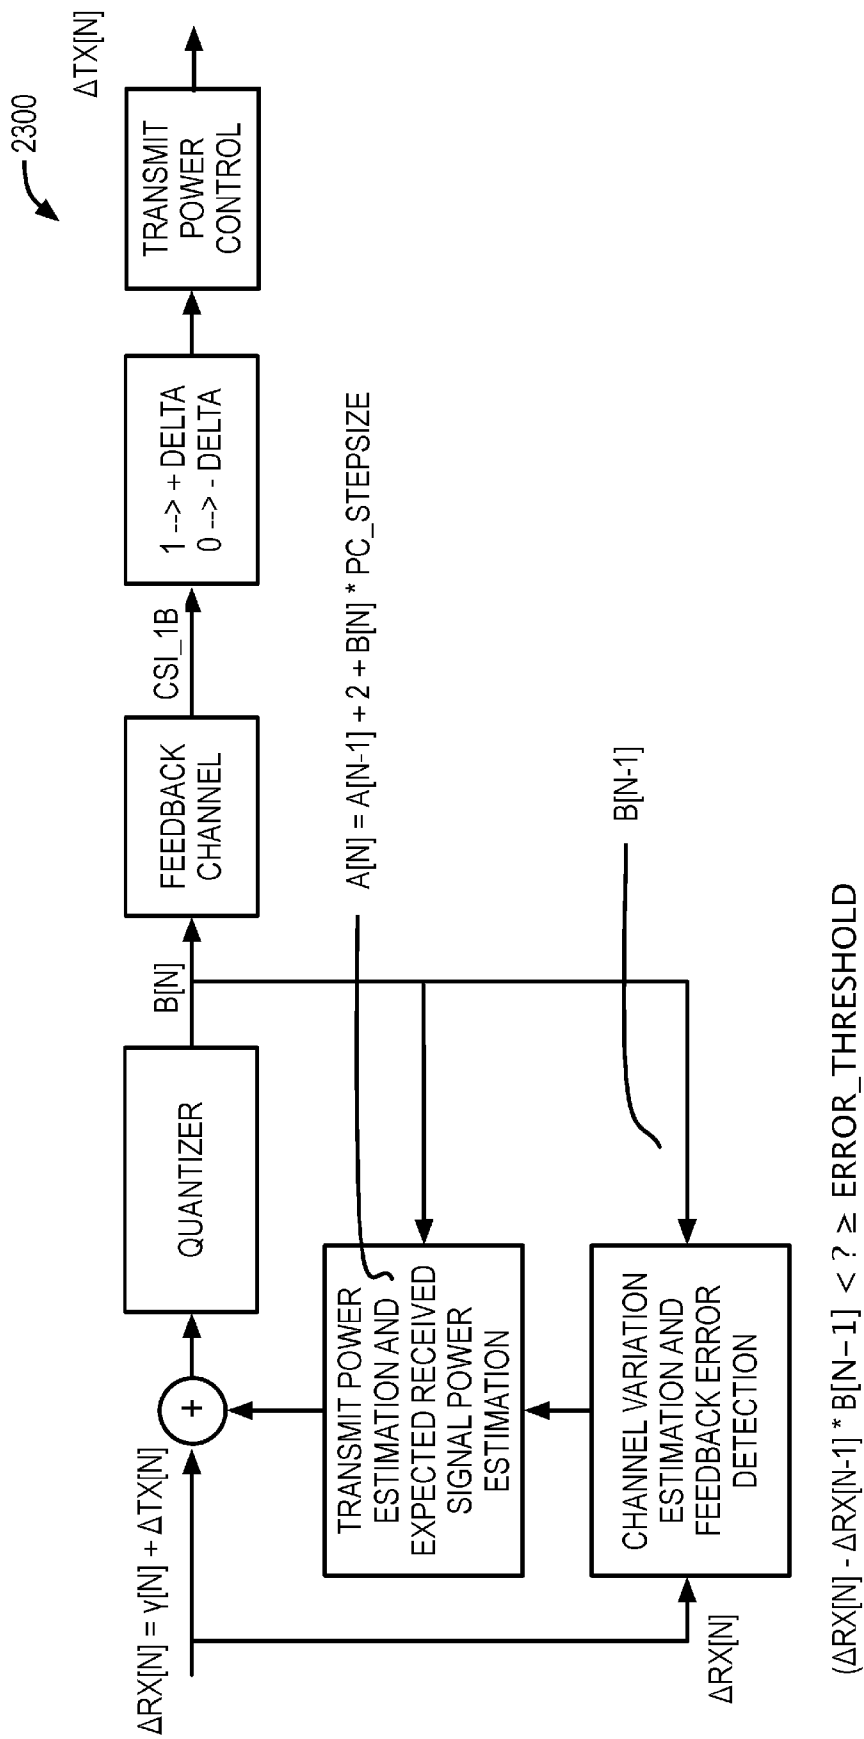


FIG.23

ACCESS NETWORK SIDE CHANNEL QUANTIZATION

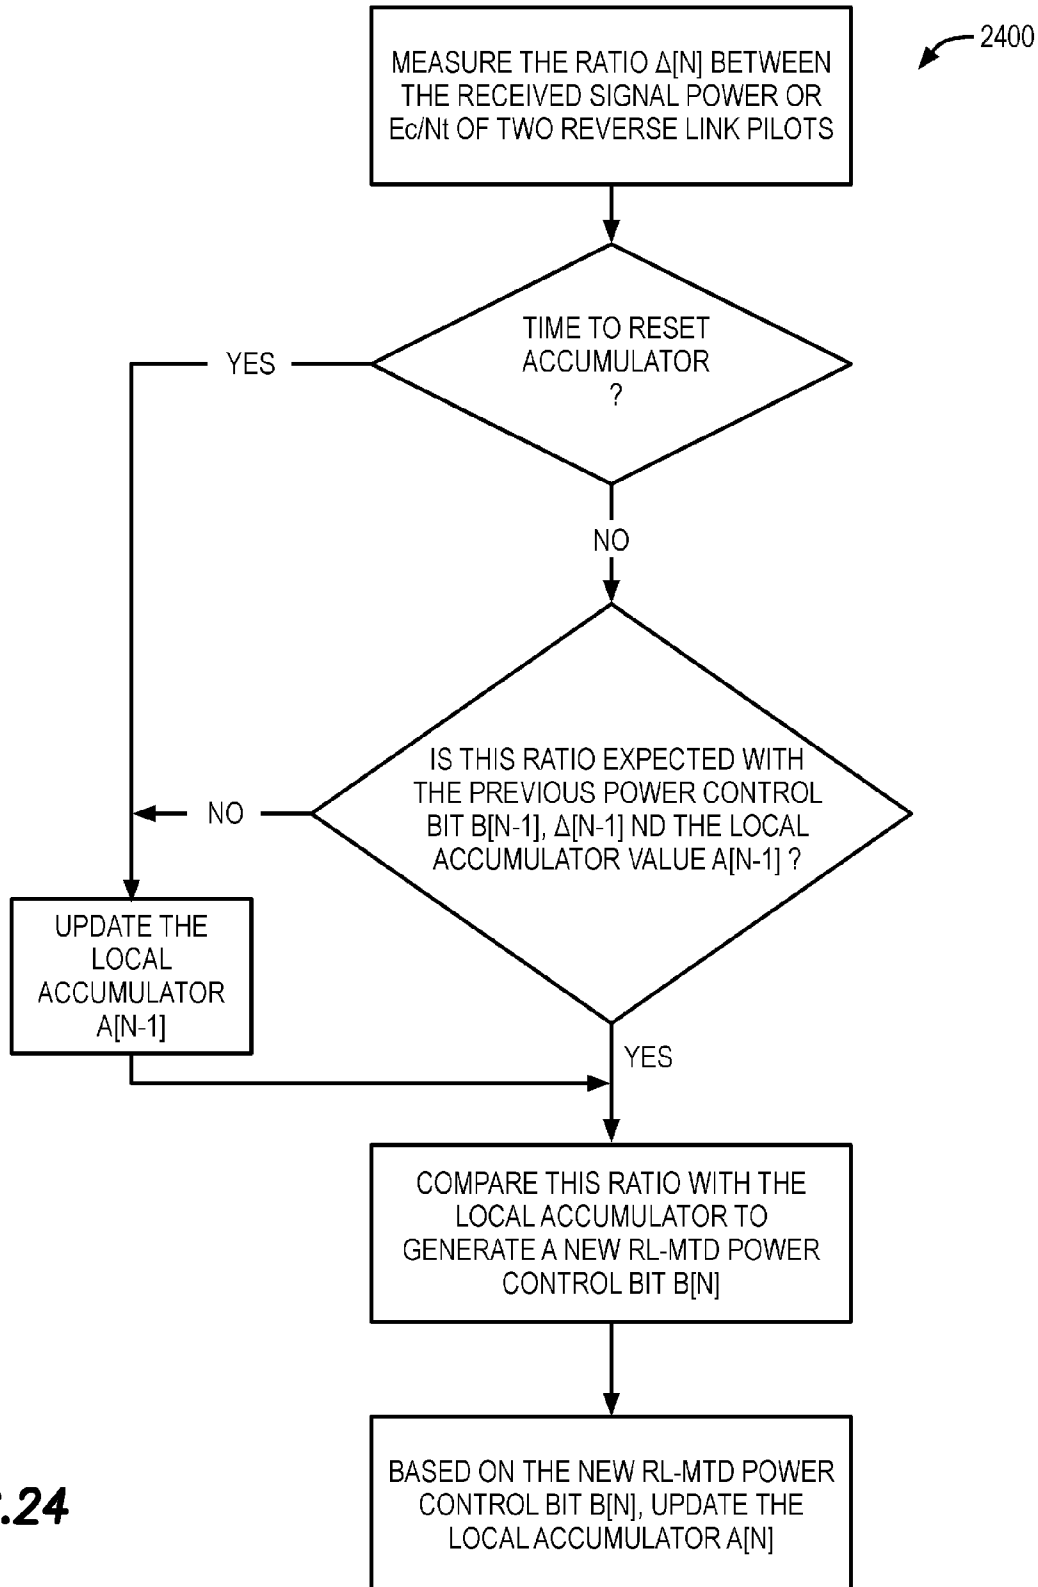


FIG.24

1

REVERSE LINK MOBILE TRANSMIT DIVERSITY

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a continuation of U.S. Nonprovisional application Ser. No. 12/840,473, filed on Jul. 21, 2010, entitled "REVERSE LINK MOBILE TRANSMIT DIVERSITY," having common inventors and a common assignee.

U.S. Nonprovisional application Ser. No. 12/840,473 claims the benefit of the following U.S. Provisional Applications, each of which is herein incorporated by reference for all intents and purposes.

SERIAL NUMBER	FILING DATE	TITLE
61227077 (VTU.09-0043-US)	Jul. 21, 2009	REVERSE LINK MOBILE TRANSMIT DIVERSITY
61235368 (VTU.09-0046-US)	Aug. 20, 2009	REVERSE LINK MOBILE TRANSMIT DIVERSITY
61241029 (VTU.09-0050-US)	Sep. 10, 2009	REVERSE LINK MOBILE TRANSMIT DIVERSITY

BACKGROUND OF THE INVENTION

1. Field of the Invention

This invention relates in general to the field of microelectronics, and more particularly to an apparatus and method for improving the data throughput over a cellular network.

2. Description of the Related Art

The cell phone industry is undergoing exponential growth, not only in this country, but all over the world. In fact, it is well known that the over twenty percent of the adult population in the United States do not even have a traditional landline telephone. In addition to those who do not own a conventional telephone, nearly ninety percent of the adult population owns a wireless phone.

And the usage of cell phones is increasing as well over the use of traditional landline telephone coverage. In fact, one in seven adults now uses only cell phones. Whereas in the past cell phones were used when a landline was not available or under emergency conditions, lower carrier rates, affordability of family packages, and free mobile-to-mobile or friend-to-friend promotions have fostered in significant increases in usage. It is not uncommon today to walk into any public forum or facility and notice a majority of the people there talking on their cell phones.

The ability to communicate using a mobile phone, or mobile station, has been available since the middle of the last century. However, during the 1990's so-called "2G" or second generation mobile phone systems were provided that began the growth in both deployment and usage that we currently enjoy today. These initial systems predominately provided for the routing and reliable servicing of voice calls between parties. And, as one skilled in the art will appreciate, there are a number of timing and latency requirements associated with transmission and reception of voice data in order to maintain quality of service.

And although wireless cellular network technologies have continued to provide improvements related to the ability to process voice calls, there has also been an enormous pull on the industry to provide improvements related to the number of calls and quality of calls that can be processed. One such technique is known as multiple-input multiple-output

2

(MIMO) employs multiple antennas on both mobile stations (i.e., cell phones) and their base stations to achieve these goals. However, the problems inherent in employing single antenna systems are only exacerbated when more than one transmitter/receiver pair is involved.

Accordingly, what is needed is a technique that enables a cellular data network to process increasing amounts of voice and data traffic in a system that utilizes MIMO techniques.

In addition, what is needed is an apparatus and method for a base station, or access network to direct a given cell phone, or access terminal to adjust the relative phase, delay, and/or power that is being transmitted via one or more of a plurality of transmit antennas.

SUMMARY OF THE INVENTION

The present invention, among other applications, is directed to solving the above-noted problems and addresses other problems, disadvantages, and limitations of the prior art.

The present invention provides a superior technique for adjust the relative phase, delay, and/or power that is being transmitted between the access network and the terminal. In one embodiment, the present invention contemplates an apparatus wirelessly coupled to an access network, the apparatus comprising a plurality of communication modules, a receiver and a processor. The plurality of communication modules coupled to the access network and configured to receive a plurality of signals corresponding to the communication modules. The receiver, coupled to the access network and configured to receive an index form the access network which indicates number of the plurality of signals. The processor, configured to adjust the transmitting gain of the apparatus.

One aspect of the present invention contemplates an apparatus for wirelessly coupled to an access terminal, the apparatus comprising a plurality of communication modules, a transmitter and a channel estimator. The plurality of communication modules coupled to the access terminal and configured to transmit a plurality of signals. The transmitter, coupled to the access terminal and configured to send an index which indicates number of the plurality of signals, and channel estimator, configured to generate plurality of signals according to the signals transmitted by the access terminal.

Another aspect of the present invention comprehends a method for an access terminal which is wirelessly coupled to an access network, the method comprising receiving a plurality of signals corresponding to a plurality of communication modules; receiving an index form the access network which indicates number of the plurality of signals; and adjusting the transmitting gain of the apparatus.

One aspect of the present invention also contemplates a method for an access network which is wirelessly coupled to an access terminal, the apparatus comprising transmitting a plurality of signals corresponding to a plurality of communication modules, sending an index which indicates number of the plurality of signals; and adjusting and modulating a channel state information into the plurality of signals.

Finally, present invention also contemplates a wireless communication system, the system comprising an access terminal and an access network. The access terminal, further comprising a plurality of communication modules, a receiver and a processor. The plurality of communication modules, configured to receive a plurality of signals corresponding to the communication modules. The receiver, configured to

receive an index which indicates number of the plurality of signals. The processor, configured to adjust the transmitting gain of the apparatus.

The access network, wireless coupled to the access terminal, the access work comprising a plurality of communication modules, a transmitter and a channel estimator. The plurality of communication modules coupled to the access terminal and configured to transmit the plurality of signals. The transmitter, configured to send the index which indicates number of the plurality of signals. The channel estimator, configured to adjust and modulate a channel state information into the plurality of signals.

BRIEF DESCRIPTION OF THE DRAWINGS

These and other objects, features, and advantages of the present invention will become better understood with regard to the following description, and accompanying drawings where:

FIG. 1 is a block diagram illustrating a reverse link beamforming technique according to the present invention;

FIG. 2 is a flow diagram depicting a direction modulation method according to the present invention;

FIG. 3 is a block diagram featuring a differential modulation mechanism according to the present invention;

FIG. 4 is a block diagram showing how beamforming channel feedback is employed within slots of both forward and reverse links;

FIG. 5 is a block diagram illustrating an exemplary feedback modulation mechanism according to the present invention;

FIG. 6 is a block diagram detailing an alternative exemplary feedback modulation mechanism according to the present invention;

FIG. 7 is a block diagram illustrating an exemplary delta modulator according to the present invention;

FIG. 8 is a block diagram highlighting another an exemplary delta modulator according to the present invention;

FIG. 9 is a block diagram showing yet another an exemplary delta modulator according to the present invention;

FIG. 10 is a block diagram featuring a modulation scheme according to the present invention for providing reverse link mobile transmit diversity;

FIG. 11 is a diagram illustrating an exemplary delta sigma modulator according to the present invention;

FIG. 12 is a diagram showing an exemplary differential modulator according to the present invention;

FIG. 13 is a diagram featuring an exemplary leaky differential modulator according to the present invention;

FIG. 14 is a diagram detailing an exemplary delta sigma modulator according to the present invention;

FIG. 15 is a diagram showing a flow for access network side channel quantization according to the present invention;

FIG. 16 is a block diagram highlighting a flow for access terminal side channel quantization according to the present invention;

FIG. 17 is a diagram featuring a flow for access network side channel quantization according to the present invention;

FIG. 18 is a block diagram illustrating a flow for access terminal side channel quantization according to the present invention;

FIG. 19 is a block diagram showing a system according to the present invention;

FIG. 20 is a block diagram showing a slot structure for beamforming channel feedback according to the present invention;

FIG. 21 is a block diagram illustrating a flow for access network side channel quantization according to the present invention;

FIG. 22 is a block diagram showing a flow for access terminal side channel quantization according to the present invention;

FIG. 23 is a block diagram illustrating A flow for side channel quantization and dequantization according to the present invention; and

FIG. 24 is a flow diagram illustrating a reverse link beamforming method according to the present invention.

DETAILED DESCRIPTION

The following description is presented to enable one of ordinary skill in the art to make and use the present invention as provided within the context of a particular application and its requirements. Various modifications to the preferred embodiment will, however, be apparent to one skilled in the art, and the general principles defined herein may be applied to other embodiments. Therefore, the present invention is not intended to be limited to the particular embodiments shown and described herein, but is to be accorded the widest scope consistent with the principles and novel features herein disclosed.

In view of the above background discussion on cellular communications and the problems inherent, a discussion of the present invention will now be presented with reference to FIGS. 1-24.

Turning to FIG. 1, a block diagram 100 is presented illustrating a reverse link beamforming technique according to the present invention. According to the present invention, a new reverse link (RL) beamforming feedback architecture is provided for implementing mobile transmit diversity. Three feedback modes are proposed. A first mode contemplates adjustment of a single parameter. The single parameter can be delay, phase, or transmit (TX) power. A second mode comprehends a 2-parameter adjustment, where the 2-parameter adjustment is one of the following parameter pairs: (1) delay and phase; (2) delay and TX power; and (3) phase and TX power. A third mode considers a TDFC (time domain fading channel) which contains phase, delay, and TX power adjustment information.

In each of the three modes noted above, delta modulation is employed for generating a feedback channel. In one embodiment, the delta modulation comprises differential modulation. In another embodiment, the delta modulation comprises delta sigma modulation. When more than one parameter is fed back from a receiver to a transmitter, these parameters can be sent either in the one symbol or media access channel (MAC) transmission or separately in multiple MAC transmissions. According to the present invention, the mode that is utilized to implement mobile transmit diversity is based upon on capability of a particular access terminal (AT, i.e., a mobile cellular device) and upper layer message negotiation and registration of the AT. In one embodiment, delta sigma modulation is employed for encoding feedback phases and amplitudes.

The diagram 100 shows an AT 101, receiving a primary pilot signal, data, overhead, and a secondary pilot. The receiving a primary pilot signal, data, and overhead are summed in summer 103, and the result is provided along with the secondary pilot to a beamforming element 104. The beamforming element 104 adjusts the parameters noted above for transmission over a plurality of transmit antennas 105 to an access network 111 (AN, i.e., a base station). The transmissions

5

from each of the transmit antennas **105** will each have differing delay, phase rotation, and channel gain.

A plurality of receive antennas **112** at the AN **111** provide received signals to a multiple input multiple output (MIMO) channel estimation element **113**, the result of which is provided to an AT beamforming index computation and selection element **114**. An output of the AT beamforming index computation and selection element **114** is routed to a TX beamforming index using assigned forward link (FL) MAC index element **115**, which generated feedback from the AN to the AT, as will be described in more detail herein below.

As one skilled in the art will appreciate, RL beamforming is a technique employed to control the phase (i.e., the delay) and relative amplitude of the signal at the mobile transmitter. Control of relative amplitude is an optional feature according to the present invention. In one aspect RL beamforming is analogous to an opposite of the mechanisms employed by rake receivers and associated equalization receiver techniques employed in the AN. Thus, RL beamforming provides the benefits of improved link-budget, increase sector capacity, and enhanced user experience.

In one embodiment, the phase estimation resolution is approximate to the level of angle spread of given AN, which as one skilled will appreciate, ranges from 2 to 10 degrees dependent upon the particular channel model employed (e.g., urban macrocell, suburban macrocell, urban microcell, indoor hotspot, etc.). Accordingly, the desired beamforming phase estimation resolution is approximately $\frac{1}{8}\pi$ or higher. In addition, antenna gain differentiation information should be approximate to the level of shadowing factor, which varies from roughly 1 decibel (dB) to 8 dB depending upon the channel model. In one embodiment, plus or minus 6 dB or finer resolution is desired.

Turning to FIG. 2, a flow diagram **200** is presented depicting a direction modulation method according to the present invention. The method includes estimating a current phase **201**, then quantizing **202**. The estimating **201** includes using one antenna as a reference and calculating the phase difference between two antennas as the current phase. The quantization **202** includes mapping the analog current phase into, for example, two bits.

Referring to FIG. 3, a flow diagram **300** is presented showing a method for differential modulation. According to the present invention. The method comprises estimating a current phase **301** at time T, estimating an expected phase **302** during a next interval P(T+1). The method also includes employing a summer **303** to sum the two phases, and then quantizing the sum **304**. The estimating current phase **301** includes using one antenna as a reference and calculating the phase difference between two antennas as the current phase. The estimating expected phase **302** includes calculating the expected phase at time T+1 based on beamforming criteria. The quantization **303** includes mapping the analog current phase into, for example, two bits.

FIG. 4 is a block diagram **400** showing how beamforming channel feedback is employed within slots of both a forward link **401** and reverse link **402** according to the present invention. As one skilled in the art will appreciate, transmissions over the forward link (FL) **401** and reverse link (RL) **402** are divided into a sequence of slots **403**. In one embodiment, a beamforming feedback channel (BMFC) is transmitted in the FL **401** for one or two slots **403** for every four slots **403** that are transmitted. The BMFC slot transmission is depicted via a "B." Although the diagram **400** depicts a 2-slot BMFC transmission, a single-slot BMFC configuration is contemplated. In the RL **402**, a secondary pilot S is transmitted every sub-frame, which is four slots **403** in length. Thus, the BMFC

6

transmitted over the FL in a particular sub-frame is employed by the AT to adjust parameters for mobile diversity transmission during a following sub-frame over the RL **402**. In one embodiment, the BMFC is transmitted using an additional FL MAC index. An AT is operating in closed loop multiple transmitter diversity (CL-MTD) mode is assigned an additional FL MAC index to provide for BMFC. It is contemplated that performance is roughly the same as that of reverse power control (RPC) channel.

As alluded to above, three modes of BMFC are contemplated according to the present invention. The first mode contemplates adjustment of a single parameter. The single parameter can be delay, phase, or transmit (TX) power. According, the single-parameter mode employs one bit to feedback either delay, phase, or TX power using delta modulation. The second mode comprehends a 2-parameter adjustment, where the 2-parameter adjustment is one of the following parameter pairs: (1) delay and phase; (2) delay and TX power; and (3) phase and TX power. Thus, the 2-parameter mode employs two bits per feedback with one bit providing feedback for each parameter, and the mode uses delta modulation as the modulation technique. The third mode considers a TDFC which contains phase, delay, and TX power adjustment information. This mode employs three bits for feedback with one bit for each parameter, and also employs delta modulation as the modulation technique. In the 2-parameter and 3-parameter modes, the feedback bits can either be sent simultaneously or alternately. The phase and power information is encoded and decoded via delta sigma modulation.

Referring to FIG. 5, a block diagram is presented illustrating an exemplary feedback modulation mechanism **500** according to the present invention. The mechanism **500** includes estimating a current phase **501** at time T. The current phase CSI is estimated by taking one antenna as a reference and calculating the phase difference between two antennas. The mechanism **500** also takes the current phase CSI and encodes it according to delta modulation **502**. The delta modulation can be any of a number of known delta modulation techniques to include direct (or "simple") delta modulation, delta sigma modulation, adaptive delta modulation, leaky delta modulation, etc.

FIG. 6 is a block diagram detailing an alternative exemplary feedback modulation mechanism **600** according to the present invention. The mechanism **600** comprises estimating a current phase **601** at time T and estimating an expected phase **602** at time T+1. The estimating the current phase **601** includes taking one antenna as a reference and calculating the phase difference between two antennas. The estimating the expected phase **602** includes calculating the expected phase at time T+1 based on beamforming criteria. The current phase and expected phase are summed at summer **603** and provided to a delta modulation element **604** for encoding. The delta modulation can be any of a number of known delta modulation techniques to include direct (or "simple") delta modulation, delta sigma modulation, adaptive delta modulation, leaky delta modulation, etc.

FIG. 7 is a block diagram illustrating an exemplary delta modulator **700** according to the present invention. The modulator **700** employs a configuration of adders ("+"), a 1-bit quantizer, unit delay elements (Z^{-1}), and delta decoder that interprets a 1 as a plus delta and a 0 as a minus delta, arranged substantially as shown.

FIG. 8 is a block diagram illustrating another exemplary delta modulator **800** according to the present invention. The modulator **800** employs a configuration of adders ("+"), a 1-bit quantizer, unit delay elements (Z^{-1}), and delta decoder

7

that interprets a 1 as a plus delta and a 0 as a minus delta, arranged substantially as shown.

FIG. 9 is a block diagram showing yet another exemplary delta modulator **900** according to the present invention. The modulator **900** employs a configuration of adders (“+”), a multi-bit quantizer, a unit delay element (Z^{-1}), and delta decoder that interprets a 1 as a plus delta and a 0 as a minus delta, arranged substantially as shown.

As one skilled in the art will appreciate, delta sigma modulation (DSM) is a method for encoding high resolution signals into lower resolution signals using pulse density modulation (PDM). This technique has been increasingly used in designing analog to digital converters, digital to analog converters, frequency synthesizers, switched-mode power supplies, motor controls, and etc.

Both DSM and direct delta modulation (DM) are variations of delta modulation. Rather than quantizing the absolute value of an input analog waveform, delta modulation quantizes the difference between the current and the previous step. DM is the simplest form of differential pulse code modulation (DPCM). The difference between successive samples is encoded into n-bit data streams. According to the present invention, step size is either fixed to be a smaller value like $\frac{1}{8}\pi$ or $\frac{1}{16}\pi$, $< 2\pi/2^n$, where n is the number of coding bits. Alternatively, step size may be adaptive depending on various performance criteria. One criteria, for example, considers the value of inputs. The principle of using DSM is to make rough evaluations of a signal, to measure error, to, integrate the error, and then compensate for that error. In one aspect, quantization contemplates both a 1-bit quantizer, as shown in FIGS. 7 and 8, or a multi-bit quantizer as shown in FIG. 9.

Referring now to FIG. 10, a block diagram **1000** is presented featuring a modulation scheme according to the present invention for providing reverse link mobile transmit diversity. The diagram **1000** shows modulation elements within a modulator and demodulation elements within a demodulator, arranged substantially as shown. The modulation elements include summers (“+”), integrators (“INT”), quantizers (“QUANT”), and low pass filters, arranged substantially as shown. As one skilled in the art will appreciate, DSM can be deviated from DM, if the quantization is linear. This deviation is shown in the diagram **1000**. Thus, the linearity property of integration makes it possible to move the integrator INT in the demodulator section into front of the modulator. The linearity property of the integration allows the two integrators INT in the modulator to be combined to generate a DSM. The difference between DSM and DM is the position of the integrator INT and quantizer QUANT. Therefore, DSM has a simpler implementation that has the added benefit of shaping/filtering the quantization noise away from signals of interest. The quantized value is the integral of the difference signal, which makes it less sensitive to the rate of change of the signal.

FIG. 11 is a diagram illustrating an exemplary delta sigma modulator **1100** according to the present invention. The modulator **1100** includes summers (“+”), a 1-bit quantizer, unit delay elements (“ Z^{-1} ”) a limiter, and a bit interpreter (“1→+DELTA”) arranged substantially as shown.

The exemplary modulator **1100** is easily implemented and yet meets the system requirements noted above. Accordingly, an offset and limiter are applied to a CSI input. A CSI_Offset is used to move the CSI dynamic range within the range required modulator **1100**. The limiter is included to prevent overflow. The input level is often less than the quantizer step size and hence is denoted by ADELTA (i.e., A times DELTA) where A is less than 1 dependent on DSM type. A dither signal is also applied to the 1st-order DSM input to eliminate the

8

limit cycle inherent in the 1st-order modulators and is a sequence ($\Delta/8, -\Delta/8$). To maximize the signal to noise ratio (SNR) and minimize the delay, an nth-order infinite impulse response (IIR) filter is used to evaluate the performance. The IIR filter consists of n identical one-pole filters with the transfer function defined as follows:

$$H(z) = \left(\frac{1-a}{1-az^{-1}} \right)^n$$

FIG. 12 is a diagram showing an exemplary differential modulator **1200** according to the present invention. The modulator **1200** includes summers (“+”), a 1-bit quantizer, unit delay elements (“ Z^{-1} ”) a limiter, and a bit interpreter (“1→+DELTA”) arranged substantially as shown.

FIG. 13 is a diagram featuring an exemplary leaky differential modulator **1300** according to the present invention. The modulator **1300** includes summers (“+”), a multi-bit quantizer, a limiting unit delay element (“ AZ^{-1} ”) a limiter, and a bit interpreter (“1→+DELTA”) arranged substantially as shown. The parameter A is used to control the convergence and modulation error. It can be predefined or configured through upper layer messaging. Although quantization is shown as multi-bit, it can be 1-bit as well.

FIG. 14 is a diagram detailing an exemplary adaptive delta sigma modulator **1400** according to the present invention which exhibits adaptive features. The adaptive delta modulator **1400** includes a summer, a limiter, a sampler, a voltage controlled amplifier, and an integrator configured substantially as shown.

Continuously variable slope delta modulation (CVSDM) (or “adaptive delta modulation” (ADM)) is a differential method exhibiting a variable step size. CVSDM encodes at 1-bit or multiple bits per sample. The encoder maintains a reference sample and a step size. Each input sample is compared to the reference sample. If the input sample is larger, the encoder emits a 1 bit and adds the step size to the reference sample. If the input sample is smaller, the encoder emits a 0 bit and subtracts the step size from the reference sample. The encoder also keeps the previous N bits of output (N=3 or N=4 are very common) to determine adjustments to the step size. If the previous N bits are all 1s or 0s, the step size is doubled. Otherwise, the step size is halved. The step size is adjusted for every input sample processed.

A CVSDM decoder (not shown) reverses this process, starting with the reference sample, and adding or subtracting the step size according to the bit stream. The sequence of adjusted reference samples are the reconstructed waveform, and the step size is doubled or halved according to the same all-1s-or-0s logic as is employed in the modulator **1400**.

Adaptation of step size allows one to avoid slope overload (step of quantization increases when the signal rapidly changes) and decreases granular noise when the signal is constant (decrease of step of quantization). CVSDM is sometimes employed as a compromise to balance simplicity of implementation, low bit rate, and quality.

FIG. 15 is a diagram **1500** showing a flow for access network side channel quantization according to the present invention. A gain signal is provided to a power decision control element and a channel variation estimation and tracking element. The power decision control element generates a single-bit CSI signal, which is fed back to a transmit power estimation and tracking element. The outputs of the channel variation estimation and tracking element and the transmit power estimation and tracking element are provided to the

9

power control decision element. To support beamforming feedback for transmit power (gain) adjustment, the present invention contemplates antenna gain differentiation information approximately similar to shadowing factor level. Thus, plus or minus 0.5 dB or finer resolution is desired. The gain signal is derived, in one embodiment as follows:

$$\text{GAIN} = \text{ABS}(\text{DELTA2}/\text{DELTA1})\text{dB}$$

FIG. 16 is a block diagram highlighting a flow 1600 for access terminal side channel quantization according to the present invention. In addition to the access network flow elements, the flow 1600 of FIG. 16 also shows a feedback channel element producing a CSI signal at the access terminal, which is provided to an interpreter ("1→+DELTA"), thus passing the interpreted gain adjustment to a transmit power control element.

In one embodiment, the transmit power difference is equal to the channel response gain difference between two AT TX antennas/pilots: $\Delta_p[n] \approx \Delta_h[n]$, where Δ is equivalent to DELTA:

- Δ :=Power control step size, which is 0.5 dB in the following example;
- $\Delta_h[n]$:=The channel response/gain difference between two AT TX antennas;
- $\Delta_p[n]$:=The TX power difference between two AT TX antennas; and
- $\tilde{\Delta}_{p+h}[n] = \tilde{\Delta}_{p+h}[n-1] + 2b[n-1]\Delta$:=Predicted received power difference from two AT TX antennas or pilots.

step	$\Delta_h[n]$	$\Delta_p[n]$	$\Delta_{p+h}[n]$	$\tilde{\Delta}_{p+h}[n-1] + 2b[n-1]\Delta$	$\tilde{\Delta}_{p+h}[n-1] - b[n-1]\Delta$	$b[n]$	$\Delta_p[n]$
0	0	0	0				
1	0	0	0	0	0	+1	0.5
2	0	0.5	0.5	1.0	-1.0	-1	0
3	0	0	0	0	0.5	+1	0.5
4	0	0.5	0.5	1.0	-1.0	-1	0
5	0	0	0	0	0.5	+1	0.5
6	0	0.5	0.5	1.0	-1.0	-1	0
7	0	0	0	0	0.5	+1	0.5
8	0	0.5	0.5	1.0	-1.0	-1	0
9	0	0	0	0	0.5	+1	0.5
10	0	0.5	0.5	1.0	-1.0	-1	0
11	4.0	0	4.0	0	0.5	+1	0.5
12	4.0	0.5	4.5	1.0	3.0	+1	1.0
13	4.0	1.0	5.0	2.0	2.5	+1	1.5
14	4.0	1.5	5.5	3.0	2.0	+1	2.0
15	4.0	2.0	6.0	4.0	1.5	+1	2.5
16	4.0	2.5	6.5	5.0	1.0	+1	3.0
17	4.0	3.0	7.0	6.0	0.5	+1	3.5
18	4.0	3.5	7.5	7.0	0	+1	4.0
19	4.0	4.0	8.0	8.0	-0.5	-1	3.5
20	4.0	3.5	7.5	7.0	0	+1	4.0
21	4.0	4.0	8.0	8.0	-0.5	-1	3.5
22	4.0	3.5	7.5	7.0	0	+1	4.0
23	3.0	4.0	7.0	8.0	-1.5	-1	3.5
24	3.0	3.5	6.5	7.0	-1.0	-1	3.0
25	3.0	3.0	6.0	6.0	-0.5	-1	2.5
26	3.0	2.5	5.5	5.0	0	+1	3
27	3.0	3.0	6.0	6.0	-0.5	-1	2.5
28	3.0	2.5	5.5	5.0	0	+1	3.0
29	3.0	3.0	6.0	6.0	-0.5	-1	2.5
30	8.0	2.5	10.5	5.0	5.0	+1	3.0
31	8.0	3.0	11.0	6.0	4.5	+1	3.5
32	8.0	3.5	11.5	7.0	4.0	+1	4.0
33	8.0	4.0	12.0	8.0	3.5	+1	4.5
34	8.0	4.5	12.5	9.0	3.0	+1	5.0
35	8.0	5.0	13.0	10.0	2.5	+1	5.5
36	8.0	5.5	13.5	11.0	2.0	+1	6.0
37	8.0	6.0	14.0	12.0	1.5	+1	6.5
38	8.0	6.5	14.5	13.0	1.0	+1	7.0

10

-continued

step	$\Delta_h[n]$	$\Delta_p[n]$	$\Delta_{p+h}[n]$	$\tilde{\Delta}_{p+h}[n-1] + 2b[n-1]\Delta$	$\tilde{\Delta}_{p+h}[n-1] - b[n-1]\Delta$	$b[n]$	$\Delta_p[n]$
39	8.0	7.0	15.0	14.0	0.5	+1	7.5
40	8.0	7.5	15.5	15.0	0	+1	8.0
41	8.0	8.0	16.0	16.0	-0.5	-1	7.5
42	8.0	7.5	15.5	15.0	0	+1	8.0

Accordingly, the example contemplates:

Step 1: AN updates the existing received power differential or SNR differentials between two AT TX antennas. $\Delta_{p+h}[n]$

Step 2: AN estimates the sum of channel fluctuation and Tx power fluctuation.

$\tilde{\Delta}_{p+h}[n-1] = \tilde{\Delta}_{p+h}[n-1] + b[n-1]\Delta$ if there is no error on the feedback channel, or $\tilde{\Delta}_{p+h}[n-1] = \tilde{\Delta}_{p+h}[n-1] - b[n-1]\Delta$, if there is error on the feedback channel.

Step 3: AN estimates difference between channel $\Delta_h[n]$ and TX Power $\Delta_p[n]$, $\Delta_{p+h}[n] - \tilde{\Delta}_{p+h}[n-1] = \Delta_{p+h}[n] - (\tilde{\Delta}_{p+h}[n-1] + 2b[n-1]\Delta)$

Step 4: Quantize the difference $\Delta_{p+h}[n] - \tilde{\Delta}_{p+h}[n-1]$. Where $\Delta_h[n]$, $\Delta_{p+h}[n]$ is the channel response vector. It could be a column or a row of the channel response matrix, depending the way of notation. $b[n]$ is the bits or bit vector to be sent or to be received/decoded.

FIG. 17 is a diagram featuring a flow for access network side channel quantization according to the present invention including error propagation control. A gain signal is provided to a power control decision with possible channel error detection element and a channel variation estimation and tracking element. The power decision element generates a single-bit CSI signal, which is fed back to a transmit power estimation and tracking element and to a feedback channel element. The output of the feedback channel element is returned to the power control decision element. The outputs of the channel variation estimation and tracking element and the transmit power estimation and tracking element are provided to the power control decision element. The gain signal is derived, in one embodiment as follows:

$$\text{GAIN} = \text{ABS}(\text{DELTA2}/\text{DELTA1})\text{dB}$$

FIG. 18 is a block diagram illustrating a flow 1800 for access terminal side channel quantization according to the present invention. In addition to the access network flow elements, the flow 1800 of FIG. 18 also shows the feedback channel element producing a CSI signal at the access terminal, which is provided to an interpreter ("1→+DELTA"), thus passing the interpreted gain adjustment to a transmit power control element.

It is recommended to periodically reset the accumulator. Thus, the AT power allocation is periodically reset into a predefined value, say the AT TX power half and half split between two TX antennas. Therefore the AN side can reset the local TX power estimator accordingly.

For Error Propagation detection, employ the following where Δ is equivalent to DELTA:

$$\Delta_{p+h}[n] - \tilde{\Delta}_{p+h}[n-1] = \Delta_{p+h}[n] - (\Delta_{p+h}[n-1] + 2b[n-1]\Delta)$$

$$\text{Calculate } D = \Delta_{p+h}[n] - \Delta_{p+h}[n-1]$$

If $\text{Db}[n-1]\Delta \geq 0$, this means the power differential change of actual received signal is in the same direction of power control. Therefore, local predication of the sum of channel differential and TX power differential should be updated as

$$\tilde{\Delta}_{p+h}[n] = \tilde{\Delta}_{p+h}[n-1] + 2b[n-1]\Delta.$$

11

Other wise, it means there may be some error that occurred on the feedback channel. Therefore, $\hat{\Delta}_{p+h}[n]=\hat{\Delta}_{p+h}[n-1]-b[n-1]\Delta$.

step	$\Delta_h[n]$	$\Delta_p[n]$	$\Delta_{p+h}[n]$	$\hat{\Delta}_{p+h}[n-1] + 2b[n-1]\Delta$	$\Delta_{p+h}[n] - \hat{\Delta}_{p+h}[n-1]$	$b[n]$	$\Delta_p[n]$
0	0		0				0
1	0	0	0	0	0	+1	0.5
2	0	0.5	0.5	1.0	-0.5	-1	0
3	0	0	0	0	0	+1	0.5
4	0	0.5	0.5	1.0	-0.5	-1	0
5	0	0	0	0	0	+1	0.5
6	0	0.5	0.5	1.0	-0.5	-1	0
7	0	0	0	0	0	+1	0.5
8	0	0.5	0.5	1.0	-0.5	-1	0
9	0	0	0	0	0	+1	0.5
10	0	0.5	0.5	1.0	-0.5	-1	0
11	4.0	0	4.0	0	4.0	+1	0.5
12	4.0	0.5	4.5	1.0	3.5	+1	1.0
13	4.0	1.0	5.0	2.0	3.0	+1	1.5
14	4.0	1.5	5.5	3.0	2.5	+1	2.0
15	4.0	2.0	6.0	4.0	2.0	+1	2.5
16	4.0	2.5	6.5	5.0	1.5	+1->-1	2.0
17	4.0	2.0	6.0	4.0	2.0	+1	2.5
18	4.0	2.5	6.5	5.0	1.5	+1	3.0
19	4.0	3.0	7.0	6.0	1.0	+1	3.5
20	4.0	3.5	7.5	7.0	0.5	+1	4.0
21	4.0	4.0	8.0	8.0	0	+1	4.5
22	4.0	4.5	8.5	9.0	-0.5	-1	4.0
23	4.0	4.0	8.0	8.0	0	+1	4.5

Regarding an optimization target, it is a feature of the present invention to power control, in one embodiment, a dual-antenna transmitter through a feedback channel so that the TX power differentiation between the two TX antennas is proportional to the channel response differentiation.

Another aspect of the present invention is to power control a dual-antenna transmitter through a feedback channel so that the received signal power from the two antennas are almost equal to each other.

The present inventors also note a possible dilemma between TX power control and Tx co-phasing control. Thus, for optimal co-phase vector estimation, it may be expected that the received signal power from two different antennas are close to each other. Consequently, for the power allocation between two antennas of optimal reception SNR, it may be expected that the antenna with a good channel condition is allocated more power than the antenna with a secondary channel condition.

Furthermore, considering imbalanced TX power allocation or antenna selection is not very desirable for co-phase vector estimation, thus it is recommended to periodically reset AT antenna power allocation to a predefined value, say the equal TX power allocation noted above.

Moreover, the difference of power allocations between two antennas can be limited between a certain threshold so that the differentiation between the received signal power from two antennas is not too large for the next co-phase vector estimation or other purpose.

An additional aspect of the present invention comprehends, as alluded to above, transmitting a secondary pilot from the transmitter in order to calculate phase adjustment. For example, a secondary pilot is sent in one slot of every four slots, as is depicted in FIG. 4.

The power adjustment bits are decided through the calculating the singularity of the channel, which can be the ratio of the singular values of the correlation matrix of received signals from two receive antennas.

12

The receiver can keep track the beamforming vector or matrix used by the transmitter and the power through observing the received signals changes before and after each adjustment and the sent adjustment.

Now referring to FIG. 19, a system according to the present invention is shown. Accordingly, two observations are noted:

Observation I: If the TX uses **p1** as the precoding vector, which matches **v1**, and the receiver uses **u1**, the beamforming gain, λ_1 , is achievable.

Observation II: For the rank-1 MTD with the beamforming vector **p1** or MIMO at low SNR region, such as in DO Reverse Link, the optimal policy is to allocate power more or only to the strongest eigenmode λ_1 , where:

$$p = \underset{w \in W}{\operatorname{argmax}} w^H [(Y S^{-1})^H (Y S^{-1}) w]$$

$$= \underset{w \in W}{\operatorname{argmax}} w^H (P^H G_t^H H^H G_t^H G H G P) w$$

$$\max_y = \max \left(\frac{\lambda_{\max}}{\lambda_{\min}} \right)$$

$$[U \ \Lambda \ V] = \operatorname{SVD}(E\{Y Y^H\})$$

$$\operatorname{SVD}(E\{(G_r H G_t P S)(G_r H G_t P S)^H\})$$

$$\operatorname{SVD}(G_r H G_t G_t^H H^H G_r^H)$$

According to observation I, the existing approach is to find a beamforming vector which matches the eigenvector of the composite channel.

Following observation II, **Y** is the received signal matrix, in which each entry denotes the signal received from one antenna during one symbol period. **S**:=the sent signal symbol matrix or vectors. **W**:=the weight matrix applied on the receiver for demodulating the symbols **S** **P**:=the precoding matrix applied on the transmitter before sending the symbols **S** **U**, **V**:=the SVD of the composite channel matrix of **GrHGt** the proposed approach is to adjust the TX power ratio between two RL TX antennas so that the condition number of the composite channel is increased.

FIG. 20 is a block diagram showing a slot structure **2000** for beamforming channel feedback according to the present invention. The structure **2000** is substantially similar to that of FIG. 4, with the exception that in the proposed beamforming mode, FL BMFC phase and power adjustment is sent over the FL every four sub-frames, and the remaining three sub-frames contain phase only FL BMFC. Thus, in the embodiment shown in FIG. 20, BMFC is transmitted for one or two slots every sub-frame and, as noted above, it is transmitted using an additional FL MAC index. For an AT in CL-MTD mode, an additional FL MAC index is assigned.

Target performance is desired to be approximately the same as the RPC channel. Thus, the AN transmits one additional bit, RL TX power adjustment bit, to the AT for adjusting RL TX power allocation between two TX antennas of each RL-MTD AT. In one embodiment, this additional bit can be punctured into the least significant bit of a 2-bit phase feedback as noted above. In another embodiment, the additional bit is transmitted through the differentiation coding between two consecutive slots when 2-bit phase feedback is sent in two slots every 4-slot sub-frame. The actual mechanism for AN to decide the power adjustment bits is an implementation issue and is beyond the scope of the present application. The power adjustment bit is transmitted either every 16 slots or every 64 slots. When the AT receives this bit, it will increase or decrease the TX power ratio a predefined step accordingly. Additionally, every 256 slots, the AT TX power will be reset

13

back to equal power allocation. When the TX power ratio between two TX antennas is larger than a threshold, say 9 dB, the antenna with less TX power may be turned off during the slots when the secondary pilot is not transmitted.

The beamforming vector is calculated when there is a secondary pilot being sent from the transmitter. At this time, the received signal can be expressed by

$$\begin{aligned} r &= \begin{bmatrix} r_1(n) \\ r_2(n) \end{bmatrix} \\ &= HGPS \\ &= \begin{bmatrix} h_{11} & h_{12} \\ h_{21} & h_{22} \end{bmatrix} G[p_1(n) \ p_2(n)] \begin{bmatrix} s_1(n) \\ s_2(n) \end{bmatrix}, \end{aligned}$$

where

$r_1(n)$ and $r_2(n)$ are two symbols received from two receive antennas at the time $t=n$, individually;

$$\begin{bmatrix} h_{11} & h_{12} \\ h_{21} & h_{22} \end{bmatrix}$$

is the 2 by 2 channel response matrix;

G is the antenna response matrix;

$P=[p_1(n) \ p_2(n)]$ is the precoding matrix, where $p_1(n)$ is the precoding vector for the primary pilot and data at the time $t=n$;

$$s = \begin{bmatrix} s_1(n) \\ s_2(n) \end{bmatrix}$$

is the symbol vectors sent at the time $t=n$. $s_1(n)$ is the primary pilot plus data; and

$s_2(n)$ is the secondary pilot when is sent only when the secondary pilot is sent.

Therefore, when the secondary pilot is sent, it is noted that:

$$\begin{aligned} Y(n) &= HGP \\ &= [r(n) \ r(n+1)][s(n) \ s(n+1)]^{-1} \end{aligned}$$

The precoding vector for the next beamforming feedback can be calculated through:

$$\begin{aligned} p &= \arg \max_{x \in \text{codebook}} x^H \left(\sum Y^H(n) Y(n) \right) x \\ &= \arg \max_{x \in \text{codebook}} x^H (P^H G^H H^H HGP) x \end{aligned}$$

The singularity of the channel is estimated through calculating the correlation matrix received signal vector:

$$\begin{aligned} R_r &= \sum r^H(n) r(n) \\ &= \sum HGPS(n) s^H(n) P^H G^H H^H \end{aligned}$$

This correlation matrix R_r is preferred to be calculated when there is no secondary pilot from the transmitter, through it can be calculated at any time.

14

Then the singularity of R_r can be calculated through singular-value decomposition of R_r :

$$\begin{aligned} SVD(R_r) &= U \Lambda \Lambda^H \\ &= U \begin{bmatrix} \lambda_1 & \\ & \lambda_2 \end{bmatrix} V^H, \text{ where } \lambda_1 \geq \lambda_2. \end{aligned}$$

The singularity is

$$\gamma = \frac{\lambda_1}{\lambda_2}$$

FIG. 21 is a diagram 2100 showing a flow for access network side channel quantization according to the present invention. The singularity signal γ is provided to a power decision control element and a channel variation estimation and tracking element. The power decision control element generates a single-bit CSI signal, which is fed back to a transmit power estimation and tracking element. The outputs of the channel variation estimation and tracking element and the transmit power estimation and tracking element are provided to the power control decision element.

FIG. 22 is a block diagram highlighting a flow 2200 for access terminal side channel quantization according to the present invention. In addition to the access network flow elements, the flow 2200 of FIG. 22 also shows a feedback channel element producing a CSI signal at the access terminal, which is provided to an interpreter ("1→+DELTA"), thus passing the interpreted adjustment to a transmit power control element. One power control target is to increase the singularity through adjusting the TX power allocation between two TX antennas. DELTA:=Power Adjustment step size, which can be 2 dB, 1 dB, or fixed to match to the size of beamforming codebook size or beamforming resolution.

Actual power Allocation Adjustment rule is an implementation issue. In this example, the optimal power allocation adjustment target is to meet the TX power difference $\Delta_{TX}[n]$ with the channel gain difference between two AT pilots, $\Delta_p[n]$, which can be written by $\Delta_{TX}[n] \approx \Delta_p[n]$. This in turn is implemented through matching the power allocation $\Delta_{TX}[n]$ with the channel singularity

$$\gamma = \frac{\lambda_1}{\lambda_2}.$$

Error detection mechanism also completely is an implementation issue, but an exemplary flow 2300 is presented in FIG. 23. In this configuration, a parameter, ERROR_THRESHOLD, is introduced to be compared with the fluctuation of $\Delta_{TX}[n]$ to decide if a feedback error happened in the last feedback, where:

PC_STEPSIZE (0.5 dB, 1 dB, 2 dB, or matched to the size of beamforming codebook size or resolution

$\lambda[n]$:=The channel singularity.

$\Delta_{TX}[n]$:=The TX power difference between two AT TX antennas

$A[n]$:=Predicted received power difference from two AT TX antennas or pilots.

If the channel errors are not detected, $A[n]$ is updated with $A[n]=A[n-1]+2*b[n]*PC_STEPSIZE$

15

If the channel errors are detected, $A[n]$ is calibrated with $A[n-1]=A[n-1]-4*b[n]*PC_STEPsize$ before generating the next power control command $b[n]=sgn(\Delta_{RX}[n]-A[n-1])$

$b[n]=sgn(\Delta_{RX}[n]-A[n-1])$;=RL MTD power control command bits.

ERROR_THRESHOLD:=this is the threshold for error detection, which can be 0 dB, $-PC_STEPsize$, or other predefined value.

FIG. 24 is a flow diagram illustrating a reverse link beam-forming method according to the present invention. Operationally, it is a feature of the present invention to power control a dual-antenna transmitter through a feedback channel so that the TX power differentiation between the two TX antennas is proportional to the channel response differentiation. Another aspect is to power control a dual-antenna transmitter through a feedback channel so that the received signal power from the two antennas are almost equal to each other.

The present inventors note a possible dilemma between TX power control and TX co-phasing control. Thus, for optimal co-phase vector estimation, it may be expected that the received signal power from two different antennas are close to each other. In addition, for the power allocation between two antennas of optimal reception SNR, it may be expected that the antenna with a good channel condition is allocation more power than the antenna with a secondary channel condition.

Considering that imbalanced TX power allocation or antenna selection is not very desirable for co-phase vector estimation, it is recommended to periodically reset AT antenna power allocation to a predefined value, say the equal TX power allocation.

The delta of power allocation between two antennas can be limited between a certain threshold so that the differentiation between the received signal power from two antennas is not too large for the next co-phase vector estimation or other purpose.

Those skilled in the art should appreciate that they can readily use the disclosed conception and specific embodiments as a basis for designing or modifying other structures for carrying out the same purposes of the present invention, and that various changes, substitutions and alterations can be made herein without departing from the scope of the invention as defined by the appended claims.

What is claimed is:

1. A system, comprising:

an access terminal, comprising:

a first plurality of communication modules, wirelessly coupled to a second plurality of communication modules of an access network, that receives a first plurality of signals corresponding to the plurality of the communication modules;

a receiver, coupled to the first plurality of communication modules, that receives an index from the access network which indicates a number of the first plurality of signals; and

a processor, that adjusts a transmitting gain of the first plurality of communication modules; and

the access network, comprising:

a channel estimator, that generates the second plurality of signals according to the first plurality of signals; and

a channel variation estimator, that receives a gain signal corresponding to the first plurality of signals and that generates a channel variation vector according to the gain signal and the channel circumstances,

16

wherein the access network adjusts a power control signal to the access terminal according to the channel variation vector.

2. The system as recited in claim 1, wherein the access network further comprising:

a TX power estimator, that receives the power control signal and that estimates a TX power vector of the first plurality of signals; and

a power control signal generator, that receives the channel variation vector and the TX power vector, and that generates the power control signal.

3. The system as recited in claim 1, wherein the first plurality of signals comprises at least one of the following:

a delay parameter between the plurality of communication modules;

a phase difference parameter between the plurality of communication modules; and

a power parameter of the plurality of communication modules.

4. The system as recited in claim 1, wherein the first plurality of communication modules transmits a plurality of pilots, wherein the plurality of pilots are calculated and transmitted according to the first plurality of signals received from the access network.

5. The system as recited in claim 1, wherein the processor further comprising:

generates a channel state information from the first plurality of signals;

increases the transmit power when the channel state information is a first value; and

decreases the transmit power when the channel state information is a second value.

6. An apparatus wirelessly coupled to an access terminal, the apparatus comprising:

a plurality of communication modules, coupled to the access terminal, that transmits a first plurality of signals; a transmitter, coupled to the access terminal, that sends an index which indicates a number of the plurality of signals;

a channel estimator, that generates a second plurality of signals according to the first plurality of signals transmitted by the access terminal; and

a channel variation estimator, that receives a gain signal corresponding to the first plurality of signals and that generates a channel variation vector according to the gain signal and the channel circumstances,

wherein the access network adjusts a power control signal to the access terminal according to the channel variation vector.

7. The apparatus as recited in claim 6, wherein the access network further comprising:

a TX power estimator, that receives the power control signal and that estimates a TX power vector of the first plurality of signals; and

a power control signal generator, that receives the channel variation vector and the TX power vector, and that generates the power control signal.

8. The apparatus as recited in claim 6, wherein the first plurality of signals comprises at least one of the following:

a delay parameter between the plurality of communication modules;

a phase difference parameter between the plurality of communication modules; and

a power parameter of the access terminal.

9. The apparatus as recited in claim 6, wherein the channel estimator calculates the singularity of a channel response vector according to the first plurality of signals.

17

10. The apparatus as recited in claim 6, wherein the channel estimator comprises:

- a feedback error detector, that receives a gain signal and a power control signal and that provides a error detecting signal;
- a power estimator, that receives the error detecting signal and the power control signal and that estimates a TX power vector; and
- a quantizer, that receives the TX power vector and that maps the TX power vector into the power control signal which is related to the first plurality of signals.

11. The apparatus as recited in claim 10, wherein the feedback error detector further comprises:

- a timer, that directs the feedback error detector to update an accumulating value periodically;
- a comparator, that receives the gain signal and that decides whether the gain signal is bigger than a previous power control signal and the accumulating value; and
- a processor, wherein when the accumulating value is updated and the gain signal is bigger than the previous power control signal and the accumulating value, the processor generates the TX power vector according to the accumulating value and the power control signal.

12. The apparatus as recited in claim 6, wherein the channel estimator comprises

- an estimator, that uses a first phase of one of the first plurality of signals as a reference signal, and that calculates a phase difference of the reference signal and another plurality of signals; and
- a modulator, coupled to the estimator, that maps the phase difference to a plurality of bits.

13. The apparatus as recited in claim 12, wherein the reference signal further comprises a second phase with a interval of the first phase.

14. The apparatus as recited in claim 12, wherein the modulator employs one of the following:

- a direct delta modulation;
- a delta sigma modulation;
- an adaptive delta modulation;
- a leaky delta modulation; and
- a linear quantization.

15. A method for a system which comprising an access terminal wirelessly coupled to an access network, the method comprising:

- within the access terminal:
 - receiving a plurality of signals corresponding to a plurality of communication modules;
 - receiving an index from the access network which indicates a number of the plurality of signals; and
 - adjusting the gain of the access terminal; and
- within the access network:
 - receiving a gain signal corresponding to the plurality of signals and generating a channel variation vector according to the gain signal and channel circumstances;
 - wherein the access network adjusts a power control signal to the access terminal according to the channel variation vector.

16. The method as recited in claim 15, further comprising: receiving a power control signal and estimating a TX power vector of the plurality of signals; and receiving the channel variation vector and the TX power vector, and generating the power control.

17. The method as recited in claim 15, wherein the plurality of signals comprises at least one of the following:

- a delay parameter between the plurality of communication modules;

18

- a phase difference parameter between the plurality of communication modules; and
- a power parameter of the plurality of communication modules.

18. The method as recited in claim 15, wherein the method further comprises transmitting a plurality of pilots, wherein the plurality of pilots are calculated and transmitted according to the plurality of signals received from the access network.

19. The method as recited in claim 15, wherein the method further comprises:

- generating a channel state information from the plurality of signals;
- increasing a transmit power when the channel state information is a first value; and
- decreasing the transmit power when the channel state information is a second value.

20. A method for an access network which is wirelessly coupled to an access terminal, the method comprising:

- transmitting, by the access terminal, a plurality of signals corresponding to a plurality of communication modules;
- sending, by the access network, an index which indicates a number of the plurality of signals; and
- adjusting and modulating a channel state information into the plurality of signals;
- receiving a gain signal corresponding to the plurality of signals and generating a channel variation vector according to the gain signal and channel circumstances; wherein the access network adjusts a power control signal to the access terminal according to the channel variation vector.

21. The method as recited in claim 20, further comprising: receiving a power control signal and estimating a TX power vector of the plurality of signals; and receiving the channel variation vector and the TX power vector, and generating the power control signal.

22. The method as recited in claim 20, wherein the plurality of signals comprises at least one of the following:

- a delay parameter between the plurality of communication modules;
- a phase difference parameter between the plurality of communication modules; and
- a power parameter of the access terminal.

23. The method as recited in claim 20, wherein the method further comprises calculating the singularity of a channel response vector according to the plurality of signals.

24. The method as recited in claim 20, wherein the method further comprises:

- receiving a gain signal and a power control signal and providing a error detecting signal;
- receiving the error detecting signal and the power control signal and estimating a TX power vector; and
- mapping the TX power vector into the power control signal which is related with the plurality of signals.

25. The method as recited in claim 24, wherein the method further comprises:

- indicating an update to an accumulating value periodically;
- deciding whether the gain signal is bigger than a previous power control signal and the accumulating value; and
- generating the TX power vector according to the accumulating value and the power control signal, when the accumulating value is updated and the gain signal is bigger than the previous power control signal and the accumulating value.

26. The method as recited in claim 20, wherein the method further comprises:

19

using a first phase of one of the plurality of signals as a reference signal, and calculating the phase difference of the reference signal and another plurality of signals; and mapping the phase difference to a plurality of bits.

27. The method as recited in claim **26**, wherein the reference signal comprises a second phase with a interval of the first phase.

28. The method as recited in claim **26**, wherein the mapping comprises using one of the following:

a direct delta modulation;

a delta sigma modulation;

an adaptive delta modulation;

a leaky delta modulation; and

a linear quantization.

* * * * *

20

10

15