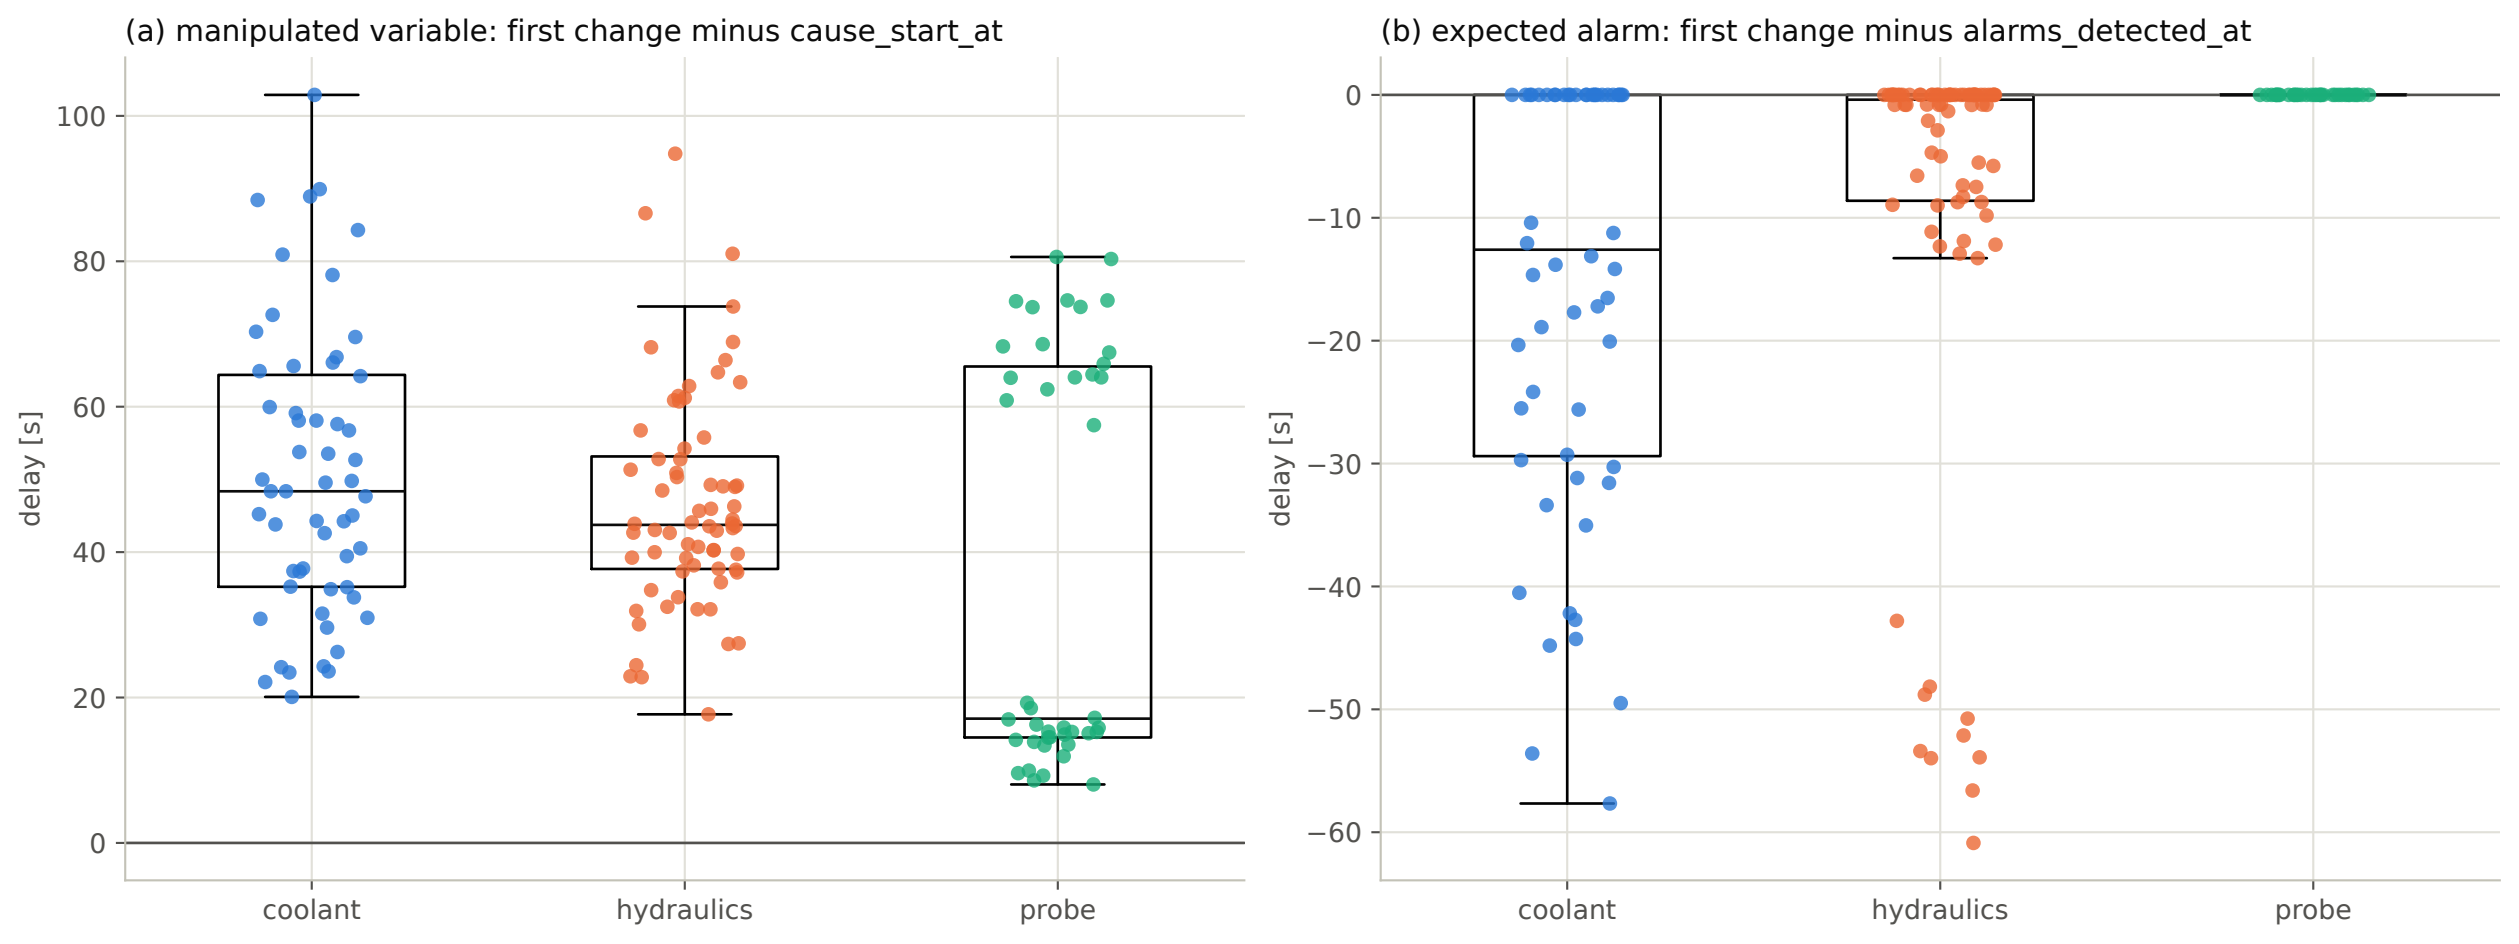
(a) manipulated variable: first change minus cause_start_at
delay [s]
100
80
60
40
20
0
coolant
hydraulics
probe
(b) expected alarm: first change minus alarms_detected_at
delay [s]
0
−10
−20
−30
−40
−50
−60
coolant
hydraulics
probe