



CONTENTS

Introduction to WI-FI fuctions	1
Download and install the control software	2
Reset AC WI-FI module	4
Smartphone ,pad or other mobile terminals connect to WI-FI or hotspot	4
Configure the Devices	5
Manage the Devices	6
Others	7
Appendix A: < <config check="" failed="" items="">></config>	7

Introduction to WI-FI Functions The AC system is equipped with remote control technology, with the WI-FI module inside the machine connected to the display panel and the command to run the AC transmitted. The AC system is in constant connection with a wireless router or access point attached to the Internet. Mobile terminals such as smart phones and tablet computers, on which special control software are installed and WI-FI modules successfully configured locally, can be used as remote controllers once they are connected to the Internet.

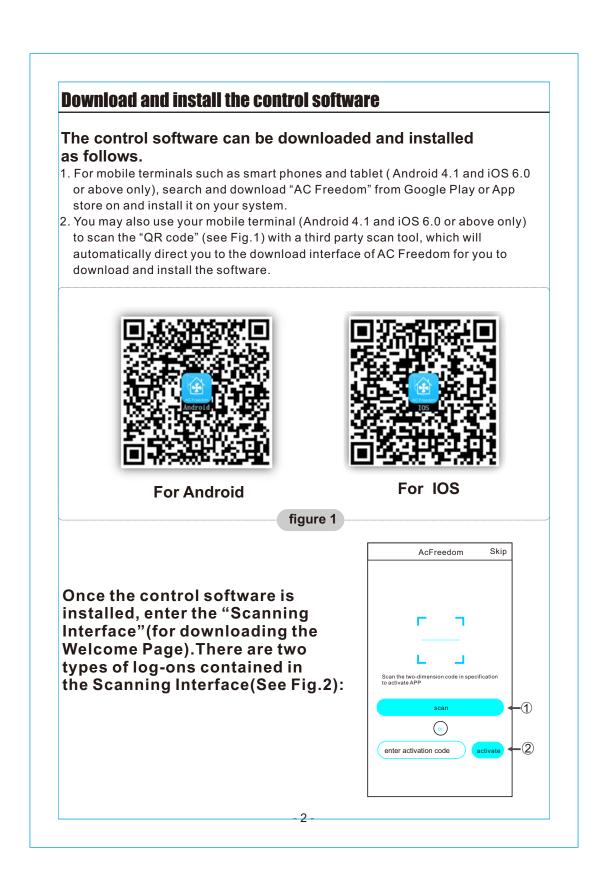

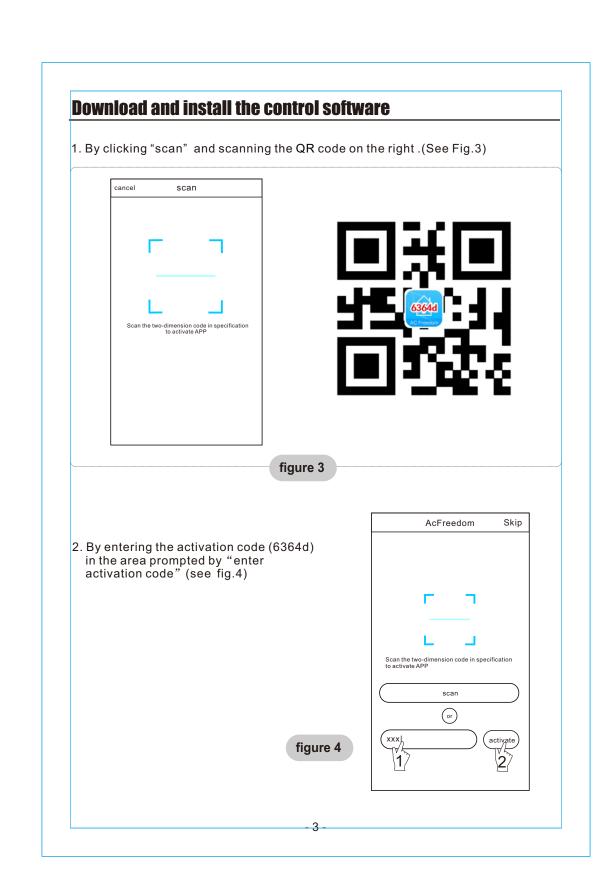


Reset AC WI-FI module In the case of first time configuration or after SET TEMPERATURE(°C) changing the connected wireless router is, the WI-FI module inside the SET air conditioner needs to be reset. MODE CLEAN SPEED SLEEP FRESH STRONG To reset the module: press "health" button 8 times Press the "HEALTH" key on the remote control for 8 times (see Fig.5) within 5 seconds after the air conditioner is turned on. The reset is not done until you hear two beeps of the buzzer. The remote control provided in this figure is just one of many models which is for your reference only. Please rely on the model you have actually bought, though the operations are the same for all models. Smartphone ,pad or other mobile terminals connect to WIFI or hotspot Activate the WI-FI function of the mobile terminal and connect it to a wireless router or an access point. A wireless router is required for the WI-FI function to work. Please purchase one if you do not already have one.

Configure the Devices After the control software is downloaded and installed on the mobile terminal, configure the AC devices according to the following figure. /IFI name: XXXXX Start the configuration Add device Once the configuration the WI-FI name will Activate the control is complete, the "Device List" interface automatically appear in "Wi-Fi name". Enter the software and click "Add device"within will be automatically password of the Wi-Fi returned to and the 30 minutes after the and click "Start the configured the AC can WIFI module is reset. configuration". be seen. figure 6 Note: 1.In the case of first time configuration or after the connected wireless router or access point is changed, make sure the mobile terminal is already connected to the wireless router or access point to be paired with the WI-FI module. 2.If the configuration is failed, press "Config faild check items" to check the notes about the failure before reconfigure the AC. After the configuration is successful, click the corresponding AC name to enter the control interface for further operation.

Manage the Devices 1. Modify and Lock the Devices

- ★In the "Device List" interface, press and hold for more than 0.5 second (for Android system)or press (for IOS system) the icon of an existing device to activate the "modify the name" interface.
- ★ You can change the name or the icon, to identify different AC devices.
- ★ To lock a device, simply touch the "Locking Device" icon. Once a device is locked, other users won't be able to search for it, thus preventing it from hostile control. After the configurations of the AC device names, icons and locking status are complete, touching "Save" will save and validate them.

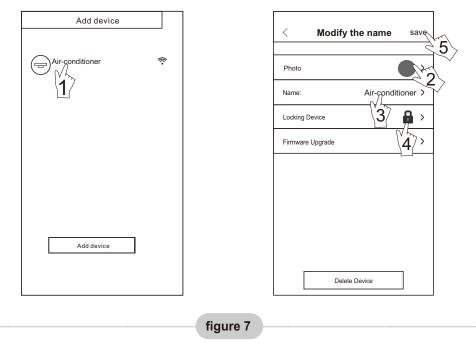

2. Delete an AC under control

For Android: Click "Delete Device" button under "Modify the name" in Fig.7. For IOS: Swipe over the AC name to the left under "Device List" and click "Delete".

3. Remote control with wireless router

Once the wireless router is connected to the Internet, activating the GPRS on the mobile terminal will enable the remote control of the devices.



Others

- 1. The software provides help service through which the users may check the operational instructions of the software and other information.
- Besides, as the operation interface and the function of the software is under constant improvement, we will keep you informed about the subsequent upgrades for your updating.
- 3. As the operation interface may change due to the constant version upgrading, the figures in this manual are for reference only, so please rely on the actual operation interface.

Appendix A: <<Config faild check items>>

- 1. Please check the Wi-Fi icon on the air conditioner panel, if the icon not display, please contact customer service.
- 2. Please make sure the mobile phone network under the current router WI-FI environment: Close the mobile phone 3G/4G data connection, to be connected to the router WI-FI pairing.
- 3. Please check whether the module reset successfully: Press the button health on the remote controller 8 times to reset, a "drip drip " sound said reset successfully.
- 4. Please check the Wi-Fi name of the router, recommended not contain spaces and other non-alphanumeric characters.
- 5. Please check the Wi-Fi password of the router, not allowed more than 32 bits, recommended not contain spaces and special symbols in addition to letters and numbers.
- 6. Please check whether the Wi-Fi password input is correct when APP configuration: you can check show password to confirm when input the WI-FI password.

- 7