VeloX

EVERY RAY COUNT



VELOX ENERGY PVT. LTD.

Smart Solar Solutions for
Homes, Businesses & Industries

www.veloxenergy.in

VeloX

SMART ENERGY SMARTER FUTURE

On-grid Inverter

VE-2.5 / 3.0 / 3.3 / 3.6 / 4.0 / 4.2 / 4.6 KW

VE Series

Single-Phase & Single-MPPT



FEATURES

Flexible Design

- Small size, light weight, support manual installation, reduce user installation and maintenance cost
- Multi-communication interface: RS485, GPRS (optional), Wifi (optional)
- DC breaker, easy to maintain and safe to use convection without fan
- Digital DSP control technology

Grid Friendly

- Active and passive anti-islanding protection
- Continuously adjustable active power (0–100%) function
- Zero Export Function

Efficient Conversion

- Transformerless, max. efficiency is up to 98%
- MPPT efficiency is up to 99%
- Total current THD <3%

Excellent Qualities

- **CQC Gold Sun** Certification
- **TUV** Certification
- **SAA** Certification
- **CE** Certification

Premier Destination For High-end Solar Inverter

10 YEARS WARRANTY

Technical Specifications

TECHNICAL DATA	VE-2.5KW	VE-3.0KW	VE-3.3KW	VE-3.6KW	VE-4.0KW	VE-4.2KW	VE-4.6KW
Max. DC input voltage (VDC)	550V						
MPPT voltage range (VDC)	40~550V						
Max. DC current (A)	20A						
Recommended working voltage (VDC)	360V						
MPPT number	1						
Max. input strings per MPP tracker	1						
AC OUTPUT DATA							
Rated output power (W)	2500W	3000W	3300W	3600W	4000W	4200W	4600W
Rated output current (A)	11A	13A	14.3A	15.7A	17.4A	18.2A	20A
Rated power grid voltage (Vac)	220/230/240V						
Power grid voltage range (Vac)	90~300 Vac (Adjustable)						
Rated power grid frequency	50Hz/60Hz						
Grid frequency range	45~55Hz/55~65Hz						
THD	<3% (Under the rated power)						
Power factor	>0.99 (Under rated power) / Adjustable range 0.8 (Leading) ~ 0.8 (Lagging)						
DC component	<0.5% (Under rated power)						
SYSTEM DATA							
MPPT efficiency (%)	98%						
Max efficiency (%)	99%						
Humidity	0~100%, No condensation						
Cooling	Natural cooling						
Allowed ambient temperature range	–25°C ~ +60°C						
Consumption during night	<1W						
Noise	<40dB						
Max. altitude	4000m						
MECHANICAL DATA							
Size (Width × Height × Depth)	294×216×120 mm						
Weight (kg)	5.5 kg						
Protection class	IP66						
DISPLAY & COMMUNICATION							
Communication interface	WIFI						
Human machine interface	LCD						
CERTIFICATES							
BIS	IS 16221 (PART 2):2015/IEC 62109-2 :2011 & IS 16169 :2014/IEC 62116 :2008						

VeloX

SMART ENERGY SMARTER FUTURE

On-grid Inverter

VE-5.0 / 5.3 / 5.5 / 6.0KW



VE Series

Single-Phase & Single-MPPT

FEATURES

Flexible Design

- Small size, light weight, support manual installation, reduce user installation and maintenance cost
- Multi-communication interface: RS485, GPRS (optional), Wifi (optional)
- DC breaker, easy to maintain and safe to use convection without fan
- Digital DSP control technology

Grid Friendly

- Active and passive anti-islanding protection
- Continuously adjustable active power (0–100%) function
- Zero Export Function

Efficient Conversion

- Transformerless, max. efficiency is up to 98%
- MPPT efficiency is up to 99%
- Total current THD <3%

Excellent Qualities

- **CQC Gold Sun** Certification
- **TUV** Certification
- **SAA** Certification
- **CE** Certification

Premier Destination For High-end Solar Inverter

10 YEARS WARRANTY


Technical Specifications

TECHNICAL DATA	VE-5.0KW	VE-5.3KW	VE-5.5KW	VE-6.0KW
Max. DC input voltage (VDC)	600V			
MPPT voltage range (VDC)	40~600V			
Max. DC current (A)	20A			
Recommended working voltage (VDC)	360V			
MPPT number	1			
Max. input strings per MPP tracker	1			
AC OUTPUT DATA				
Rated output power (W)	5000W	5300W	5500W	6000W
Rated output current (A)	21.7A	23.0A	24.0A	26.0A
Rated power grid voltage (Vac)	220/230/240V			
Power grid voltage range (Vac)	90~300 Vac (Adjustable)			
Rated power grid frequency	50Hz/60Hz			
Grid frequency range	45~55Hz/55~65Hz			
THD	<3% (Under the rated power)			
Power factor	>0.99 (Under rated power) / Adjustable range 0.8 (Leading) ~ 0.8 (Lagging)			
DC component	<0.5% (Under rated power)			
SYSTEM DATA				
MPPT efficiency (%)	99%			
Max. efficiency (%)	98%			
Humidity	0~100%, No condensation			
Cooling	Natural cooling			
Allowed ambient temperature range	–25°C ~ +60°C			
Consumption during night	<1W			
Noise	<40dB			
Max. altitude	4000m			
MECHANICAL DATA				
Size (Width × Height × Depth)	294×216×120 mm			
Weight (kg)	5.5 kg			
Protection class	IP66			
DISPLAY & COMMUNICATION				
Communication interface	WIFI			
Human machine interface	LCD			
CERTIFICATES				
BIS	IS 16221 (PART 2):2015/IEC 62109-2 :2011 & IS 16169 :2014/IEC 62116 :2008			

National Presence

Trusted Energy.
Nationwide Reach.

EVERY RAY COUNT

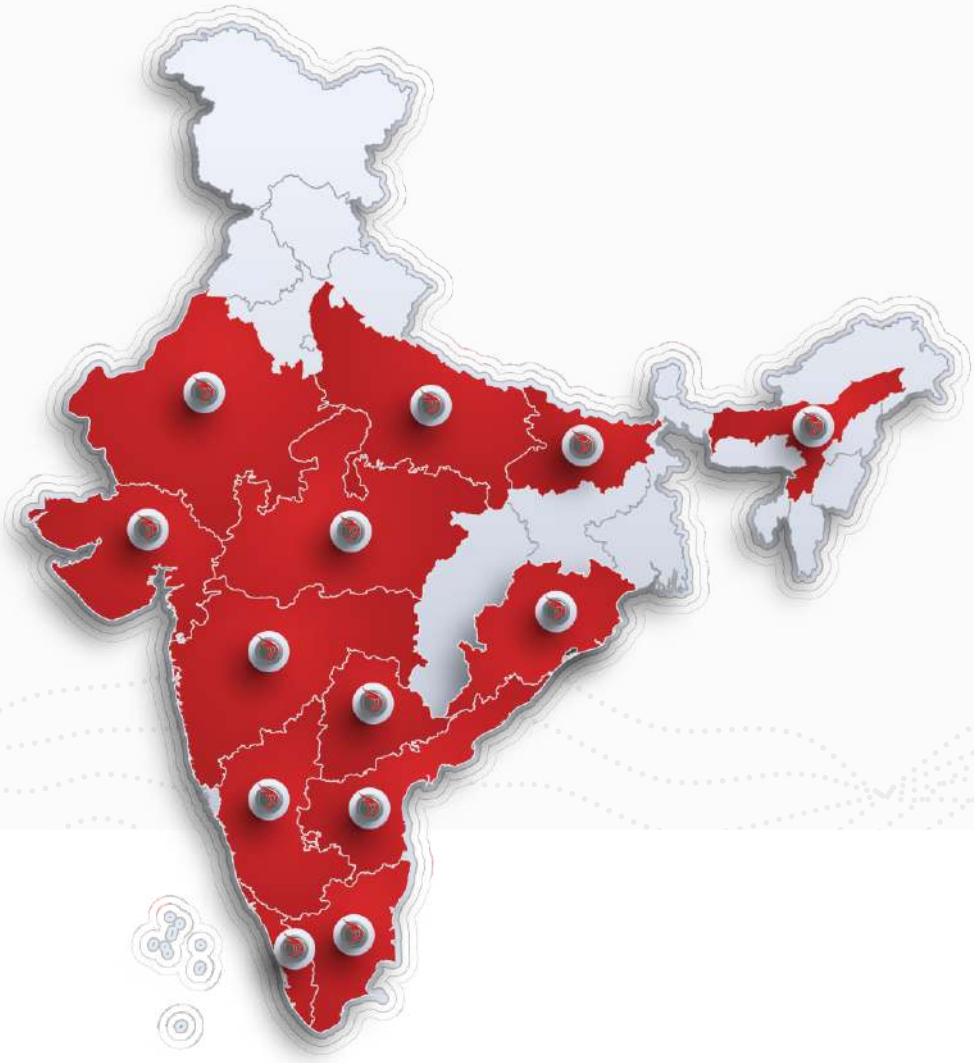

- Gujarat
- Maharashtra
- Rajasthan
- Odisha
- Tamil Nadu
- Andhra Pradesh
- Uttar Pradesh
- Madhya Pradesh
- Karnataka
- Assam
- Bihar
- Kerala
- Telangana

VeloX

VELOX ENERGY PVT. LTD.

Head Office :
706, Anushree Accolade-2, Opp. Shell Petrol Pump,
Science City Road, Sola, Ahmedabad-380 060.

www.veloxenergy.in

info@veloxenergy.in

+91 90817 25258