PNETLab | Topology

Ask Gemini

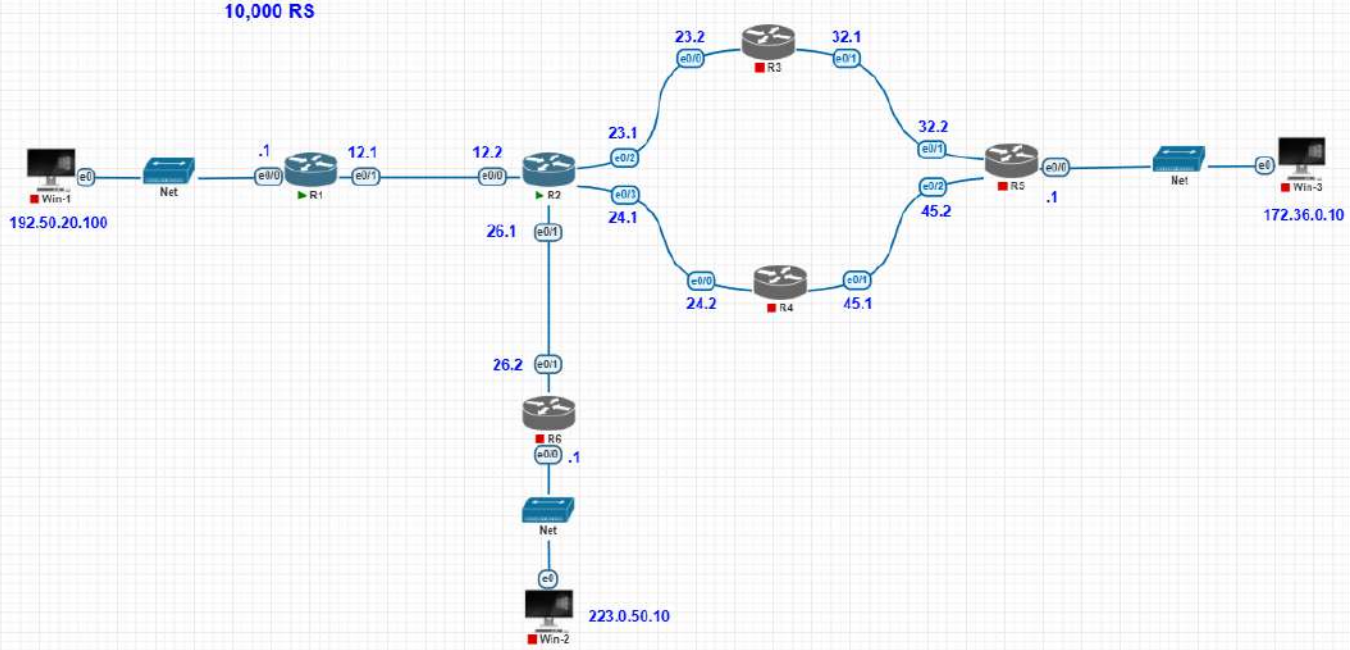
labs.surennetwork.com/legacy/topology

Notifications

SUREN NETWORK
PLAY WITH TECHNOLOGIES

!!!!!! Neenga kudutha fees !!!!!!

10,000 RS



Physical

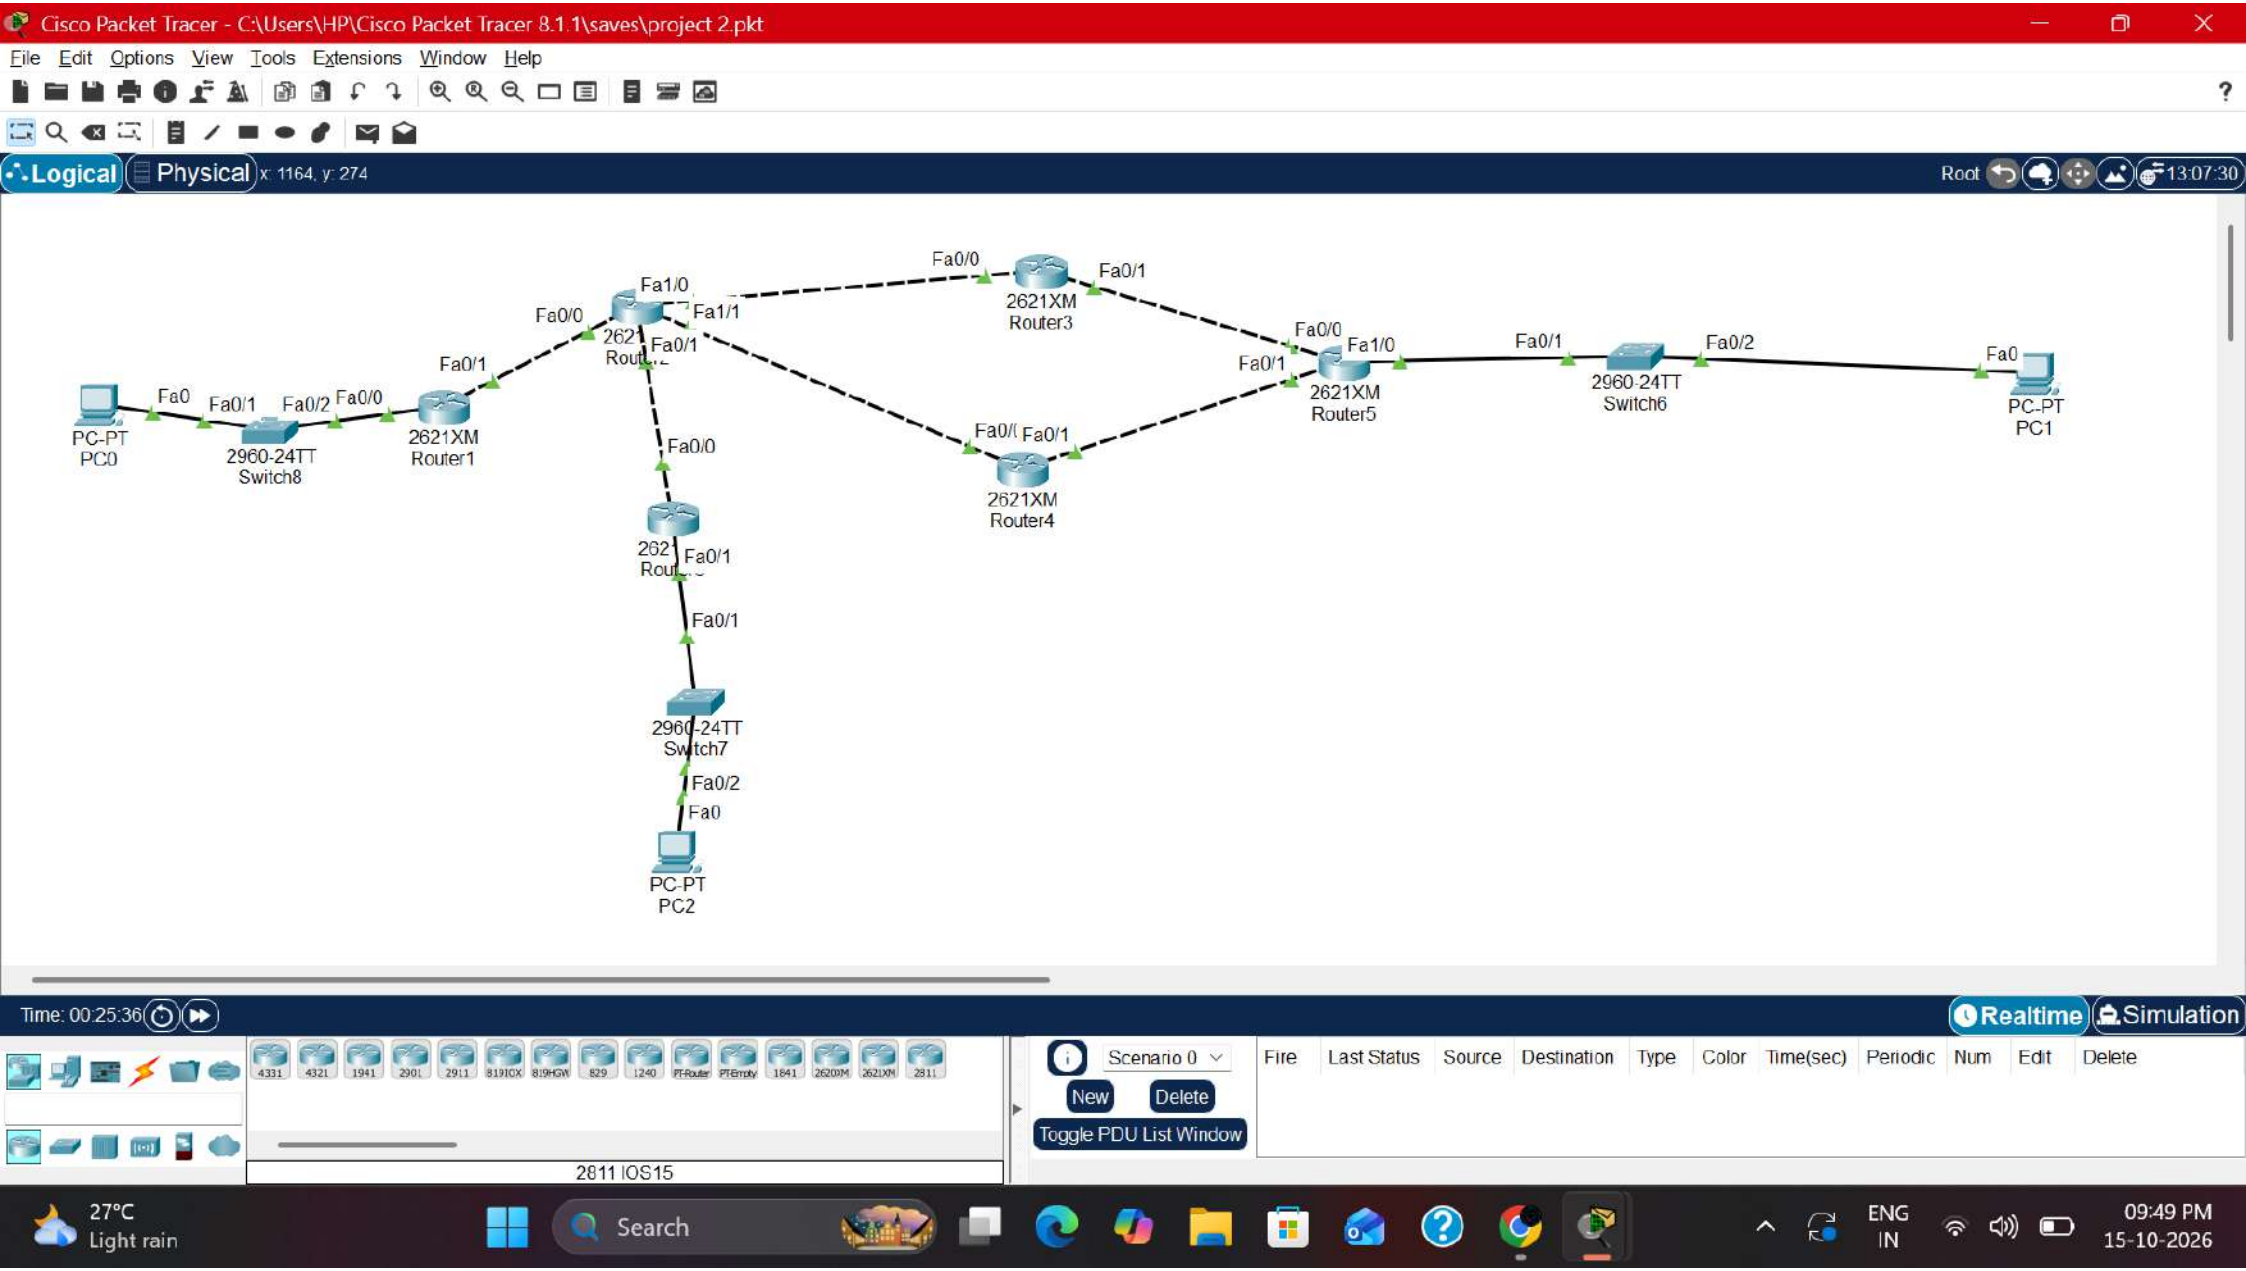
01 : 00 : 00 START

27°

Search

ENG
US

09:56 PM
15-10-2026


Cisco Packet Tracer - C:\Users\HP\Cisco Packet Tracer 8.1.1\saves\project 2.pkt
File Edit Options View Tools Extensions Window Help
Logical Physical x: 1164, y: 274
Root 13:07:30
PC-PT PC0
Fa0
Fa0/1
2960-24TT Switch8
Fa0/2
Fa0/0
2621XM Router1
Fa0/1
Fa0/0
Fa1/0
Fa1/1
Fa0/1
Fa0/0
2621XM Router3
Fa0/1
Fa0/0
Fa1/0
2621XM Router5
Fa0/1
Fa0/1
2960-24TT Switch6
Fa0/2
Fa0
PC-PT PC1
Fa0/0
Fa0/1
2621XM Router4
Fa0/0
Fa0/1
Fa0/1
2960-24TT Switch7
Fa0/2
Fa0
PC-PT PC2
Time: 00:25:36
Realtime
Simulation
2811 IOS15
Scenario 0
New
Delete
Toggle PDU List Window
Fire
Last Status
Source
Destination
Type
Color
Time(sec)
Periodic
Num
Edit
Delete
27°C
Light rain
Search
ENG
IN
09:49 PM
15-10-2026

PC0

Physical Config Desktop Programming Attributes

Command Prompt

```
   Link-local IPv6 Address.....: FE80::210:F7FF:FECD:7A4D
   IPv6 Address....................: ::
   IPv4 Address....................: 192.50.20.100
   Subnet Mask.....................: 255.255.255.0
   Default Gateway.................: ::
                                     192.50.20.1

Bluetooth Connection:

   Connection-specific DNS Suffix..:
   Link-local IPv6 Address.....: ::
   IPv6 Address....................: ::
   IPv4 Address....................: 0.0.0.0
   Subnet Mask.....................: 0.0.0.0
   Default Gateway.................: ::
                                     0.0.0.0

C:\>ping 223.0.50.10

Pinging 223.0.50.10 with 32 bytes of data:

Reply from 223.0.50.10: bytes=32 time=1ms TTL=125
Reply from 223.0.50.10: bytes=32 time=11ms TTL=125
Reply from 223.0.50.10: bytes=32 time=13ms TTL=125
Reply from 223.0.50.10: bytes=32 time<1ms TTL=125

Ping statistics for 223.0.50.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 13ms, Average = 6ms

C:\>ping 172.36.0.10

Pinging 172.36.0.10 with 32 bytes of data:

Reply from 172.36.0.10: bytes=32 time<1ms TTL=122
Reply from 172.36.0.10: bytes=32 time<1ms TTL=122
Reply from 172.36.0.10: bytes=32 time<1ms TTL=122
Reply from 172.36.0.10: bytes=32 time=11ms TTL=122

Ping statistics for 172.36.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 11ms, Average = 2ms

C:\>
```

Top

PC1

Physical Config Desktop Programming Attributes

Command Prompt

```
   Link-local IPv6 Address.....: FE80::201:96FF:FE3C:E1D6
   IPv6 Address....................: ::
   IPv4 Address....................: 172.36.0.10
   Subnet Mask.....................: 255.255.0.0
   Default Gateway.................: ::
                                     172.36.0.1

Bluetooth Connection:

   Connection-specific DNS Suffix..:
   Link-local IPv6 Address.....: ::
   IPv6 Address....................: ::
   IPv4 Address....................: 0.0.0.0
   Subnet Mask.....................: 0.0.0.0
   Default Gateway.................: ::
                                     0.0.0.0

C:\>ping 192.50.20.100

Pinging 192.50.20.100 with 32 bytes of data:

Reply from 192.50.20.100: bytes=32 time=19ms TTL=124
Reply from 192.50.20.100: bytes=32 time=1ms TTL=124
Reply from 192.50.20.100: bytes=32 time=10ms TTL=124
Reply from 192.50.20.100: bytes=32 time=1ms TTL=124

Ping statistics for 192.50.20.100:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 19ms, Average = 7ms

C:\>ping 223.0.50.10

Pinging 223.0.50.10 with 32 bytes of data:

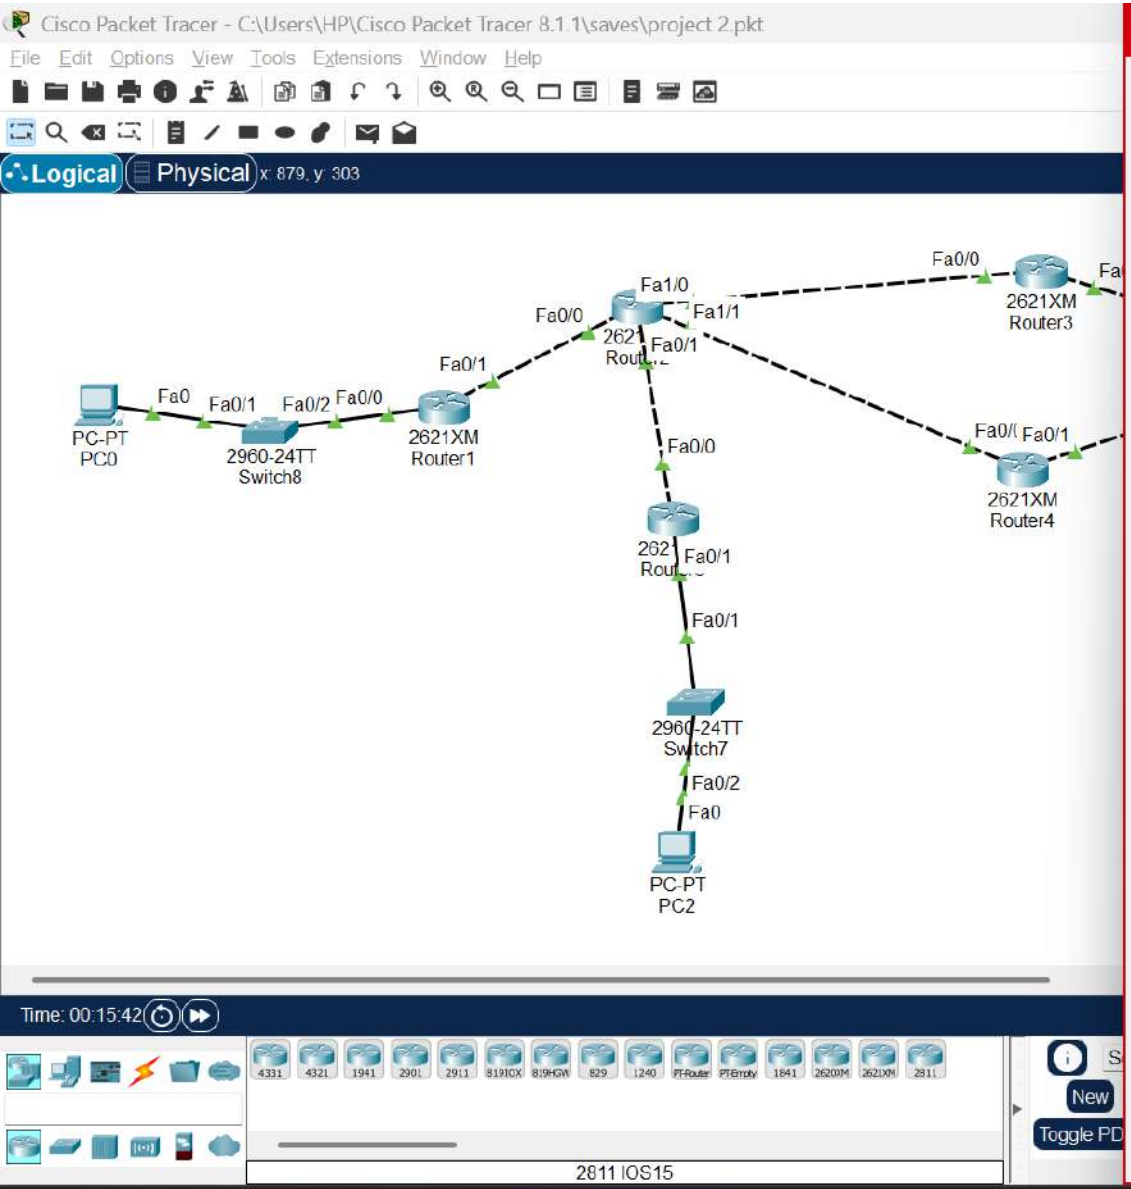
Reply from 223.0.50.10: bytes=32 time<1ms TTL=124
Reply from 223.0.50.10: bytes=32 time<1ms TTL=124
Reply from 223.0.50.10: bytes=32 time<1ms TTL=124
Reply from 223.0.50.10: bytes=32 time=13ms TTL=124

Ping statistics for 223.0.50.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 13ms, Average = 3ms

C:\>
```

Top

27°C Light rain
Search
ENG IN
09:39 PM 15-10-2026



PC2

Physical Config Desktop Programming Attributes

Command Prompt

```
   Link-local IPv6 Address.....: FE80::2D0:97FF:FE66:D452
   IPv6 Address.....: ::
   IPv4 Address.....: 223.0.50.10
   Subnet Mask.....: 255.255.255.0
   Default Gateway.....: ::
                                 223.0.50.1

Bluetooth Connection:

   Connection-specific DNS Suffix..:
   Link-local IPv6 Address.....: ::
   IPv6 Address.....: ::
   IPv4 Address.....: 0.0.0.0
   Subnet Mask.....: 0.0.0.0
   Default Gateway.....: ::
                                 0.0.0.0

C:\>ping 172.36.0.10

Pinging 172.36.0.10 with 32 bytes of data:

Reply from 172.36.0.10: bytes=32 time<1ms TTL=124
Reply from 172.36.0.10: bytes=32 time<1ms TTL=124
Reply from 172.36.0.10: bytes=32 time=10ms TTL=124
Reply from 172.36.0.10: bytes=32 time<1ms TTL=124

Ping statistics for 172.36.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 10ms, Average = 2ms

C:\>ping 192.50.20.100

Pinging 192.50.20.100 with 32 bytes of data:

Reply from 192.50.20.100: bytes=32 time<1ms TTL=125
Reply from 192.50.20.100: bytes=32 time=2ms TTL=125
Reply from 192.50.20.100: bytes=32 time<1ms TTL=125
Reply from 192.50.20.100: bytes=32 time=1ms TTL=125

Ping statistics for 192.50.20.100:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 2ms, Average = 0ms

C:\>
```

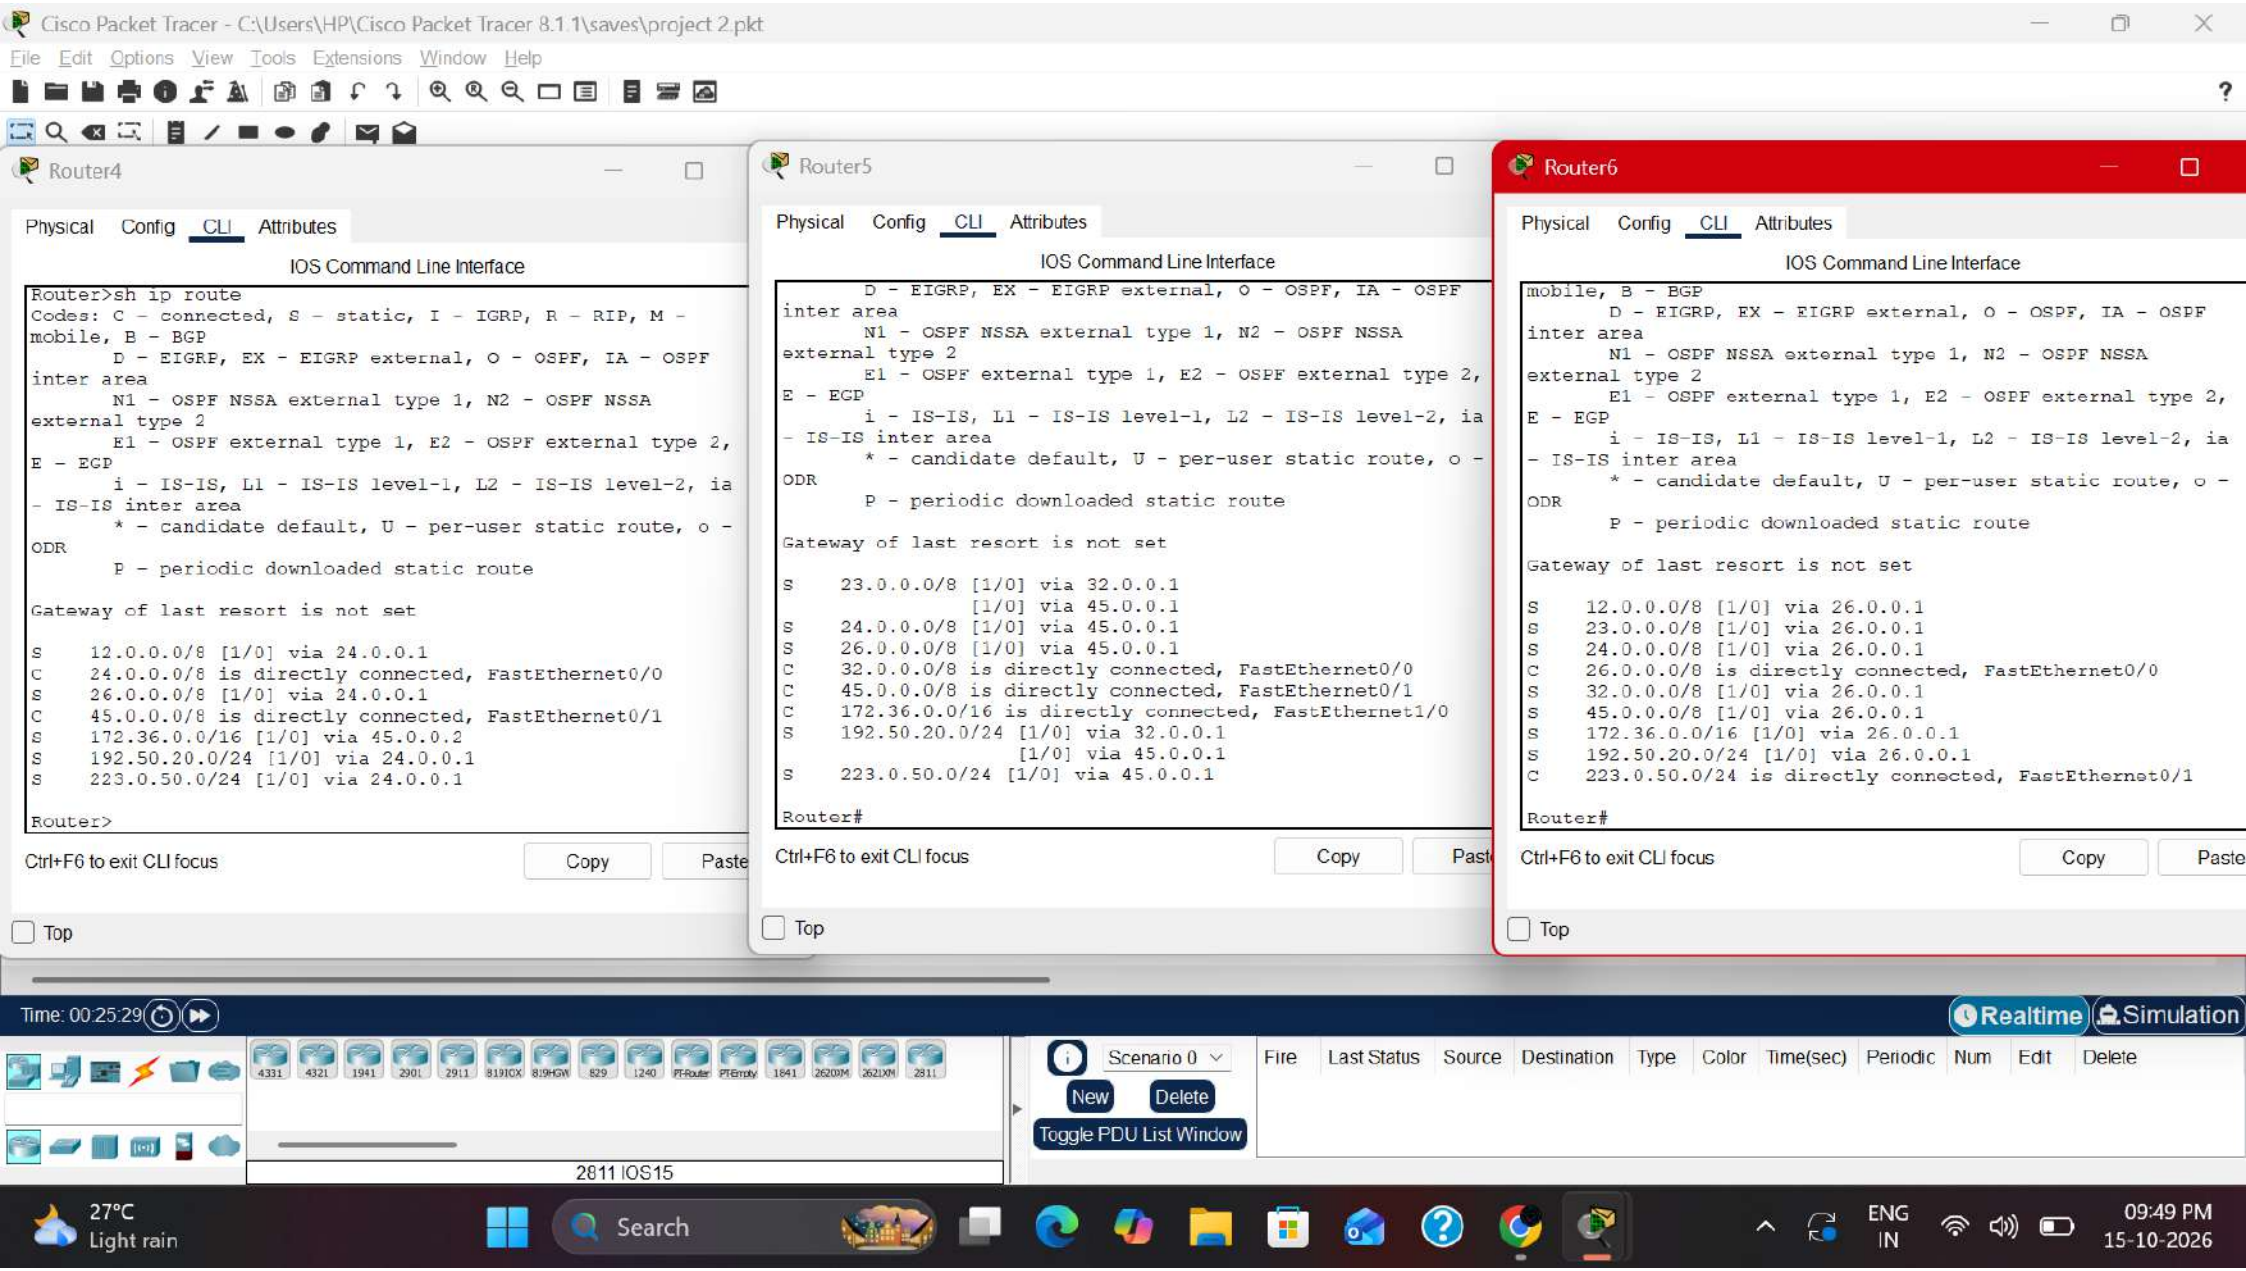
Top

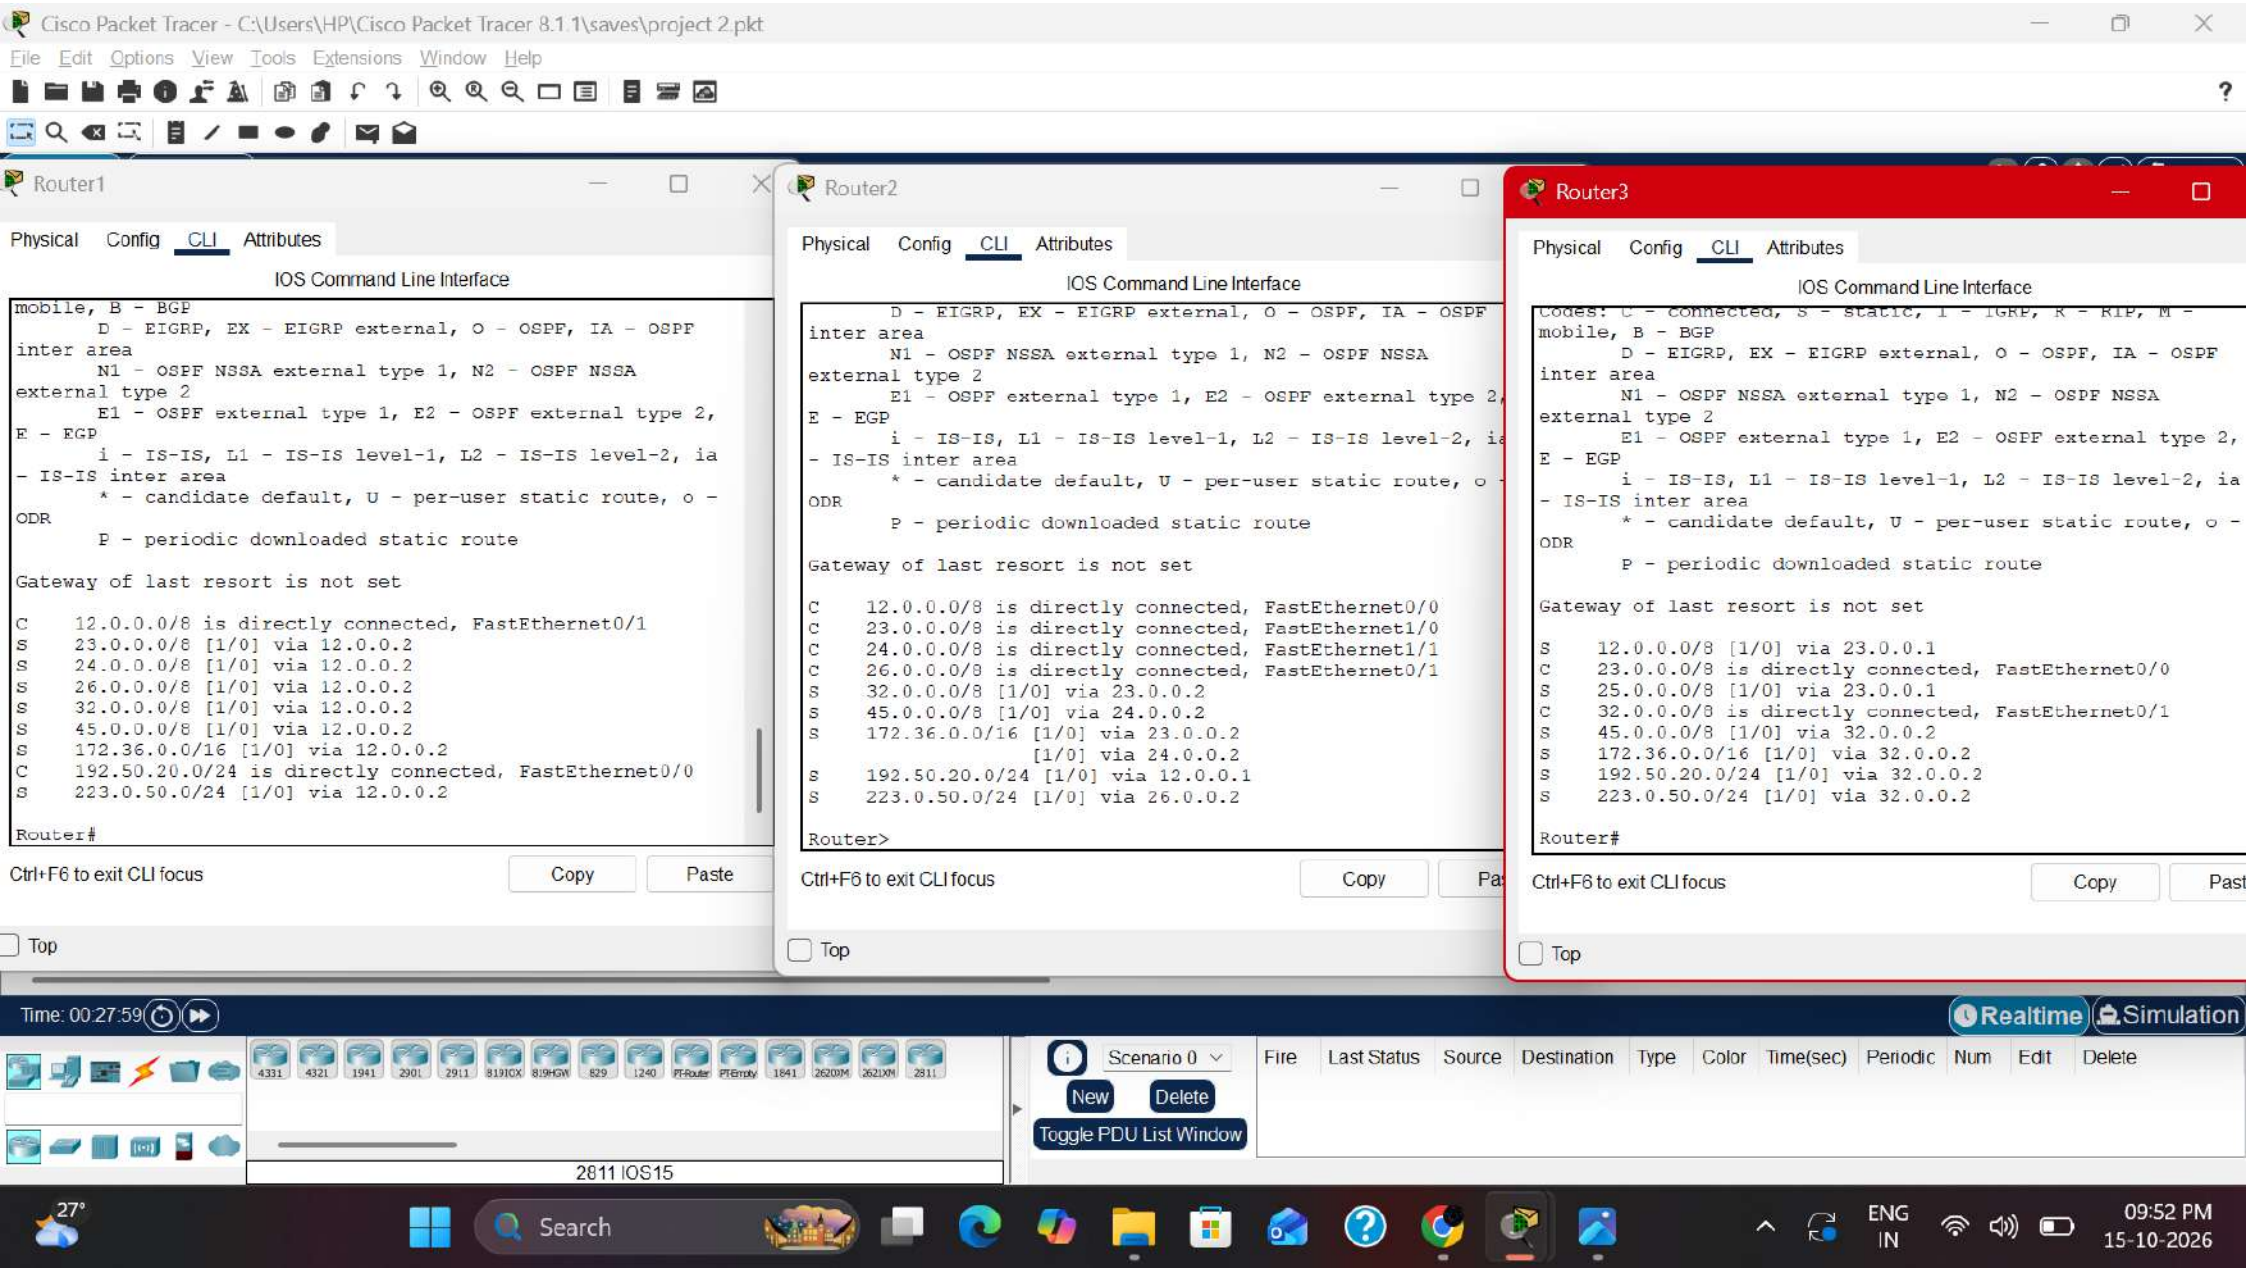
27°C Light rain

Search

ENG IN

09:39 PM 15-10-2026


Cisco Packet Tracer - C:\Users\HP\Cisco Packet Tracer 8.1.1\saves\project 2.pkt
File Edit Options View Tools Extensions Window Help
Router4
Physical Config CLI Attributes
IOS Command Line Interface
Router>sh ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
* - candidate default, U - per-user static route, o - ODR
P - periodic downloaded static route
Gateway of last resort is not set
S 12.0.0.0/8 [1/0] via 24.0.0.1
C 24.0.0.0/8 is directly connected, FastEthernet0/0
S 26.0.0.0/8 [1/0] via 24.0.0.1
C 45.0.0.0/8 is directly connected, FastEthernet0/1
S 172.36.0.0/16 [1/0] via 45.0.0.2
S 192.50.20.0/24 [1/0] via 24.0.0.1
S 223.0.50.0/24 [1/0] via 24.0.0.1
Router>
Ctrl+F6 to exit CLI focus
Copy
Paste
Top
Router5
Physical Config CLI Attributes
IOS Command Line Interface
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
* - candidate default, U - per-user static route, o - ODR
P - periodic downloaded static route
Gateway of last resort is not set
S 23.0.0.0/8 [1/0] via 32.0.0.1
[1/0] via 45.0.0.1
S 24.0.0.0/8 [1/0] via 45.0.0.1
S 26.0.0.0/8 [1/0] via 45.0.0.1
C 32.0.0.0/8 is directly connected, FastEthernet0/0
C 45.0.0.0/8 is directly connected, FastEthernet0/1
C 172.36.0.0/16 is directly connected, FastEthernet1/0
S 192.50.20.0/24 [1/0] via 32.0.0.1
[1/0] via 45.0.0.1
S 223.0.50.0/24 [1/0] via 45.0.0.1
Router#
Ctrl+F6 to exit CLI focus
Copy
Top
Router6
Physical Config CLI Attributes
IOS Command Line Interface
mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
* - candidate default, U - per-user static route, o - ODR
P - periodic downloaded static route
Gateway of last resort is not set
S 12.0.0.0/8 [1/0] via 26.0.0.1
S 23.0.0.0/8 [1/0] via 26.0.0.1
S 24.0.0.0/8 [1/0] via 26.0.0.1
C 26.0.0.0/8 is directly connected, FastEthernet0/0
S 32.0.0.0/8 [1/0] via 26.0.0.1
S 45.0.0.0/8 [1/0] via 26.0.0.1
S 172.36.0.0/16 [1/0] via 26.0.0.1
S 192.50.20.0/24 [1/0] via 26.0.0.1
C 223.0.50.0/24 is directly connected, FastEthernet0/1
Router#
Ctrl+F6 to exit CLI focus
Copy
Paste
Top
Time: 00:25:29
Realtime
Simulation
2811 IOS15
Scenario 0
New
Delete
Toggle PDU List Window
Fire
Last Status
Source
Destination
Type
Color
Time(sec)
Periodic
Num
Edit
Delete
27°C
Light rain
Search
ENG
IN
09:49 PM
15-10-2026


Cisco Packet Tracer - C:\Users\HP\Cisco Packet Tracer 8.1.1\saves\project 2.pkt
File Edit Options View Tools Extensions Window Help
Router1
Physical Config CLI Attributes
IOS Command Line Interface
mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
* - candidate default, U - per-user static route, o - ODR
P - periodic downloaded static route
Gateway of last resort is not set
C 12.0.0.0/8 is directly connected, FastEthernet0/1
S 23.0.0.0/8 [1/0] via 12.0.0.2
S 24.0.0.0/8 [1/0] via 12.0.0.2
S 26.0.0.0/8 [1/0] via 12.0.0.2
S 32.0.0.0/8 [1/0] via 12.0.0.2
S 45.0.0.0/8 [1/0] via 12.0.0.2
S 172.36.0.0/16 [1/0] via 12.0.0.2
C 192.50.20.0/24 is directly connected, FastEthernet0/0
S 223.0.50.0/24 [1/0] via 12.0.0.2
Router#
Ctrl+F6 to exit CLI focus
Copy
Paste
Top
Router2
Physical Config CLI Attributes
IOS Command Line Interface
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
* - candidate default, U - per-user static route, o - ODR
P - periodic downloaded static route
Gateway of last resort is not set
C 12.0.0.0/8 is directly connected, FastEthernet0/0
C 23.0.0.0/8 is directly connected, FastEthernet1/0
C 24.0.0.0/8 is directly connected, FastEthernet1/1
C 26.0.0.0/8 is directly connected, FastEthernet0/1
S 32.0.0.0/8 [1/0] via 23.0.0.2
S 45.0.0.0/8 [1/0] via 24.0.0.2
S 172.36.0.0/16 [1/0] via 23.0.0.2
[1/0] via 24.0.0.2
S 192.50.20.0/24 [1/0] via 12.0.0.1
S 223.0.50.0/24 [1/0] via 26.0.0.2
Router>
Ctrl+F6 to exit CLI focus
Copy
Top
Router3
Physical Config CLI Attributes
IOS Command Line Interface
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
* - candidate default, U - per-user static route, o - ODR
P - periodic downloaded static route
Gateway of last resort is not set
S 12.0.0.0/8 [1/0] via 23.0.0.1
C 23.0.0.0/8 is directly connected, FastEthernet0/0
S 25.0.0.0/8 [1/0] via 23.0.0.1
C 32.0.0.0/8 is directly connected, FastEthernet0/1
S 45.0.0.0/8 [1/0] via 32.0.0.2
S 172.36.0.0/16 [1/0] via 32.0.0.2
S 192.50.20.0/24 [1/0] via 32.0.0.2
S 223.0.50.0/24 [1/0] via 32.0.0.2
Router#
Ctrl+F6 to exit CLI focus
Copy
Top
Time: 00:27:59
Realtime
Simulation
2811 IOS15
Scenario 0
New
Delete
Toggle PDU List Window
Fire
Last Status
Source
Destination
Type
Color
Time(sec)
Periodic
Num
Edit
Delete
Search
ENG IN
09:52 PM
15-10-2026