HGM

High-pressure Pump

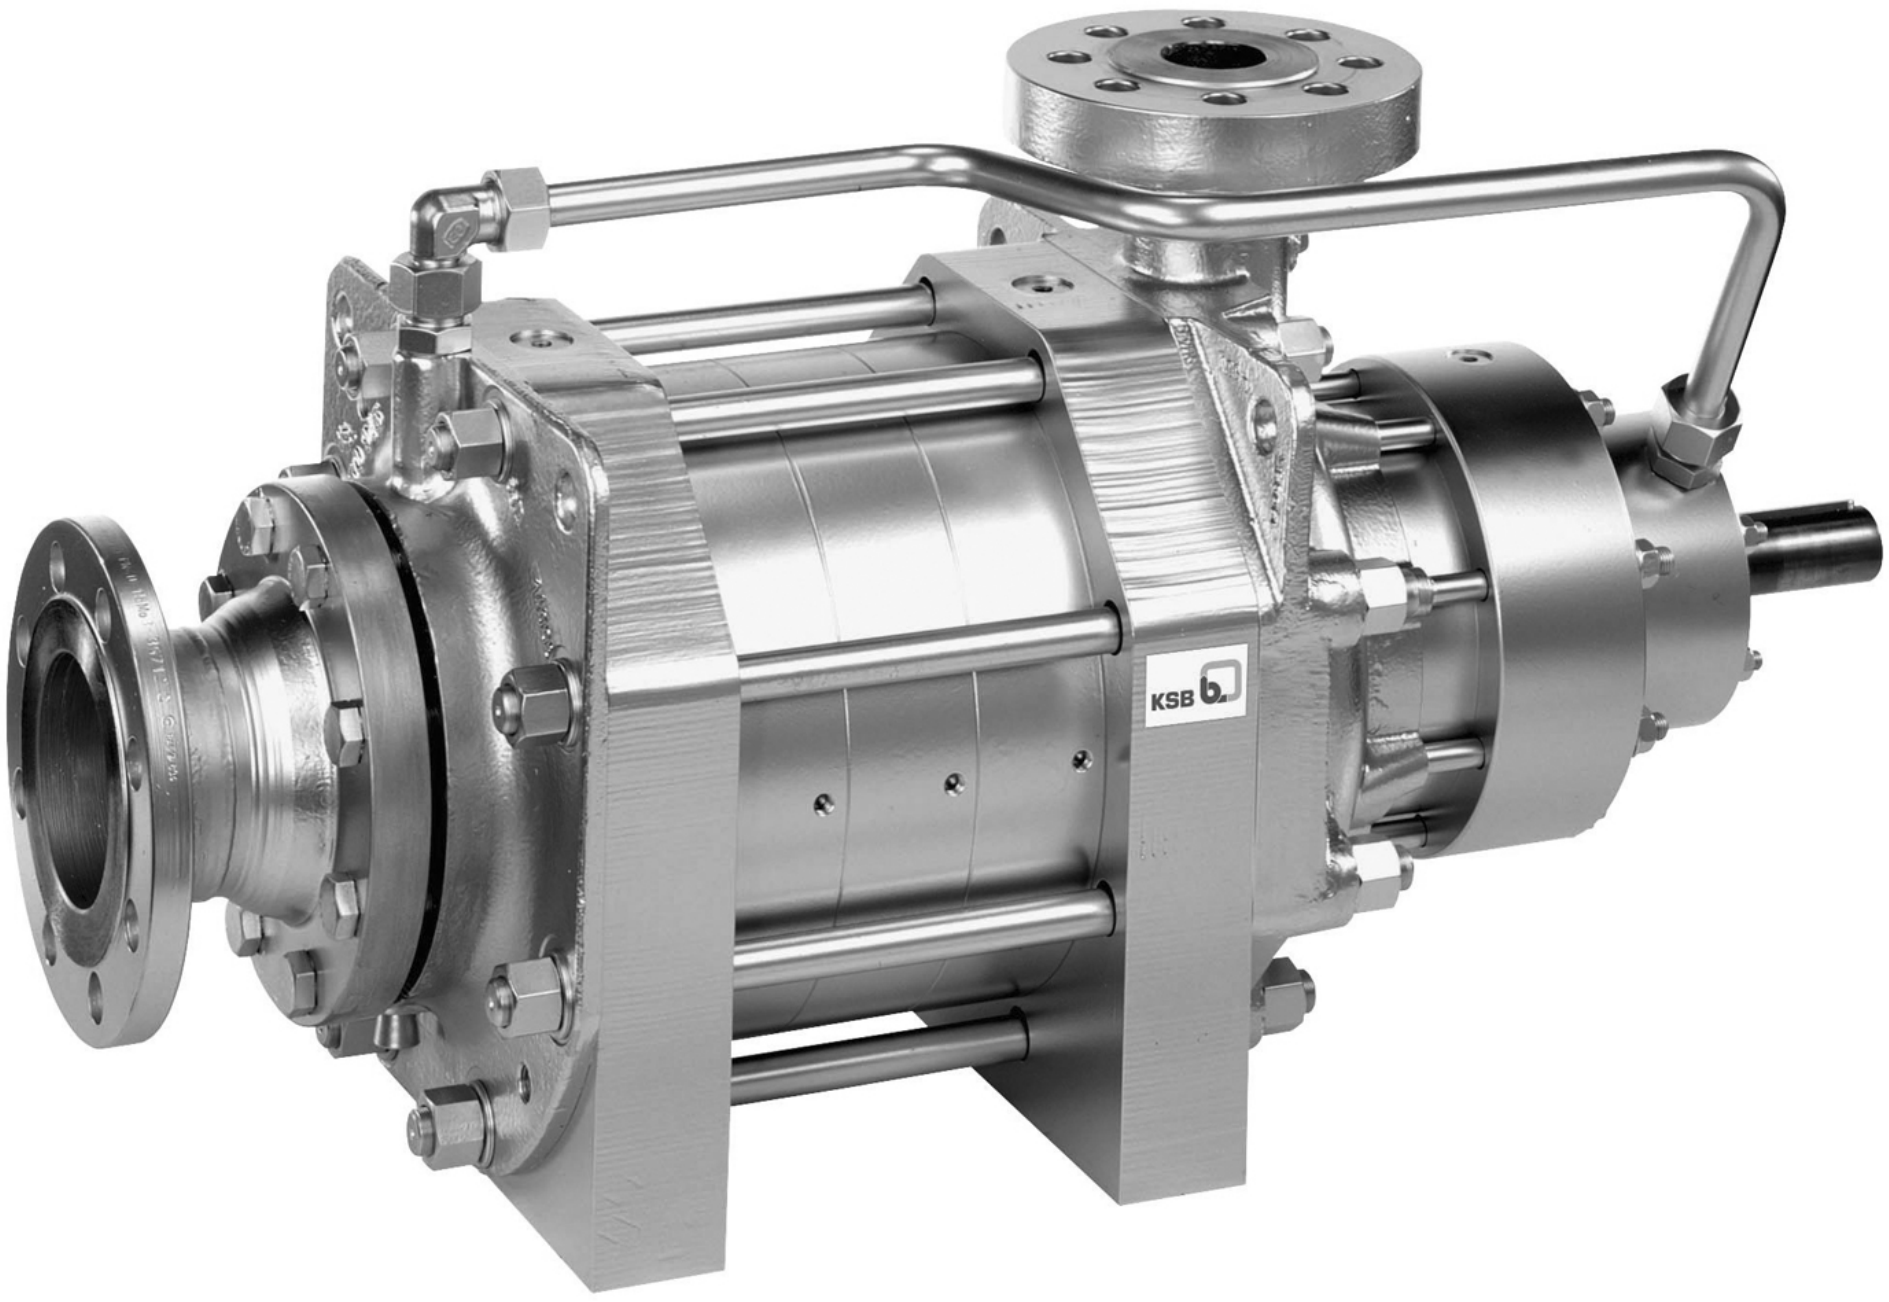

- Pumping feed water in power stations
- Handling cold water
- Boiler feed applications
- Condensate transport

More information
www.ksb.com/en-de

HGM – High-pressure Pump

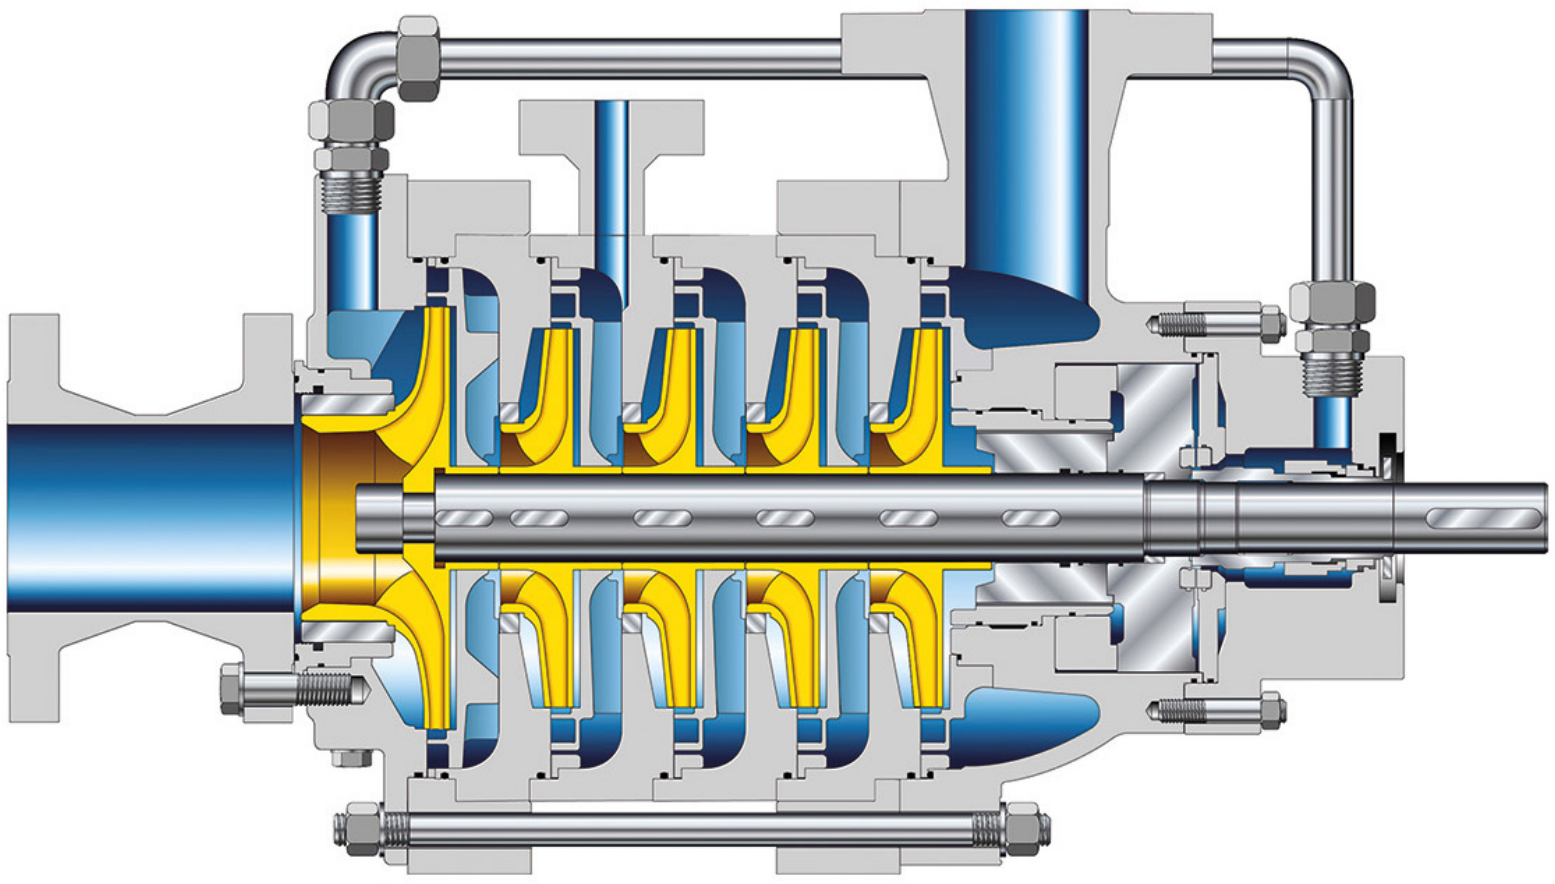

Benefits

Very smooth operation

- Product-lubricated bearings ensure excellent smooth running.

Low NPSH values

- Axial inlet makes for low NPSH values.
- Optimised suction stage impeller in the first stage

No auxiliary systems required

- Cooling water or lubricant are not needed.

Service-friendly

- Designed with ease of service in mind

Optimum matching to customer requirements

- Variety of hydraulic systems enables optimum matching to customer requirements.

Mechanical seal design

- One mechanical seal is sufficient.
- Uncooled operation with standard seal up to 140 °C
- Uncooled operation with special seal up to 160 °C
- Operation up to 160 °C with integrated air cooler
- Special design material variant 8 / direct cooling up to 200 °C for HGM 3 and 4

Materials

Component	Material			
	Variant 3	Variant 4	Variant 7 [1]	Variant 8 [2]
Discharge casing	Stainless steel	Stainless steel	Steel	Stainless steel
Stage casings	Stainless steel	Stainless steel	Steel	Stainless steel
Suction stage impellers	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Impellers	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Diffusers	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Shaft	Steel	Stainless steel	Steel	Stainless steel

1 Combinations available: Variant 7 only for pump sizes 2 and 3

2 Material variant 8 only for HGM 3 and 4

3 At max. permissible speed

Operating data

Characteristic		Value
Flow rate	Q [m³/h]	≤ 390 [3]
	Q [l/s]	≤ 108 [3]
	Q [US.gpm]	≤ 1780 [3]
Head	H [m]	≤ 1400 [3]
	H [ft]	≤ 4593 [3]
Fluid temperature	T [°C]	≤ 200
	T [°F]	≤ 392
Pump inlet pressure	p_s [bar]	≤ 20
	p_s [psi]	≤ 290
Pump discharge pressure	p_d [bar]	≤ 140
	p_d [psi]	≤ 2031
Speed	n [rpm]	≤ 3600

1852.024/02-EN/04.26/

KSB SE & Co. KGaA
Johann-Klein-Straße 9 • 67227 Frankenthal (Germany)
Tel. +49 6233 86-0
www.ksb.com