CHTRa

Axially Split Multistage Between-bearings Pump to API 610

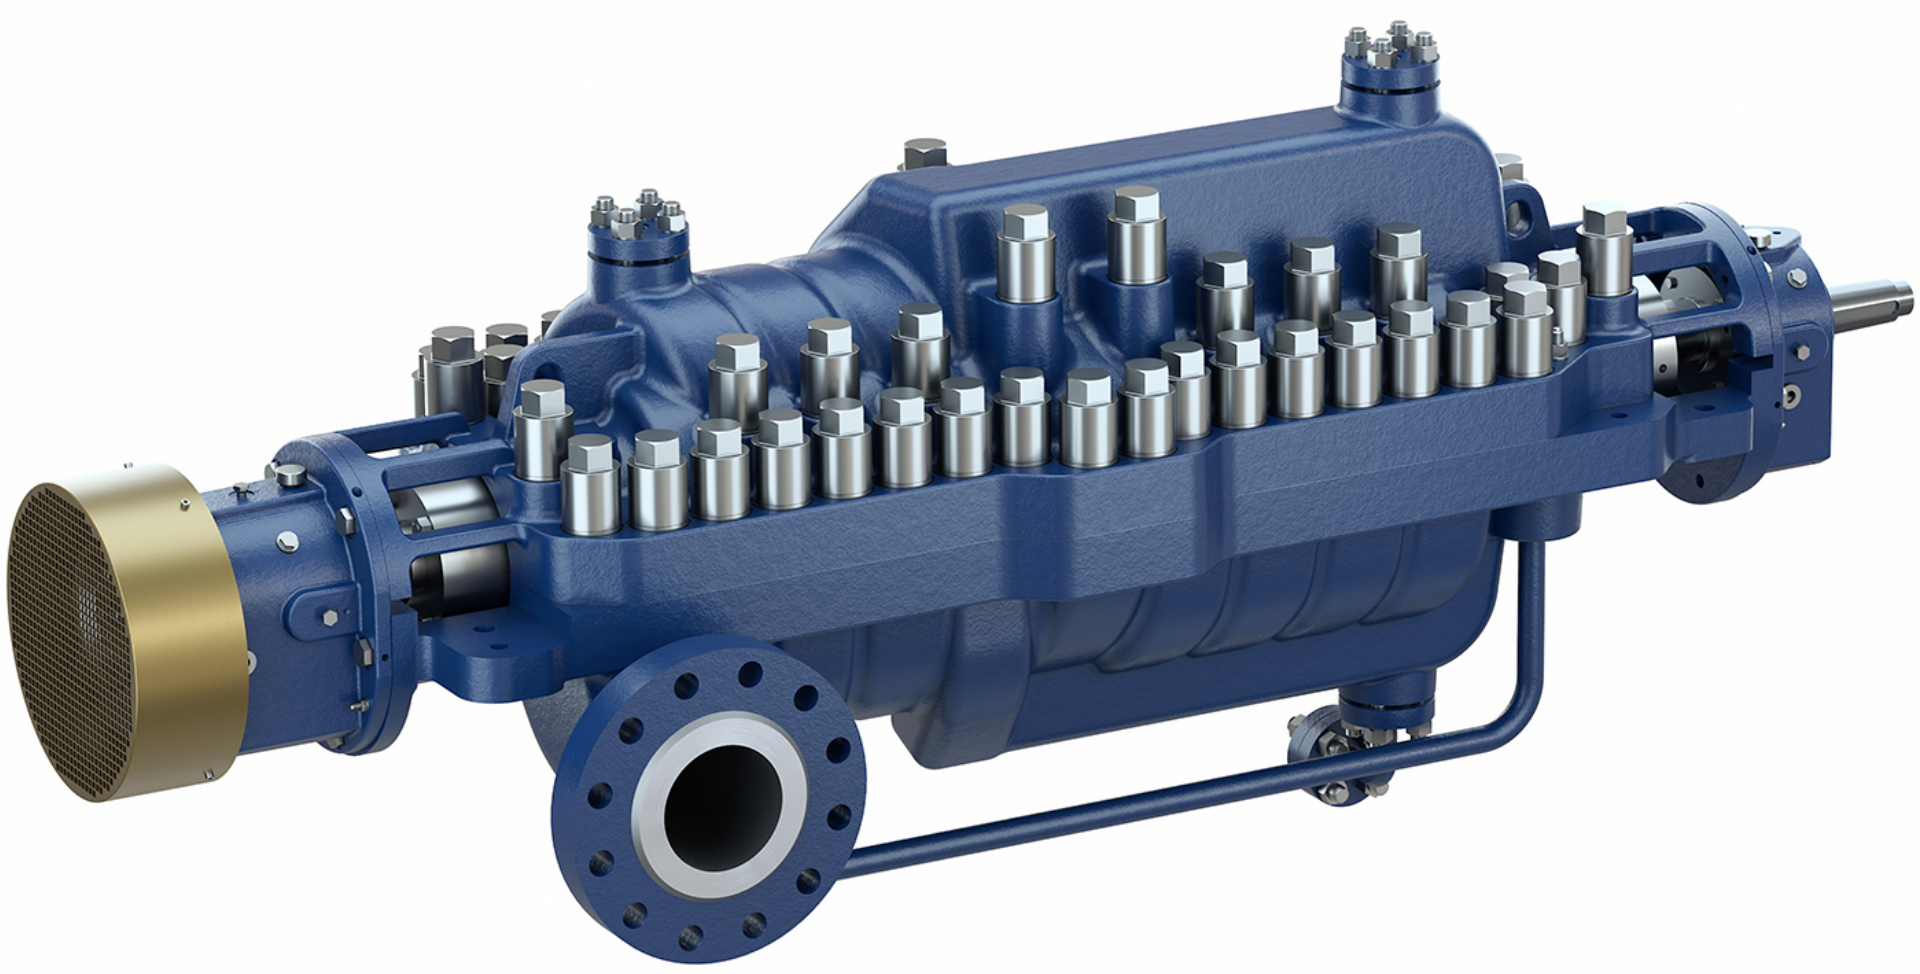

- Oil and gas
- Boiler feed applications
- Water transport
- Waste water management

More information
www.ksb.com/en-gb

CHTRa – Axially Split Multistage Between-bearings Pump to API 610

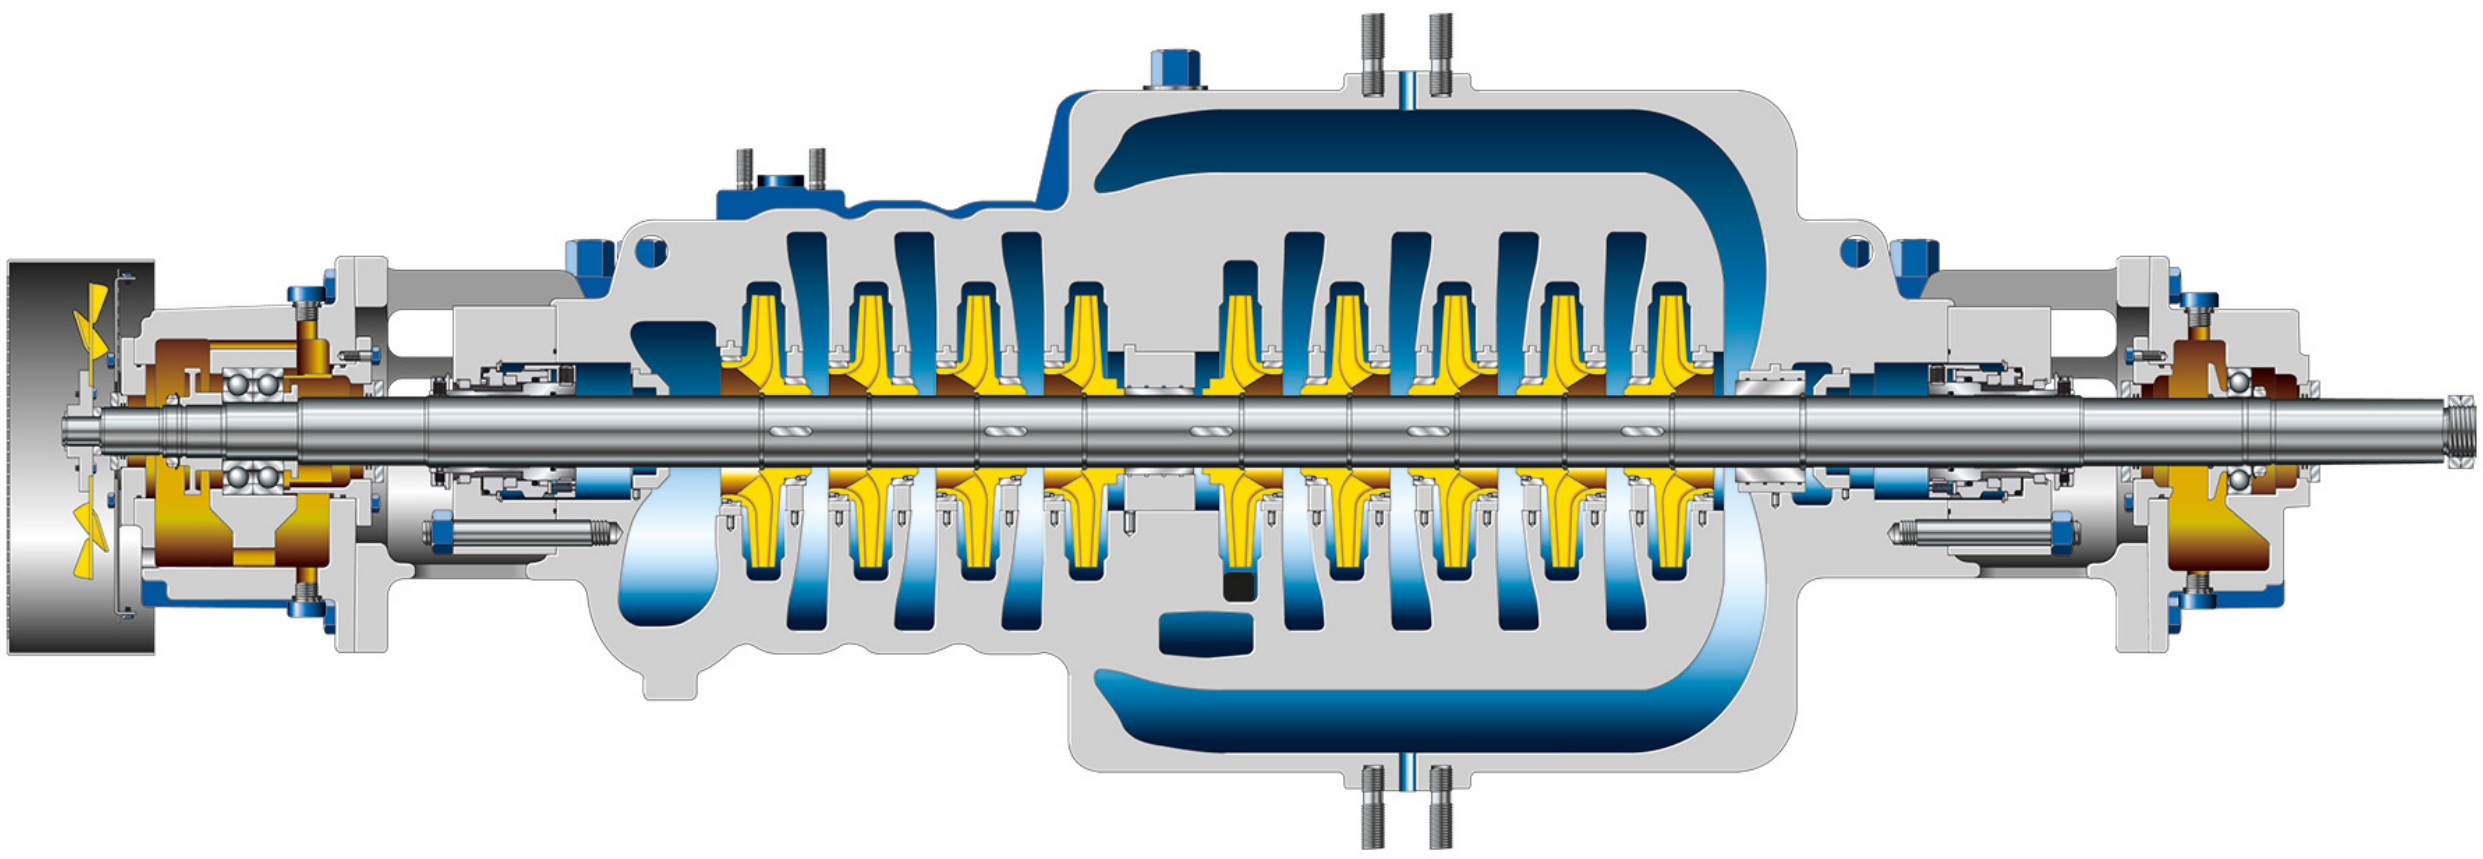

Benefits

■ **Modern design**

- Axially split, multistage, between-bearings pump compliant with the latest API 610 BB3 design requirements
- Available in a range of hydraulic system sizes with numerous stages and material combinations
- Impellers are arranged back-to-back to balance axial thrust.
- Can be supplied with a single-suction or double-suction first stage impeller to suit low-NPSH duties
- Simple construction makes for easy maintenance and excellent reliability.
- Modern machining process ensures uniform flow around the hydraulic profile in the casing.

■ **Integrally flanged auxiliary connections**

- The auxiliary lines do not have to be welded on and supported.

■ **Excellent reliability**

- 360-degree mounting option of the bearing housing minimises vibrations and ensures a long bearing life.
- Rolling element bearings are provided as standard. Plain bearing/rolling element bearing and plain bearing/tilting-pad thrust bearing combinations are available.

■ **Easy maintenance**

- Suction and discharge nozzles are integrally cast in the bottom casing half, eliminating the need to remove pipework during rotor inspection. Nozzle positions can optionally be changed.
- Permissible nozzle loads to API 610
- Heavy-duty ASME B16.5 Class 900 flanges as standard. Higher pressures on request.
- ASME/DIN/ISO/JIS flange options available

Operating data

Characteristic		Value	
		50 Hz	**60 Hz**
Nominal nozzle size (DN)	[mm]	80 - 300	80 -300
Nominal nozzle size (NPS)	[inch]	3 - 12	3 - 12
Flow rate	[m³/h]	≤ 1200	≤ 1400
	[US.gpm]	≤ 5283	≤ 6164
Head	H [m]	≤ 1550	≤ 1550
	H [ft]	≤ 5100	≤ 5100
Fluid temperature	T [°C]	≤ 205	≤ 205
	T [°F]	≤ 400	≤ 400
Max. permissible pressure	[bar]	≤ 155	≤ 155
	[psi]	≤ 2220	≤ 2220
Speed	n [rpm]	≤ 6000	≤ 6000
Specific density (relative density)		≥ 0.7 (down to 0.5 possible on request)	

Other values on request

Materials

■ API 610 material options available as standard

■ NACE and non-metallic wear part variants are available for improved operating reliability and efficiency.

KSB SE & Co. KGaA
Johann-Klein-Straße 9 • 67227 Frankenthal (Germany)
Tel. +49 6233 86-0
www.ksb.com