



Submersible Motor Pump

AmaPorter

DN 50 - DN 80

Single-phase or Three-phase Asynchronous Motor

60 Hz

Type Series Booklet



Legal information/Copyright

Type Series Booklet AmaPorter

All rights reserved. The contents provided herein must neither be distributed, copied, reproduced, edited or processed for any other purpose, nor otherwise transmitted, published or made available to a third party without the manufacturer's express written consent.

Subject to technical modification without prior notice.

© KSB S.A.S, Sequedin, France 2025-08-21

Contents

Drainage Pumps / Grey Water Pumps	4
Submersible Motor Pump	4
AmaPorter	4
Main applications.....	4
Fluids handled	4
Operating data	4
Design details	4
Designation.....	5
Materials	5
Coating and preservation.....	5
Product benefits.....	6
Product information	6
Overview of product features / selection tables	7
Technical data	10
Characteristic curves.....	11
Dimensions and connections.....	18
Installation types.....	31
Installation information.....	32
Scope of supply	36
Accessories	37

Drainage Pumps / Grey Water Pumps

Submersible Motor Pump

AmaPorter



Drive

- Single-phase or three-phase AC asynchronous motor, DOL starting, with integrated temperature switch (depending on pump type), 60 Hz, 230 V | 460 V
- Enclosure IP68 (permanently submerged) to EN/IEC 60529
- Thermal class F

Shaft seal

Drive end:

- Shaft seal ring

Pump end:

- One bi-directional mechanical seal with lip seal or two bi-directional mechanical seals in tandem arrangement (depending on the pump designation), with liquid reservoir

Impeller type

- Various application-oriented impeller types

Bearings

- Maintenance-free, grease-packed bearings sealed for life

Main applications

- Pump station
- Domestic waste water
- Waste water transport
- Draining of pits, shafts, etc.

Fluids handled

- Grey water
- Waste water containing a small amount of solids
- Surface water or stormwater in intermittent periodic duty

Operating data

Table 1: Operating properties

Characteristic		Value
Flow rate	Q [m³/h]	≤ 100,4
	Q [l/s]	≤ 27,9
Head	H [m]	≤ 33,0
Fluid temperature	T [°C]	≤ +40 (continuous duty)
Motor rating	P ₂ [kW]	≤ 4,2

Design details

- Fully floodable submersible motor pump
- Close-coupled design
- Single-stage
- Not self-priming
- Vertical installation

Installation

- Wet-installed stationary model
- Wet-installed transportable model

Designation

Example: AmaPorter F 501 SE

Table 2: Designation key

Code	Description	
AmaPorter	Type series	
F	Impeller type	
	F	Vortex impeller
5	Size	
	5..	DN 50
	6..	DN 65
	8..	DN 80
01	Code nominal impeller diameter [mm]	
	01	110 mm
SE	Motor version	
	SE	Single-phase AC motor with float switch
	NE	Single-phase AC motor without float switch
	ND	Three-phase asynchronous motor without float switch

Materials

Table 3: Overview of available materials

Component		AmaPorter F 50.. / 60..	AmaPorter F 51_ / 52_ / 61_ / 62_ / 82_
Casing		EN-GJL-200	EN-GJL-250
Impeller			
Cutter		-	
Shaft		1.4021 + QT800	
Shaft seal, drive end			
	Shaft seal ring	X	-
	Mechanical seal	-	Carbon / Al ₂ O ₃
Shaft seal, pump end			
	Mechanical seal	SiC / SiC	
Bolts and nuts		A2	
Joint rings		Nitrile butadiene rubber (NBR70)	
Float switch		Polypropylene	-

Coating and preservation

Primer and top coat

Surface treatment:

- Blasted to SA 2 1/2 to DIN EN ISO 12944

Top coat:

- Two-component epoxy paint (RAL 5002), minimum film thickness = 80 µm

Product benefits

- High operating reliability, even under tough operating conditions, due to generously sized motor and thermal overload protection
- Long service life with shaft made of corrosion-resistant stainless steel and one or two bi-directional mechanical seals
- Trouble-free operation: Clogging by coarse particles is prevented by large free passage (vortex impeller) or by cutter with high mechanical resistance for grey water.
- Stationary pump sets easy to install and remove with automatic, bolt-free connection; leakage prevented by elastic sealing elements
- Ease of service with wetted bolts made of stainless steel which are easy to undo even after years of operation

Product information

Product information as per Regulation No. 1907/2006 (REACH)

For information as per European chemicals regulation (EC) No. 1907/2006 (REACH) see <https://www.ksb.com/en-global/company/corporate-responsibility/reach>.

Overview of product features / selection tables
Overview of range
Table 4: Standard design variants

Size	F impeller				
	AmaPorter F 50_ / 60_ (vortex impeller)			AmaPorter F 51_ / 52_ / 61_	AmaPorter F 62_ / 82_
Motor version	SE	NE	ND	ND	
Material variant	G				
Number of motor poles					
2-pole	X	X	X	X	-
4-pole	-	-	-	-	X
Explosion protection					
Motor version UL	Non-explosion-proof				
Motor					
Starting method	DOL			DOL	
Frequency of starts/hour	15			30	
Voltage	1~230 V	1~230 V	3~380-460 V	380 V	
Cooling	Cooled by surrounding fluid				
Duty type	Continuous duty S1 (permanently submerged, 5 m max.)			S1: submerged (max. 25 m) (see ²⁾ in outline drawing) S3: unsubmerged (see ¹⁾ in outline drawing)	
Power cable					
Type	Rubber-sheathed cable (H07RN8-F 3G1)		Rubber-sheathed cable (H07RN8-F 4G1)	Rubber-sheathed cable (H07RN8-F 8G1.5)	
Length	10 m				
Cable entry	Absolutely watertight				
Sealing elements					
Shaft seal	Drive end: shaft seal ring Pump end: mechanical seal			Drive end: mechanical seal Pump end: mechanical seal	
Elastomer seals	NBR				
Monitoring equipment					
Winding temperature version UL	Thermal motor protection		-	Temperature monitoring circuit (with automatic reset and start-up): Bimetal switch directly connected with the control circuit of the motor contactor	
Coating	Environmentally friendly KSB top coat (two-component epoxy paint), colour RAL 5002, film thickness = 80 µm				
Installation					
Stationary, with guide hoop arrangement	Installation depths 1.5 m / 1.8 m / 2.1 m				
Stationary, with single guide rail arrangement	Installation depth 6 m				
Stationary, with twin guide rail arrangement	Installation depth 6 m				
Stationary, with guide wire arrangement	Installation depth 4.5 m				
Transportable	Installation depth 14.5 m				
Maximum temperature of fluid handled					
Motor version UL	≤ +40 °C (+70 °C for short periods)			40 °C	

Impeller

	Free-flow impeller (impeller type F)	Suitable for the following fluids: fluids containing solids and stringy material as well as fluids with entrapped air or entrapped gas
---	--------------------------------------	--

Overview of fluids handled

The table below for your guidance is based on KSB's long-standing experience. The data are standard values and are not to be considered as generally binding recommendations. More detailed advice is available from our specialist department. The KSB materials laboratory's wealth of experience may be useful when selecting materials.

Table 5: Selection aid for materials and hydraulic systems per fluid

Fluid handled ¹⁾	Recommen- ded material	Recommen- ded impeller type ²⁾	Recommen- ded sealing elements	Comments, further recommenda- tions
Water, surface water				
▪ Dam water	G	F	NBR	Free passage > any solids contained, possibly pre-screened
▪ Lake water	G	F	NBR	Free passage > any solids contained, possibly pre-screened
▪ River water	G	F	NBR	Free passage > any solids contained, possibly pre-screened
Water, contaminated water				
▪ Combined sewage, with strainer	G	F	NBR	-
▪ Combined sewage, without strainer	G	F	NBR	-
▪ Slightly contaminated water	G	F	NBR	Free passage > any solids contained, possibly pre-screened
▪ Waste water with faeces	G	F	NBR	EN 12050, min. free passage of 40 mm
▪ Waste water without faeces	G	F	NBR	-
Municipal waste water				
▪ Biologically treated	G	F	NBR	-
▪ Containing air and gas	G	F	NBR	Up to 8 %; contact KSB for higher concentra- tions.
▪ Domestic waste water with faeces	G	F	NBR	EN 12050, min. free passage of 40 mm
▪ Domestic waste water without faeces	G	F	NBR	-
▪ Pumped drainage	G	F	NBR	-
▪ Raw waste water containing solids, long fibres and abrasive particles	G	F	NBR	Free passage > any solids contained, possibly pre-screened
▪ Untreated	G	F	NBR	ATV ³⁾ recommends a free passage of 100 mm; min. free passage: 76 mm
Water, raw water				
▪ No details specified	G	F	NBR	-
Non-abrasive, non-corrosive industrial waste water⁴⁾				
▪ Industrial waste water with faeces	G	F	NBR	-
▪ Industrial waste water without faeces	G	F	NBR	-
▪ Ammonium hydroxide	G	F	NBR	-
▪ Containing up to 5 % of ammonium hydroxide	G	F	NBR	-
▪ Containing 5 % of calcium hydroxide Ca(OH) ₂	G	F	NBR	-
▪ Containing 10 % of dissolved carbonate Na ₂ CO ₃	G	F	NBR	-
▪ Containing fibres	G	F	NBR	-
▪ Containing paint suspension	G	F	NBR	Solvent-free, observe the operator's instruc- tions.
▪ Containing 25 % of urea (NH ₂) ₂ -CO	G	F	NBR	-
Suspensions containing solids				
▪ Pulp, concentration up to 1 % bone dry	G	F	NBR	-

1 For any fluids which are not listed in this table contact the manufacturer.

2 The first impeller type listed should be given preference.

3 ATV = German regulatory body for waste water management

4 The hydrocarbons mentioned may occur in very high concentrations due to the difference in specific weight and their low solubility. If this is the case, contact KSB.

Fluid handled ¹⁾	Recommen- ded material	Recommen- ded impeller type ²⁾	Recommen- ded sealing elements	Comments, further recommenda- tions
▪ Pulp, concentration up to 6 % bone dry	G	F	NBR	-
▪ Water/sand mixture up to 0.5 g/l	G	F	NBR	-
Sludges				
▪ Raw sludge	G	F	NBR	Pumpable up to a dry substance content of: 13 % (D-max), 8 % (F)
▪ Digested sludge	G	F	NBR	Pumpable up to a dry substance content of: 13 % (D-max), 8 % (F)
▪ Activated sludge	G	F	NBR	Pumpable up to a dry substance content of: 13 % (D-max), 8 % (F)

Technical data
AmaPorter
Table 6: Overview of technical data

Size	Voltage			Leakage sensor		Impeller diameter	Free passage	P ₁	P ₂	I _N	I _A	Power cable	Mat. No.	[kg]
	1~230 V	3~380-460 V	3~380 V	Without	With	[mm]	[mm]	[kW]	[kW]	[A]	[A]	[mm ²]		
500 SE	✗	-	-	✗	-	100	45	1,90	1,10	8,2	25,0	3G1	39017142	24
501 SE	✗	-	-	✗	-	110	45	1,90	1,10	8,2	25,0	3G1	39017803	24
500 NE	✗	-	-	✗	-	100	45	1,90	1,10	8,2	25,0	3G1	39017699	24
501 NE	✗	-	-	✗	-	110	45	1,90	1,10	8,2	25,0	3G1	39017804	24
500 ND	-	✗	-	✗	-	100	45	1,50	1,10	2,8	20,4	4G1	39017143	24
501 ND	-	✗	-	✗	-	110	45	1,90	1,50	3,5	20,0	4G1	39017144	24
510 ND	-	-	✗	-	✗	90	40	1,96	1,30	3,4	33,0	8G1,5	39100445	41
511 ND	-	-	✗	-	✗	107	40	3,26	2,30	4,8	33,0	8G1,5	39100446	41
520 ND	-	-	✗	-	✗	110	40	3,91	2,80	6,2	55,0	8G1,5	39100447	51
521 ND	-	-	✗	-	✗	120	40	5,60	4,10	8,1	55,0	8G1,5	39100448	51
522 ND	-	-	✗	-	✗	130	40	5,60	4,10	8,1	55,0	8G1,5	39100449	52
523 ND	-	-	✗	-	✗	140	40	5,60	4,10	8,1	55,0	8G1,5	39100450	52
600 SE	✗	-	-	✗	-	100	60	1,90	1,10	8,2	25,0	3G1	39017145	28
601 SE	✗	-	-	✗	-	110	60	1,90	1,10	8,2	25,0	3G1	39017805	28
600 NE	✗	-	-	✗	-	100	60	1,90	1,10	8,2	25,0	3G1	39017700	28
601 NE	✗	-	-	✗	-	110	60	1,90	1,10	8,2	25,0	3G1	39017806	28
600 ND	-	✗	-	✗	-	100	60	1,50	1,10	2,8	20,4	4G1	39017146	29
601 ND	-	✗	-	✗	-	110	60	1,90	1,50	3,5	20,0	4G1	39017147	29
610 ND	-	-	✗	-	✗	112	65	3,91	2,80	6,2	55,0	8G1,5	39100451	57
611 ND	-	-	✗	-	✗	120	65	5,60	4,10	8,1	55,0	8G1,5	39100452	58
612 ND	-	-	✗	-	✗	128	65	5,60	4,10	8,1	55,0	8G1,5	39100453	58
613 ND	-	-	✗	-	✗	136	65	5,60	4,10	8,1	55,0	8G1,5	39100454	59
622 ND	-	-	✗	-	✗	135	65	1,42	0,80	2,8	21,0	8G1,5	39100455	49
623 ND	-	-	✗	-	✗	145	65	1,98	1,30	3,3	21,0	8G1,5	39100456	49
624 ND	-	-	✗	-	✗	155	65	1,98	1,30	3,3	21,0	8G1,5	39100457	49
625 ND	-	-	✗	-	✗	165	65	2,69	1,80	4,0	21,0	8G1,5	39100458	50
626 ND	-	-	✗	-	✗	175	65	2,69	1,80	4,0	21,0	8G1,5	39100459	50
820 ND	-	-	✗	-	✗	120	76	3,05	2,20	5,6	49,0	8G1,5	39100460	62
821 ND	-	-	✗	-	✗	135	76	3,05	2,20	5,6	49,0	8G1,5	39100461	63
822 ND	-	-	✗	-	✗	150	76	5,12	3,70	7,6	49,0	8G1,5	39100462	63
823 ND	-	-	✗	-	✗	165	76	5,12	3,70	7,6	49,0	8G1,5	39100463	64
824 ND	-	-	✗	-	✗	180	76	5,12	3,70	7,6	49,0	8G1,5	39100464	64

Characteristic curves

AmaPorter F 50_, n = 3500 rpm

Characteristic curves to ISO 9906 Class 2A / 3B, below 10 kW to § 4.4.2. The characteristic curves refer to the effective motor speed.

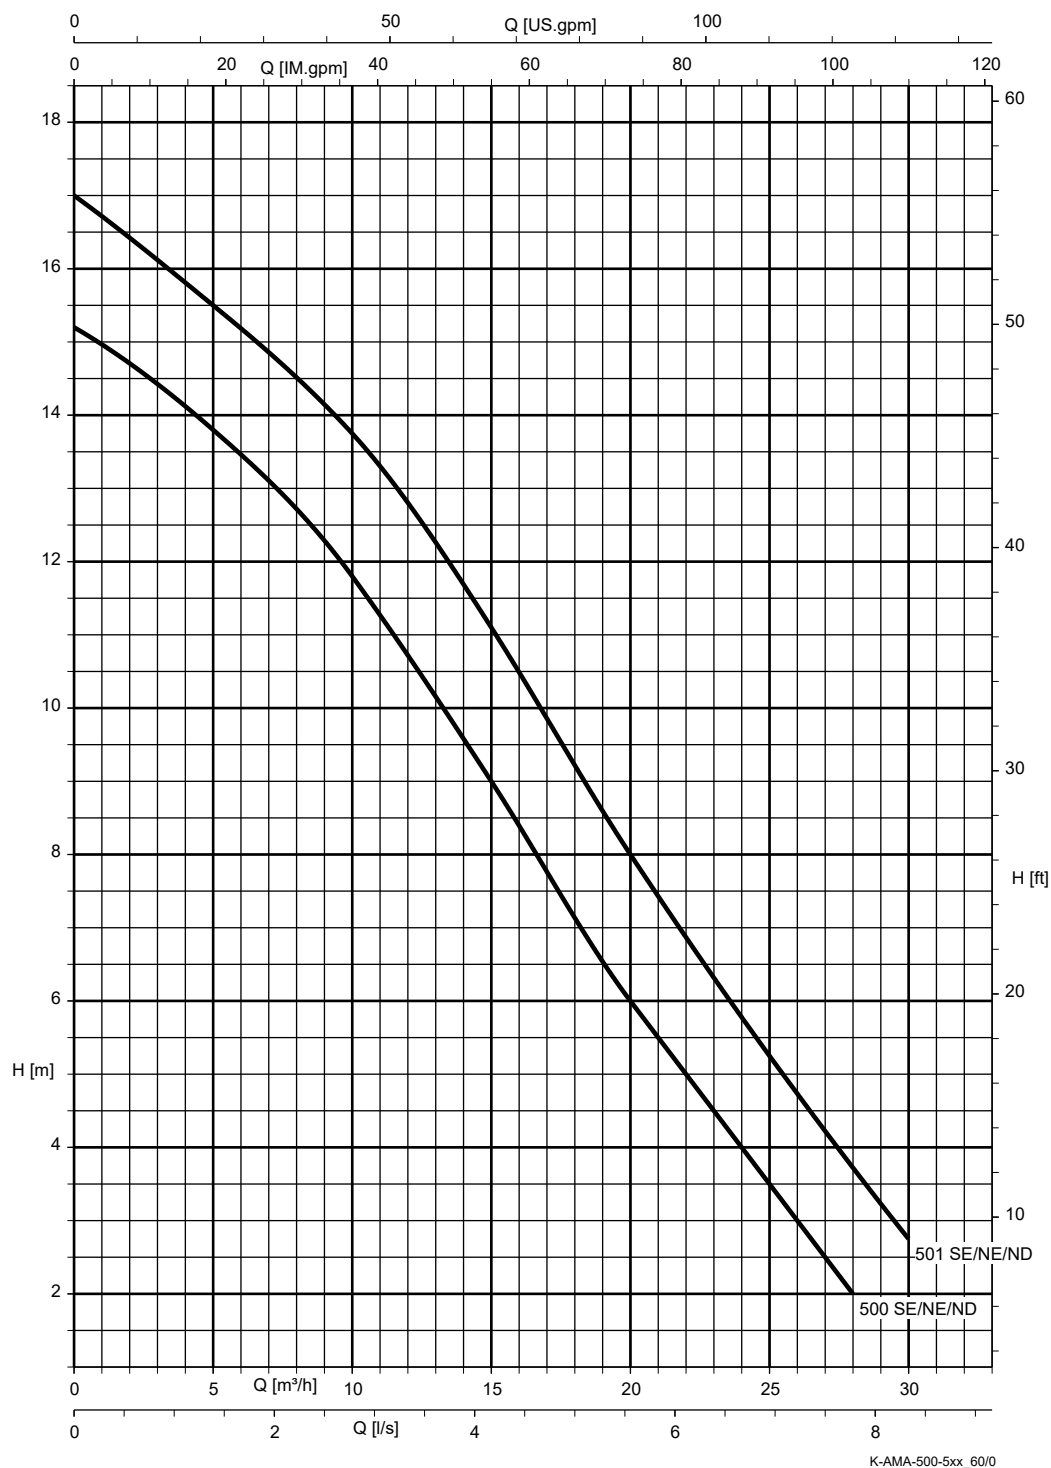


Fig. 1: Free passage:
Size 500: 45 mm
Size 501: 45 mm

AmaPorter F 51, $n = 3500$ rpm

Characteristic curves to ISO 9906 Class 2A / 3B, below 10 kW to § 4.4.2. The characteristic curves refer to the effective motor speed.

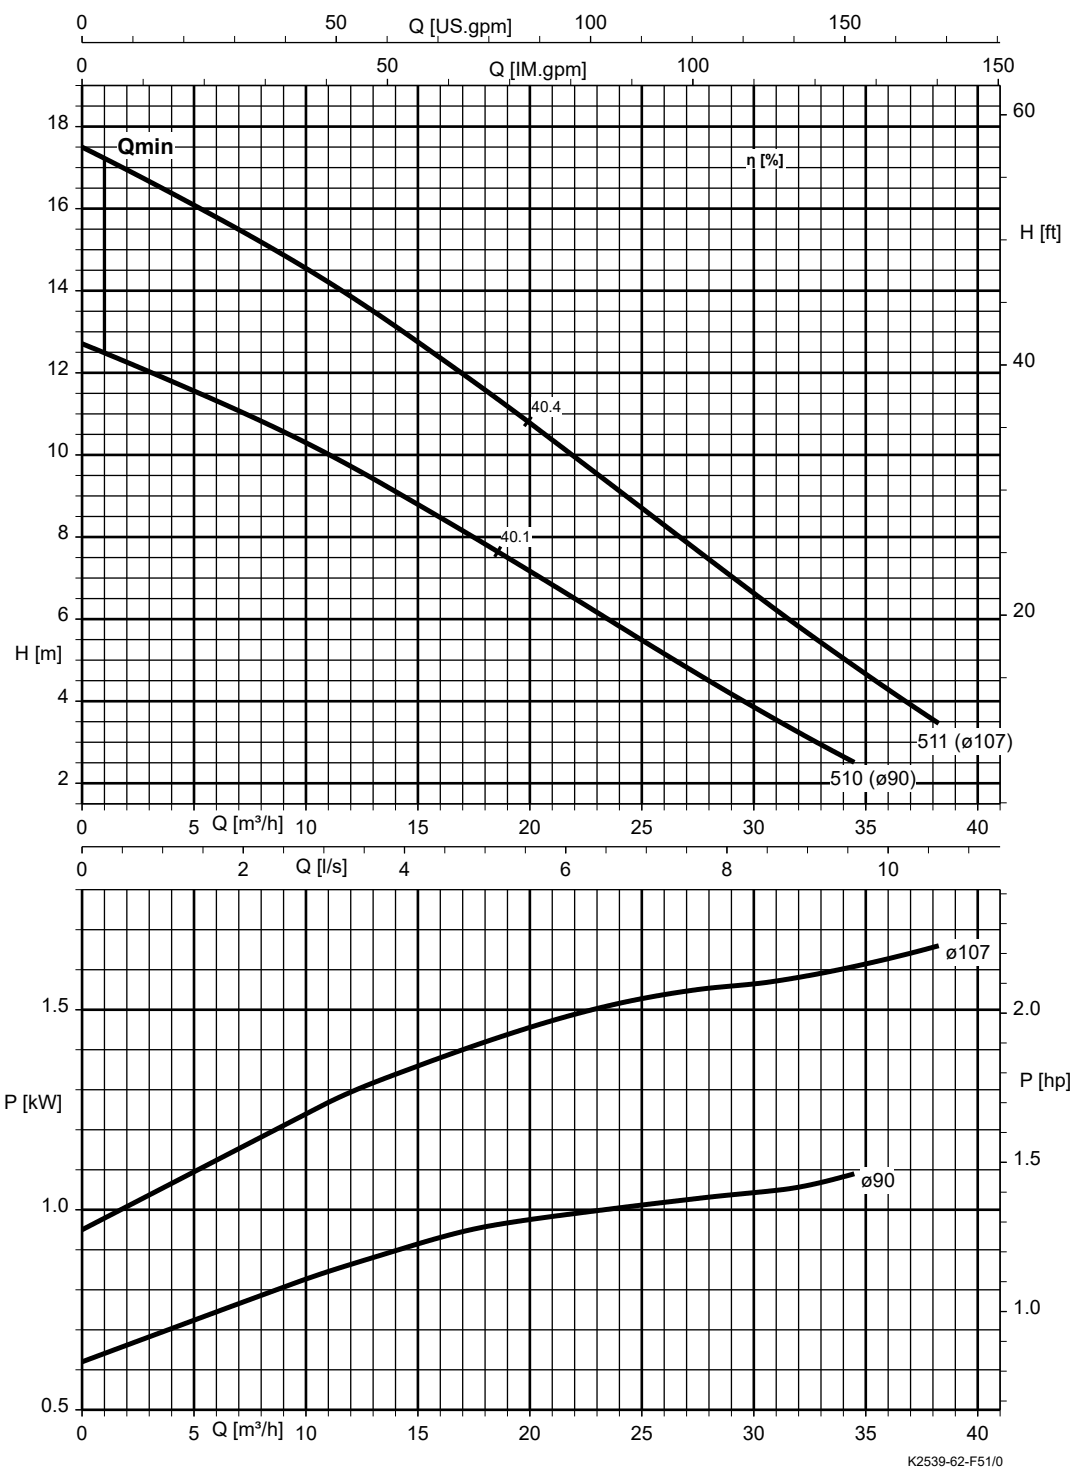


Fig. 2: Free passage : F 51_L = 40 mm

AmaPorter F 52_ n = 3500 rpm

Characteristic curves to ISO 9906 Class 2A / 3B, below 10 kW to § 4.4.2. The characteristic curves refer to the effective motor speed.

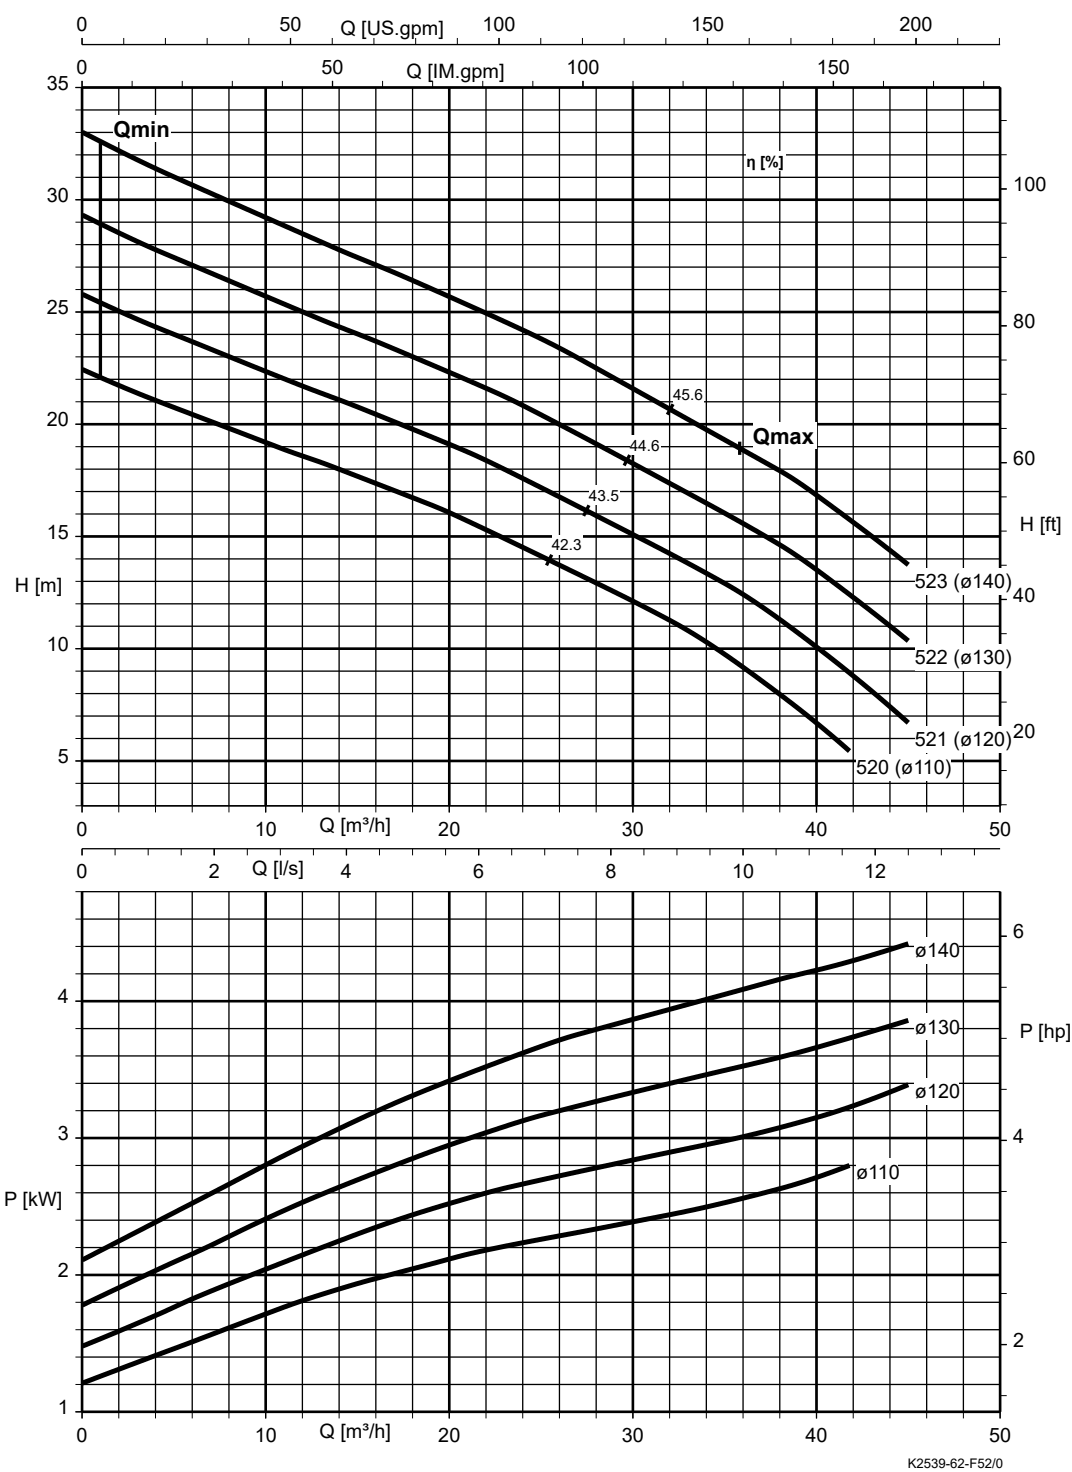


Fig. 3: Free passage : F 52_ = 40 mm

AmaPorter F 60, n = 3500 rpm

Characteristic curves to ISO 9906 Class 2A / 3B, below 10 kW to § 4.4.2. The characteristic curves refer to the effective motor speed.

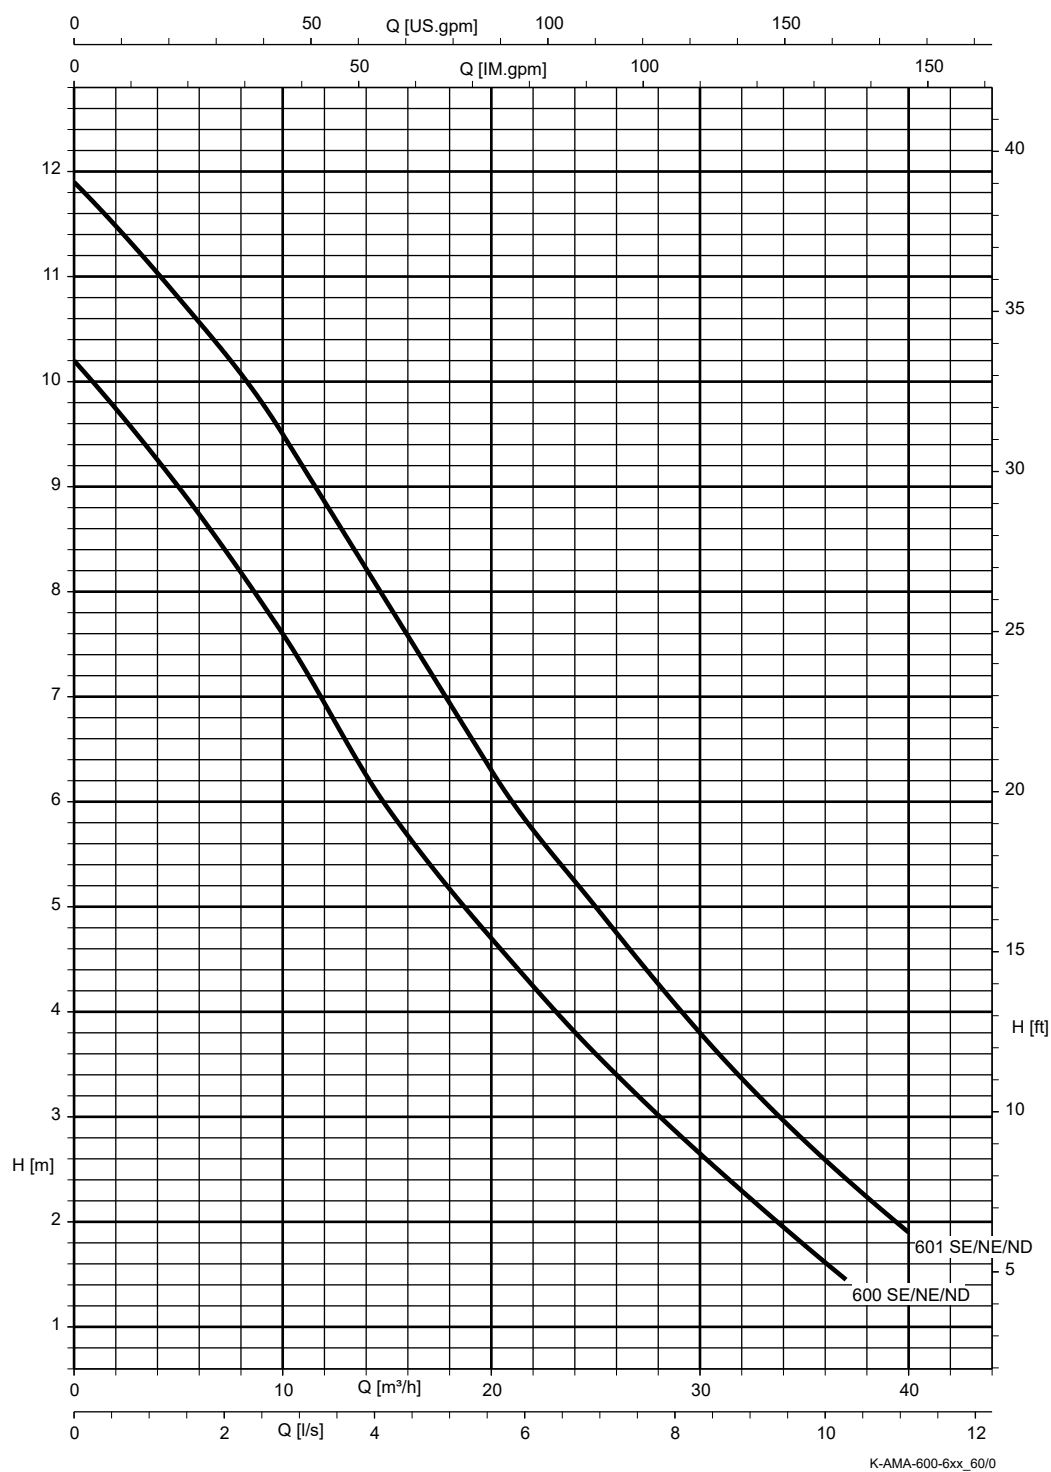


Fig. 4: Free passage:
Size 600: 60 mm
Size 601: 60 mm

AmaPorter F 61_ n = 3500 rpm

Characteristic curves to ISO 9906 Class 2A / 3B, below 10 kW to § 4.4.2. The characteristic curves refer to the effective motor speed.

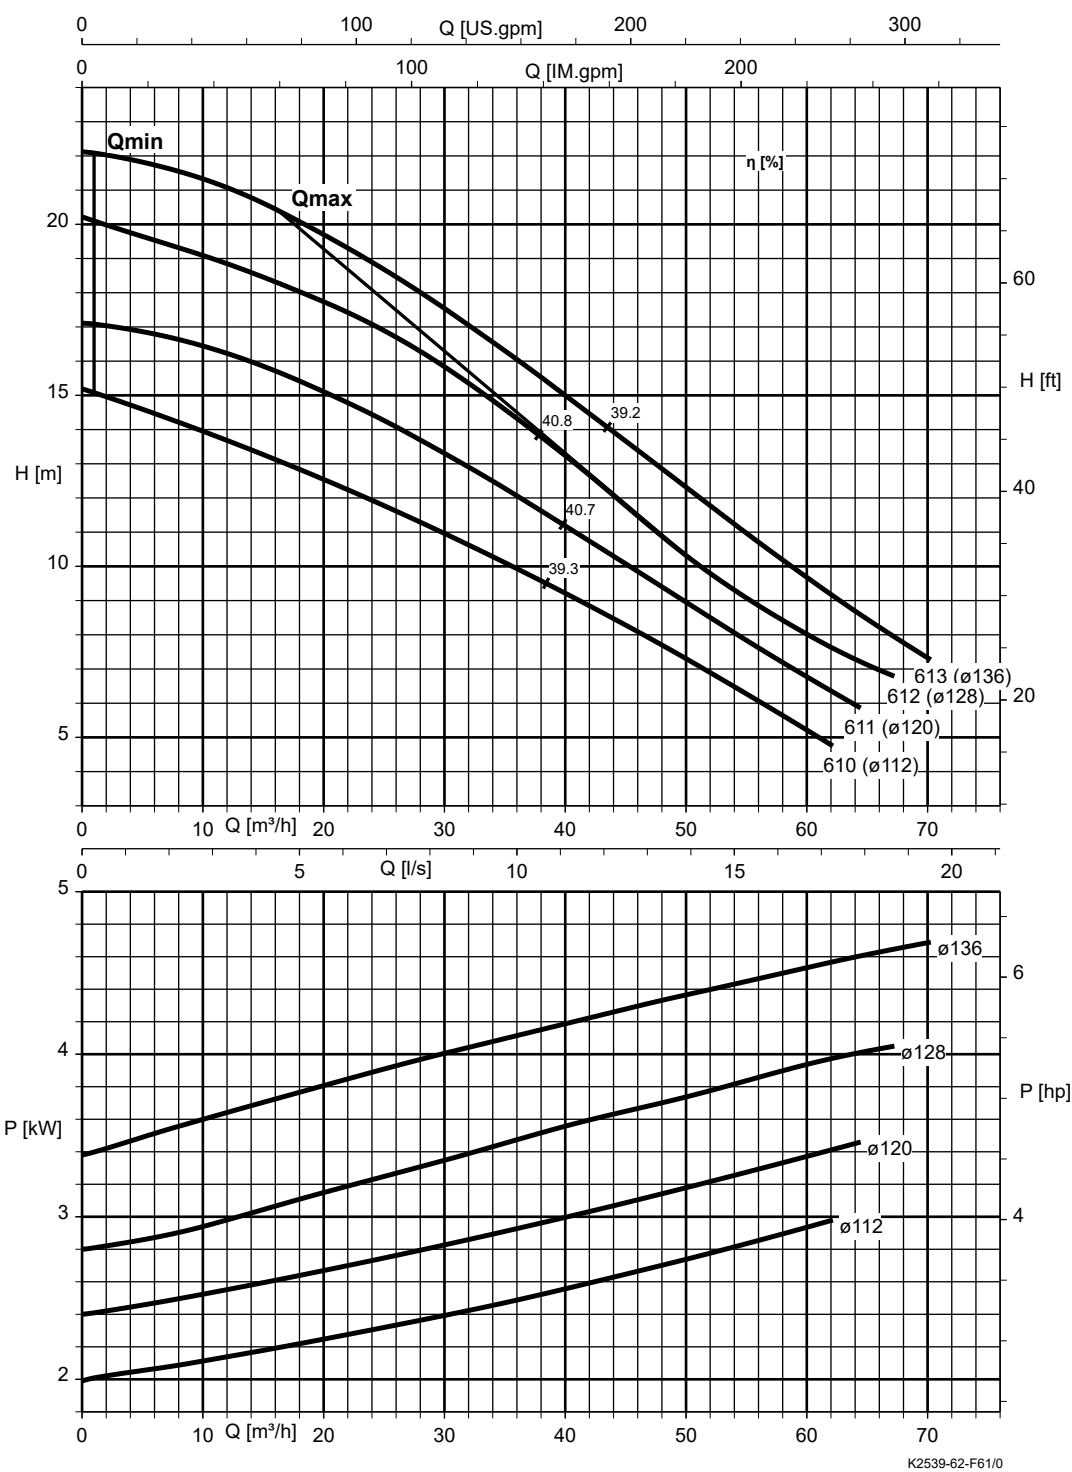


Fig. 5: Free passage: F 61_ = 65 mm

AmaPorter F 62_ n = 1750 rpm

Characteristic curves to ISO 9906 Class 2A / 3B, below 10 kW to § 4.4.2. The characteristic curves refer to the effective motor speed.

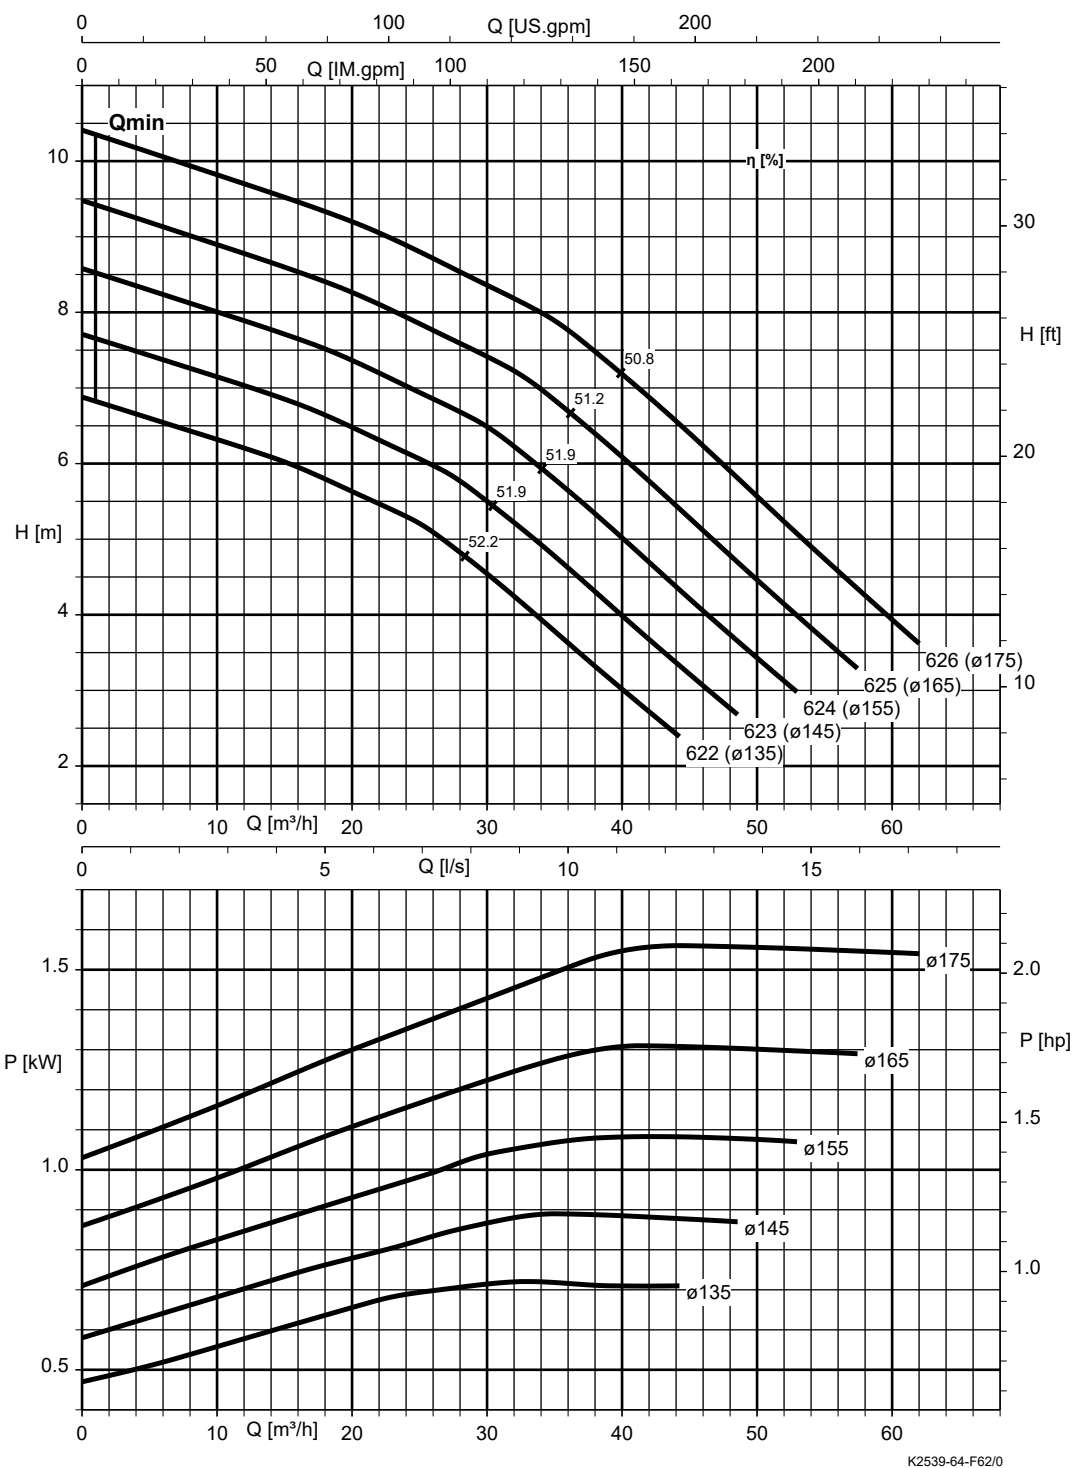


Fig. 6: Free passage: F 62_ = 65 mm

AmaPorter F 82_ n = 1750 rpm

Characteristic curves to ISO 9906 Class 2A / 3B, below 10 kW to § 4.4.2. The characteristic curves refer to the effective motor speed.


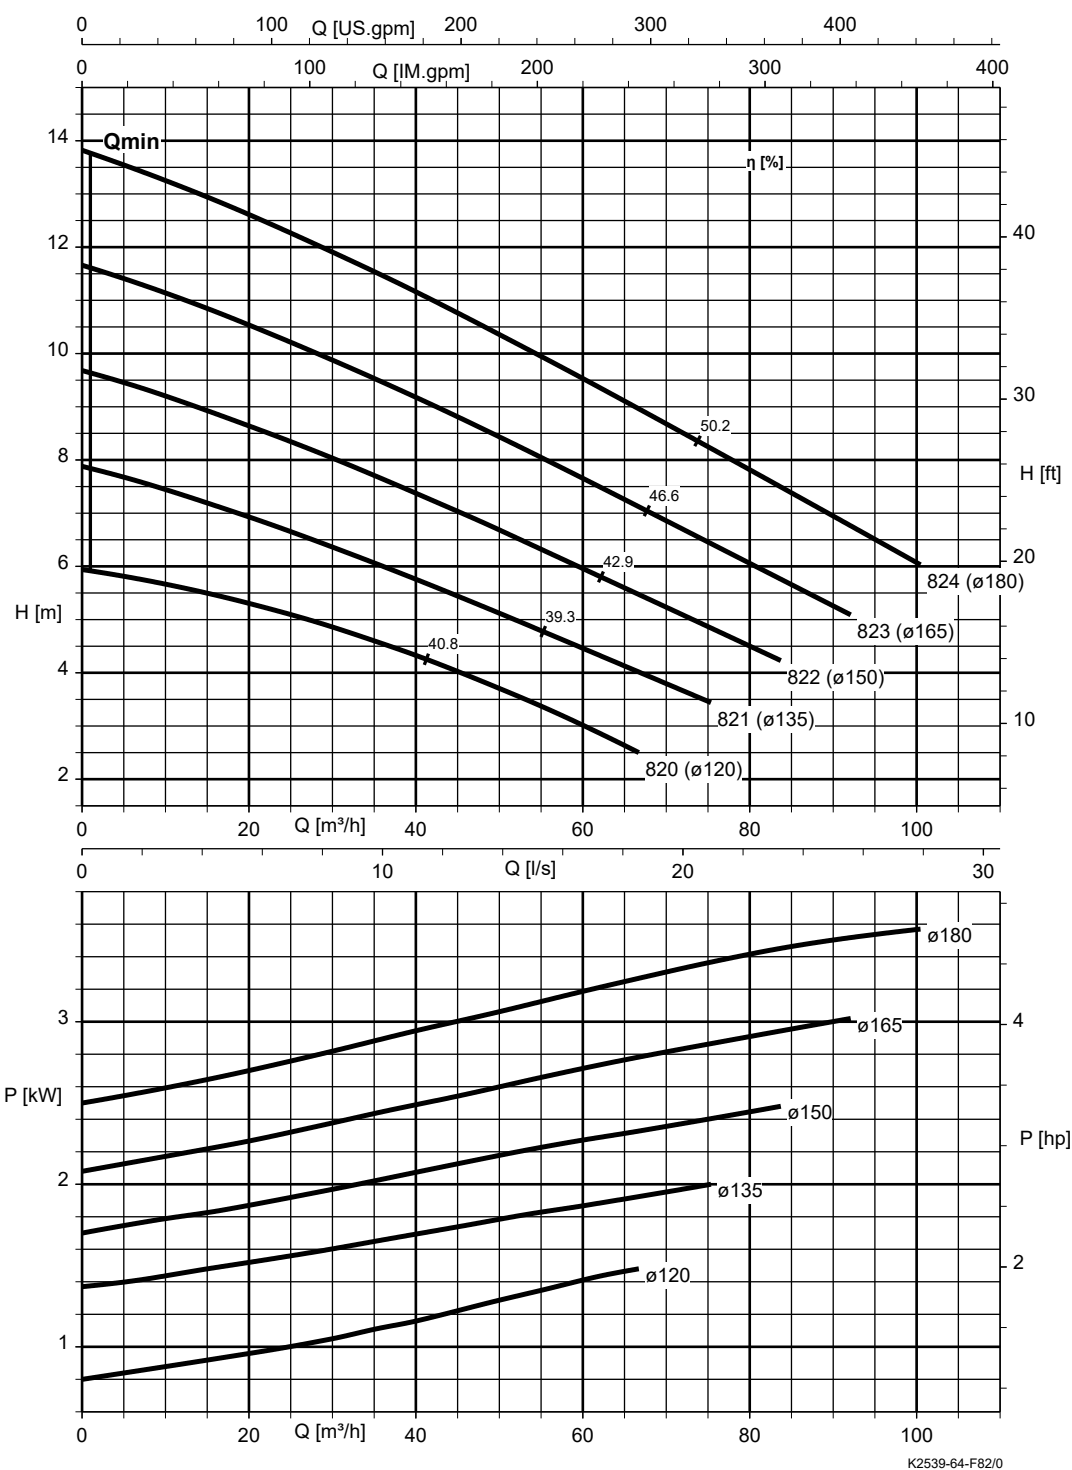


Fig. 7: Free passage: F 82_ = 76 mm

Dimensions and connections

AmaPorter DN 50/65/80, transportable model

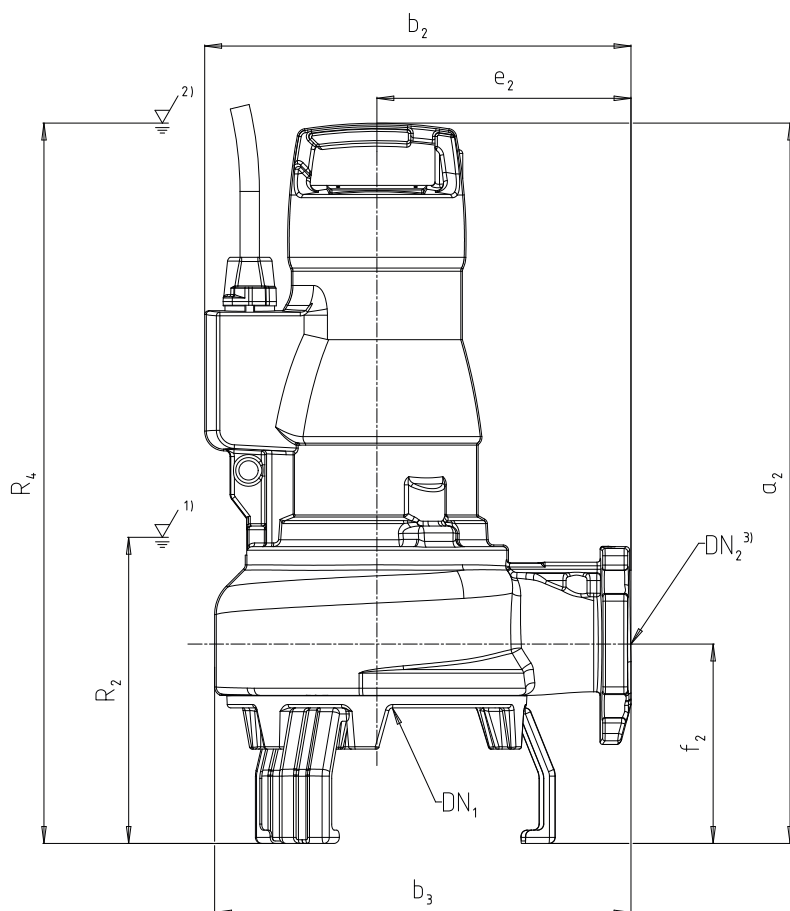

UG2059972

Fig. 8: AmaPorter F dimensions and connections

1)	Lowest stop level for automatic operation
2)	Minimum submergence for continuous operation
3)	Connection of elbow with fasteners and clamp, for sizes 50_/60_ consider adapter piece for hose in addition

Table 7: Pump set dimensions [mm]

Size	DN ₁	DN ₂	a ₂	b ₂	b ₃	e ₂	f ₂	R ₂	R ₄
F 50_	44	50	393	248	218	120	125	160	393
F 51_	42	50	549	323	295	180	154	207	549
F 52_	42	50	610	337	308	180	157	203	610
F 60_	59	65	408	278	263	150	132	170	408
F 61_	65	65	655	367	335	210	166	248	655
F 62_	65	65	596	353	345	210	165	253	596
F 82_	80	80	674	387	392	230	189	249	674

AmaPorter F can be installed with an additional footplate. In this case, add 15 mm to a₂ and f₂.

Pump flange

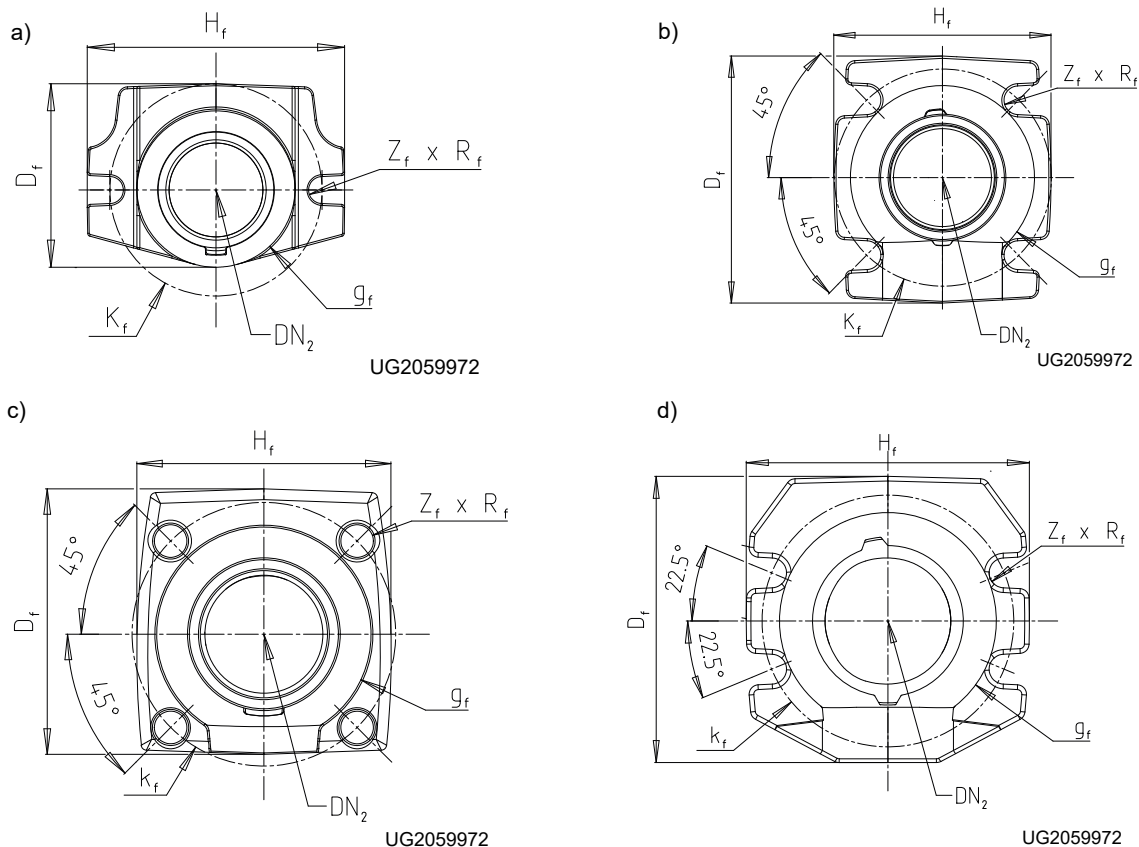


Fig. 9: Pump flange dimensions

a)	AmaPorter F 50_	b)	AmaPorter F 51_/52_/61_/62_
c)	AmaPorter F 60_	d)	AmaPorter F 82_

Table 8: Pump flange dimensions [mm]

Size	DN ₂	ISO 7005/DIN 2501	g _f	k _f	D _f	H _f	Z _f	R _f
F 50_	50	PN 6	82	110	95	134	2	7
F 51_/52_	50	PN 16	99	124	140	125	4	9,5
F 60_	65	PN 16	118	145	146	140	4	9
F 61_/62_	65	PN 16	122	145	164	144	4	9,5
F 82_	80	PN 16	138	160	182	180	4	9,5

Connection elbow

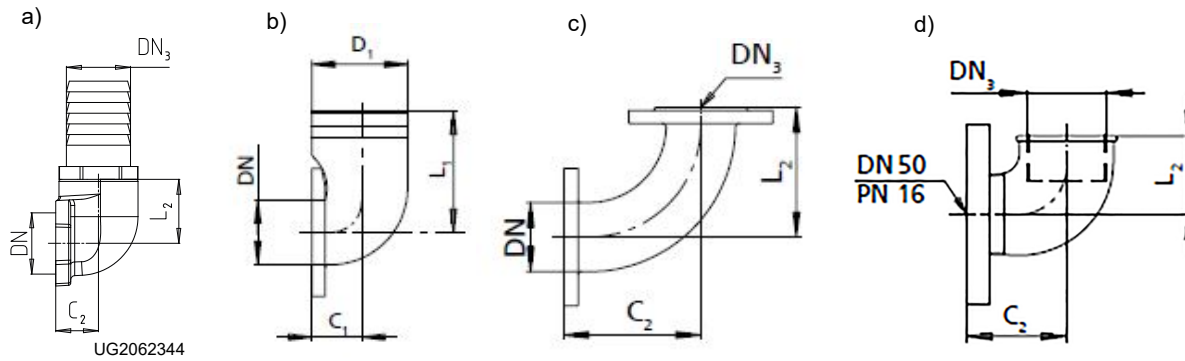


Fig. 10: Connection elbow dimensions

a)	Connection elbow with internal thread and external thread, together with threaded connection for hose piece (P6)	b)	Connection elbow with flange/hose connection (P13)
c)	Connection elbow with flanges (P14)	d)	Connection elbow with internal thread and external thread (P14) and threaded flange (P27)

Table 9: Dimensions of connection elbow [mm]

Size	DN	Connection elbow with internal thread and external thread, together with threaded connection for hose piece (P6)			Connection elbow with flange/hose connection (P13)			Connection elbow with flanges (P14)			Connection elbow with internal thread and external thread (P14) and threaded flange (P27)		
		DN ₃	C ₂	L ₂	D ₁	C ₁	L ₁	DN ₃	C ₂	L ₂	DN ₃	C ₂	L ₂
F 50_	50	G 2" ⁵⁾	43	60	-	-	-	-	-	-	-	-	-
F 51_/52_	50	-	-	-	-	-	-	-	-	-	G 2"	78	58
F 60_	65	G 2 1/2" ⁶⁾	51	100	-	-	-	-	-	-	-	-	-
F 61_/62_	65	-	-	-	75	40	135	65	135	135	-	-	-
F 82_	80	-	-	-	75	115	175	80	135	135	-	-	-

5 Inside diameter of hose = 63 mm

6 Inside diameter of hose = 80 mm

Duckfoot bend

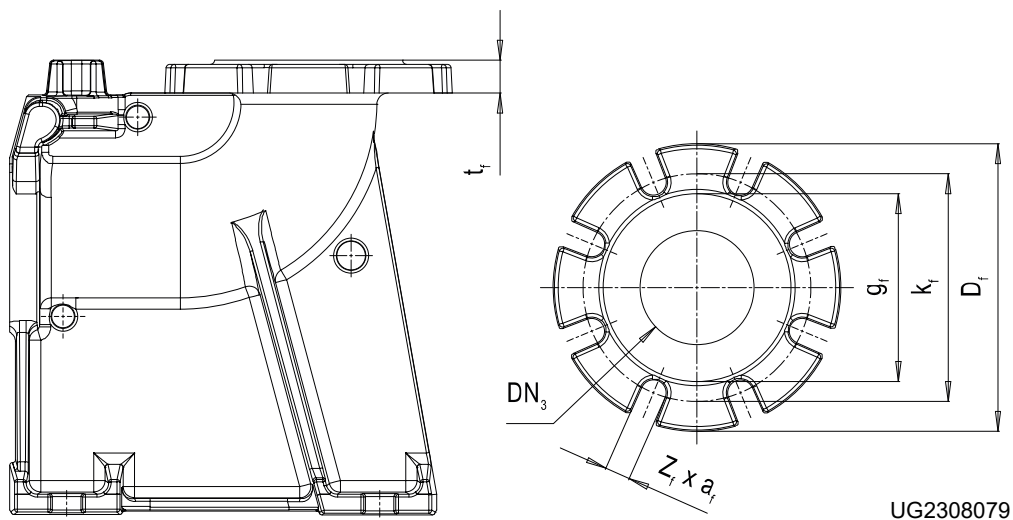


Fig. 11: Duckfoot bend dimensions

Table 10: Duckfoot bend dimensions [mm]

Flange design	DN ₃	g _f	k _f	t _f	D _f	Z _f	a _f
DN 50 (DN ₃ = DIN ISO)	50	102	125	20	160	4	20
DN 50 (DN ₃ = ASME)	50	102	120,5	20	160	4	20
DN 65 (DN ₃ = DIN ISO/ASME)	65	122	140	22	180	4	21
DN 65/DN 80 (DN ₃ = DIN ISO)	80	133	160	27	200	8	18
DN 80 (DN ₃ = DIN ISO)	80	132	160	23	200	8	18
DN 80/DN 100 (DN ₃ = DIN ISO/ASME)	100	156	180	23	220	8	18

AmaPorter, stationary installation, straight claw (horizontal), guide wire, guide hoop and single guide rail arrangement

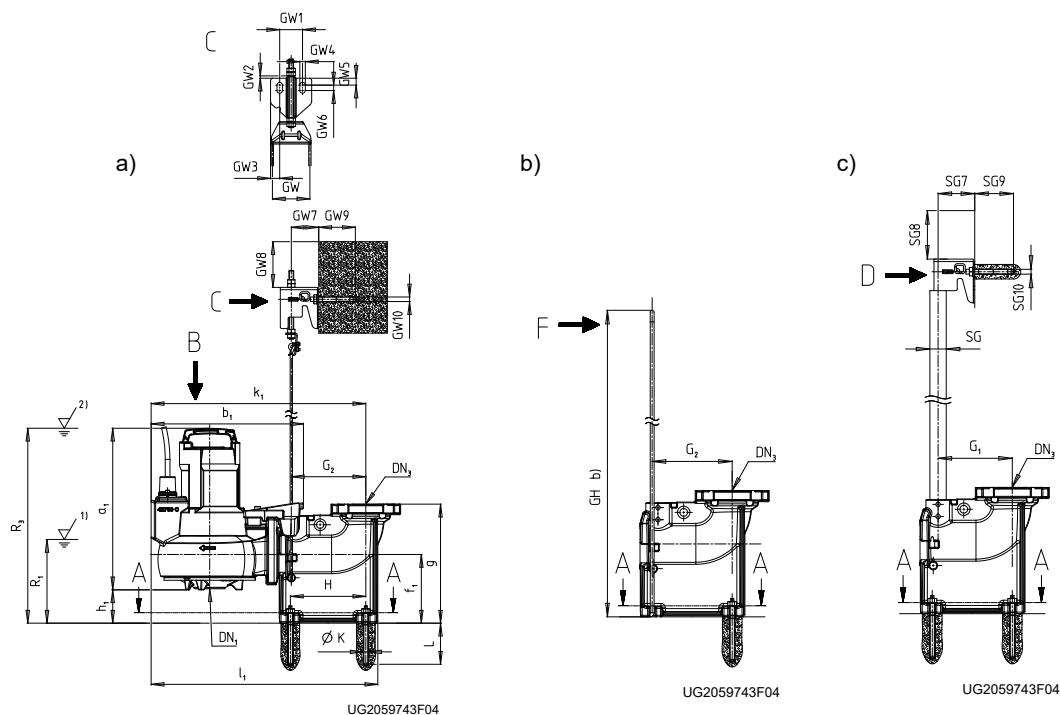


Fig. 12: Dimensions of stationary model, straight claw (horizontal)⁷⁾


a)	Guide wire arrangement	b)	Guide hoop arrangement
c)	Single guide rail arrangement		

R1	Lowest stop level for automatic operation
R3	Minimum submergence for continuous operation

Table 11: Pump set dimensions [mm]

Size	DN ₁	a ₁	b ₁	f ₁	h ₁	k ₁	l ₁	R ₁	R ₃
F 50_	44	341	301	105	32	400	429	138	373
F 51_	42	466	377	105	35	472	502	161	501
F 52_	42	527	391	105	31	488	514	153	558
F 60_	59	354	334	150	73	470	496	183	427
F 61_	65	578	423	150	61	558	583	234	639
F 62_	65	518	409	150	63	544	569	241	581
F 82_	80	582	476	200	103	603	693	262	685

⁷ Straight claw (vertical) for DN 80

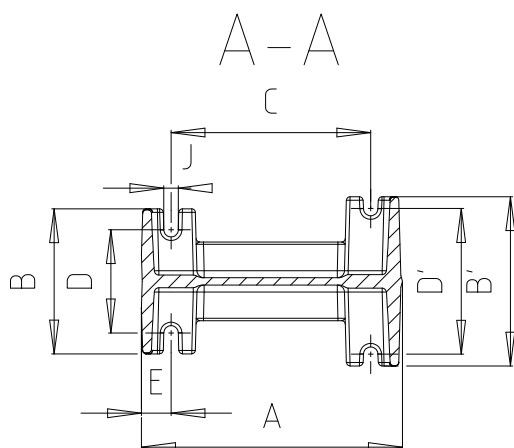


UG2059743F04

Fig. 13: Duckfoot bend dimensions

Table 12: Duckfoot bend dimensions [mm]

Size	DN ₃	A	B	B'	C	D	D'	E	g	G ₁	G ₂ ⁸⁾⁹⁾	GH ⁹⁾	GH1 ⁹⁾	H	J	ØK	L
F 50_	50	179	110	120	125	80	100	25	201	113	125	3 sizes available: 1216/1516/1816	80	125	12	12	90
F 51_	50	179	110	120	125	80	100	25	201	113	125		80	125	12		90
F 52_	50	179	110	120	125	80	100	25	201	113	125		80	125	12		90
F 60_	65	216	120	140	165	85	120	25	260	153	163		80	165	12		90
F 61_	65	216	120	140	165	85	120	25	260	153	163		80	165	12		90
F 62_	65	216	120	140	165	85	120	25	260	153	163		80	165	12		90
F 82_	80	300	200	200	220	150	150	40	320	163	173 ⁷⁾	-	-	170	20	18	125

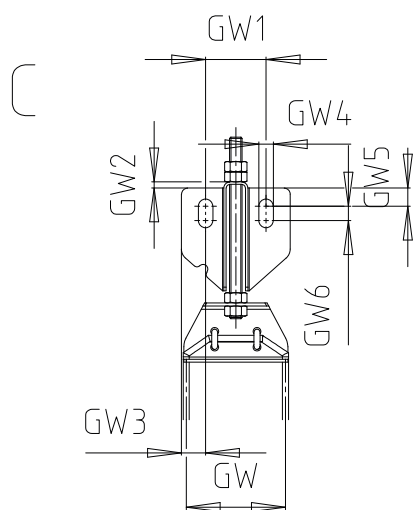

UG2059743F04


Fig. 14: Dimensions of guide wire arrangement

Table 13: Dimensions of guide wire arrangement [mm]

Size	GW	GW1	GW2	GW3	GW4	GW5	GW6	GW7	GW8	GW9	GW10
F 5_ / 6_	79	50	5	20	12	15	12	60	100	80	Ø10
F 8_	165										

⁸ For guide wire arrangement only

⁹ For guide hoop arrangement only

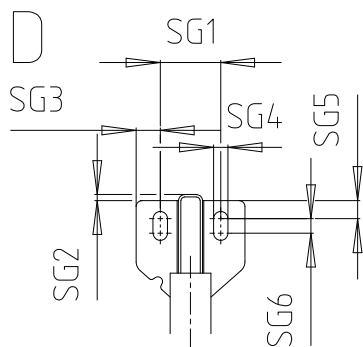


UG2059743F04

Fig. 15: Dimensions of single guide rail arrangement

Table 14: Dimensions of single guide rail arrangement [mm]

Size	SG	SG1	SG2	SG3	SG4	SG5	SG6	SG7	SG8	SG9	SG10
F 5_ / 6_	Ø33,7×3,2	50	5	20	12	15	12	76	100	80	Ø10
F 8_	Ø60,3×3,6							60			

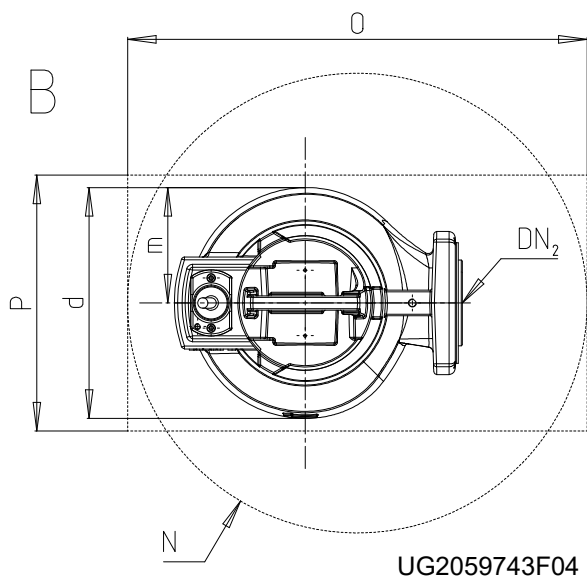


UG2059743F04

Fig. 16: Pump set dimensions

Table 15: Pump set dimensions [mm]

Size	DN ₂	d	m	N min.	O min.	P min.
F 50_	50	196	98		400	270
F 51_	50	250	125		465	350
F 52_	50	254	129		465	350
F 60_	65	226	113		450	350
F 61_	65	251	127		500	400
F 62_	65	265	142		500	400
F 82_	80	322	176		550	400

AmaPorter F 6_ / 8_, stationary installation, straight claw (vertical), twin guide rail arrangement

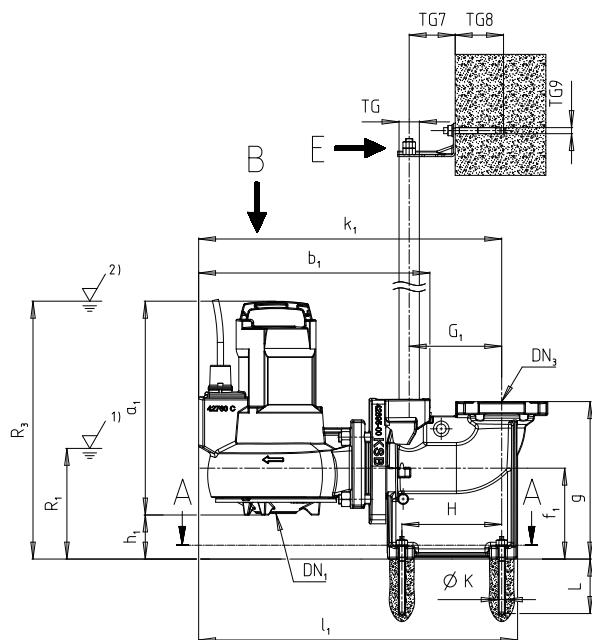

UG2059743F03

Fig. 17: Dimensions of stationary model, straight claw (vertical), twin guide rail arrangement

R1	Lowest stop level for automatic operation
R3	Minimum submergence for continuous operation

Table 16: Pump set dimensions [mm]

Size	DN ₁	a ₁	b ₁	f ₁	h ₁	k ₁	l ₁	R ₁	R ₃
F 60_	59	354	385	150	73	501	528	183	427
F 61_	65	578	468	150	61	588	613	234	639
F 62_	65	518	454	150	63	574	599	241	581
F 82_	80	582	506	200	103	630	720	262	685




Fig. 18: Duckfoot bend dimensions, twin guide rail arrangement

Table 17: Duckfoot bend dimensions, twin guide rail arrangement [mm]

Size	DN ₃	A	B	B'	C	D	D'	E	G	G ₁	H	J	ØK	L
F 60_	65	216	120	140	165	85	120	25	260	153	165	12	12	90
F 61_														
F 62_														
F 82_	80	300	200	200	220	150	150	40	320	170	170	20	18	125




Fig. 19: Mounting bracket dimensions, twin guide rail arrangement

Table 18: Mounting bracket dimensions, twin guide rail arrangement [mm]

Size	TG	TG1	TG2	TG3	TG4	TG5	TG6	TG7	TG8	TG9
F 6_	Ø33,7 × 3,2	70	55	50	12	12	50	76	80	Ø10
F 8_	Ø60,3 × 3,6						82	86		

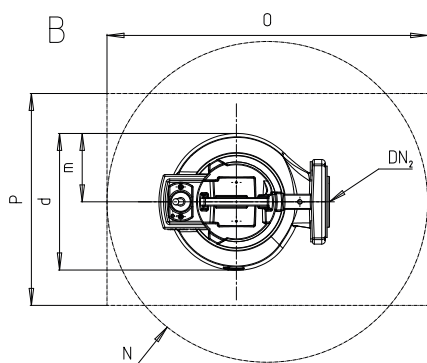


Fig. 20: Pump set dimensions, twin guide rail arrangement

Table 19: Pump set dimensions [mm]

Size	DN ₂	d	m	N min.	O min.	P min.
F 60_	65	226	113		530	350
F 61_		251	127		550	400
F 62_		265	142			
F 82_	80	322	176		580	

AmaPorter F 50, stationary wet installation, straight pump foot G 2", guide wire/guide hoop arrangement

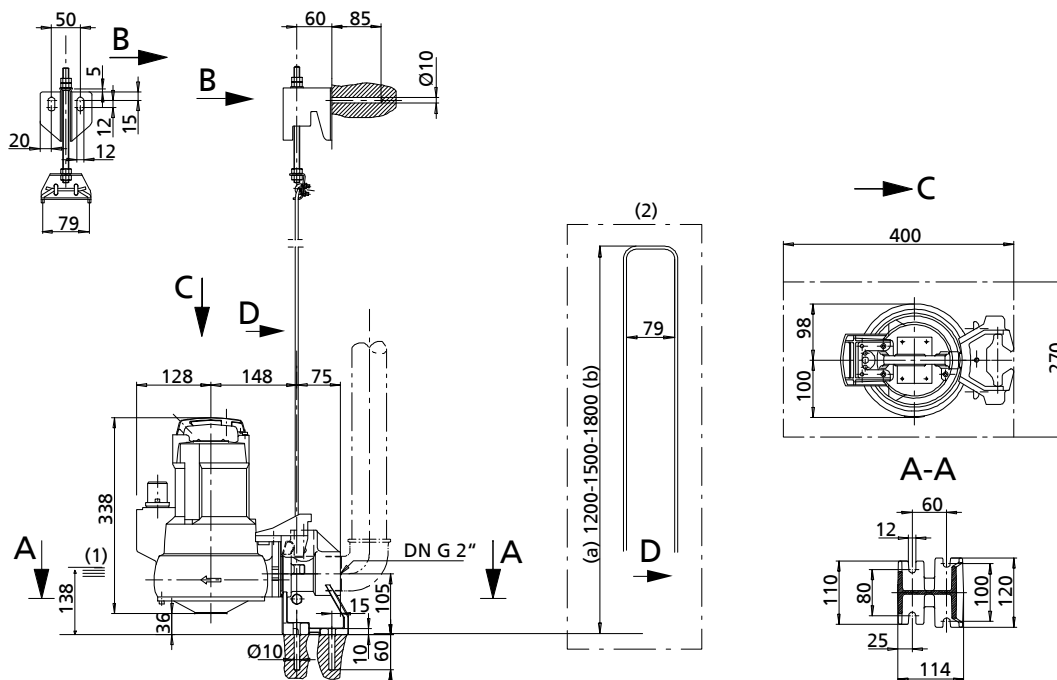


Fig. 21: Dimensions of stationary wet-installed model, straight pump foot G 2", guide wire/guide hoop arrangement

(1)	Lowest switch-off point	(a)	Minimum
(2)	Guide hoop	(b)	Maximum

AmaPorter F 60, stationary wet installation, straight pump foot G 2 ½", guide wire/guide hoop arrangement

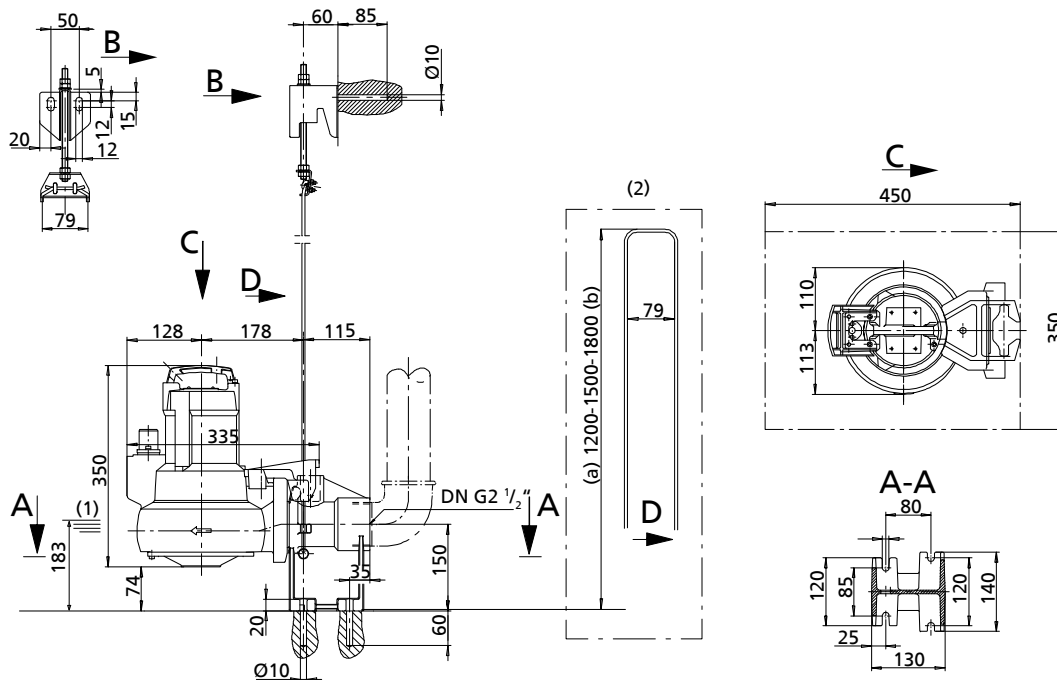


Fig. 22: Dimensions of stationary wet-installed model, straight pump foot G 2 ½", guide wire/guide hoop arrangement

(1)	Lowest switch-off point	(a)	Minimum
(2)	Guide hoop	(b)	Maximum

AmaPorter F 50_, stationary wet installation, straight pump foot G 2", single guide rail arrangement

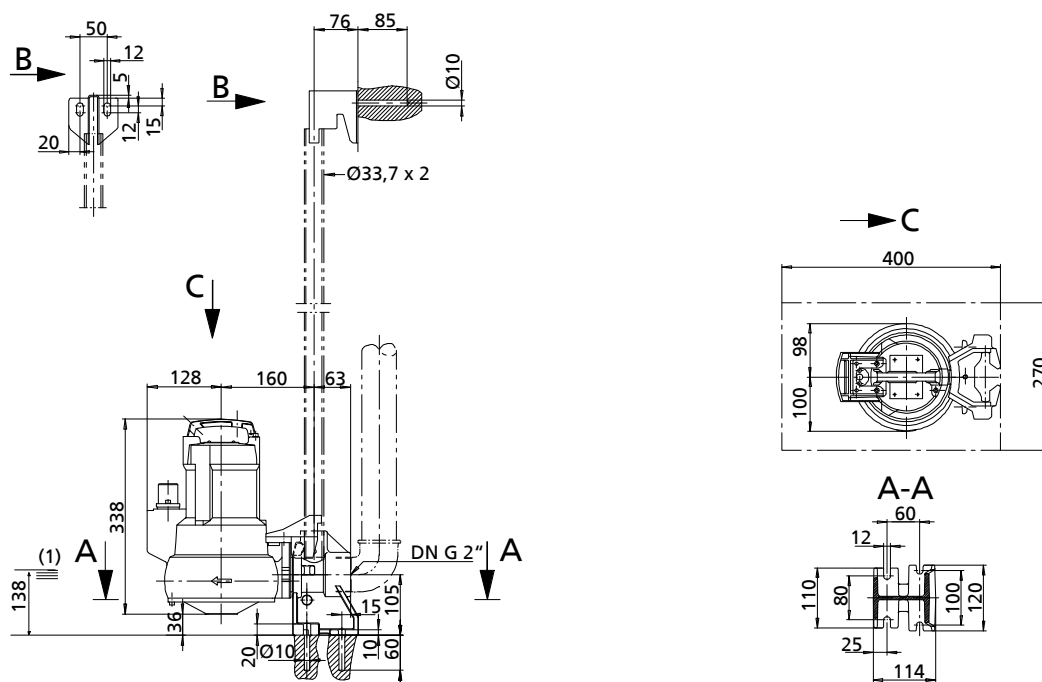


Fig. 23: Dimensions of stationary wet-installed model, straight pump foot G 2", single guide rail arrangement

(1)	Lowest switch-off point
-----	-------------------------

AmaPorter F 60_, stationary wet installation, straight pump foot G 2 ½", single guide rail arrangement


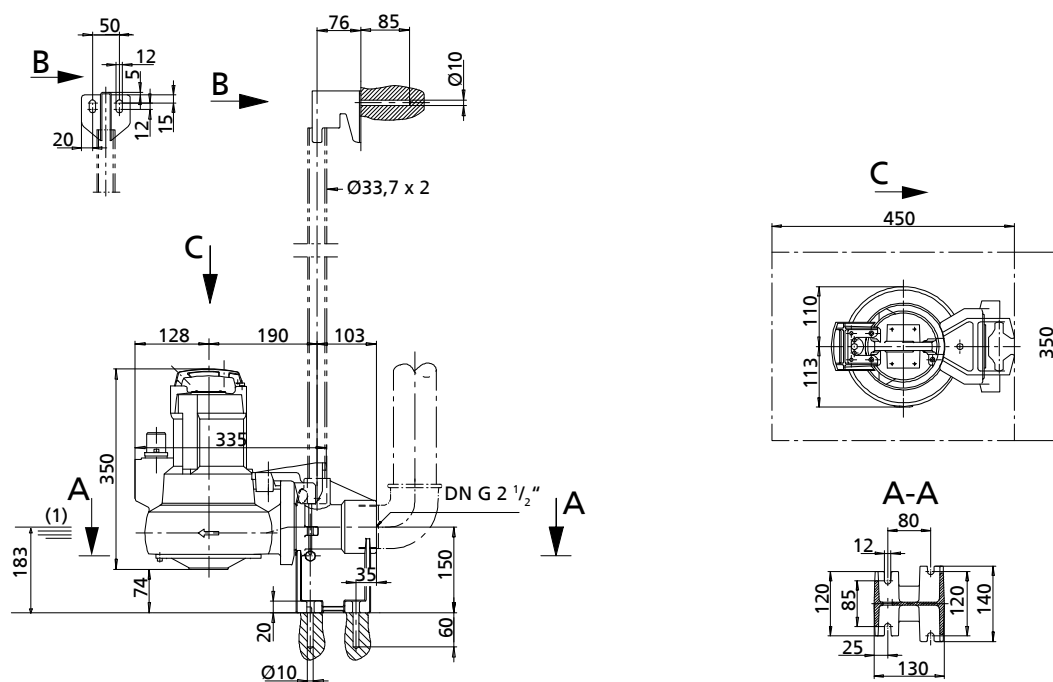


Fig. 24: Dimensions of stationary wet-installed model, straight pump foot G 2 ½", single guide rail arrangement

(1)	Lowest switch-off point
-----	-------------------------

AmaPorter F 5__, stationary installation, inclined claw, twin guide rail arrangement

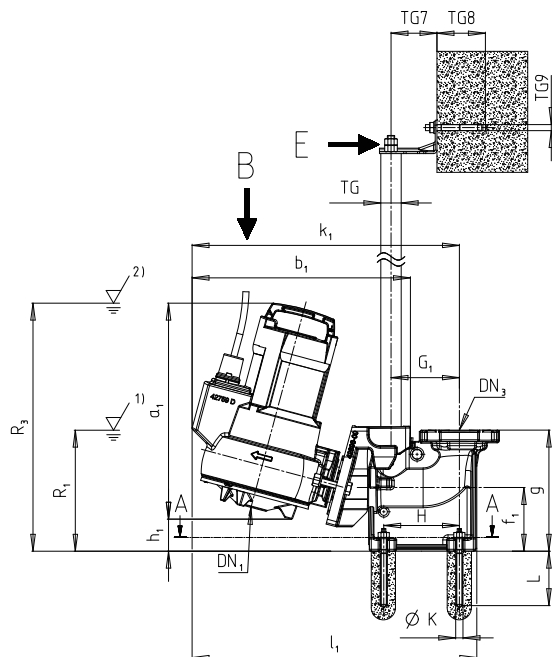


UG2059414F02

Fig. 25: Dimensions of stationary model, inclined claw, twin guide rail arrangement

R1	Lowest stop level for automatic operation
R3	Minimum submergence for continuous operation

Table 20: Pump set dimensions [mm]

Size	DN ₁	a ₁	b ₁	f ₁	h ₁	k ₁	l ₁	R ₁	R ₃
F 50_	44	357	361	105	53	442	471	200	411
F 51_	42	494	422		54	499	528	220	550
F 52_	42	549	426		53	506	535	230	606




UG2059414F02

Fig. 26: Duckfoot bend dimensions, inclined claw, twin guide rail arrangement

Table 21: Duckfoot bend dimensions, twin guide rail arrangement, inclined claw [mm]

Size	DN ₃	A	B	B'	C, H	D	D'	E	g	G ₁	J	ØK	L
F 50_	50	179	110	120	125	80	100	25	201	113	12	12	90
F 51_													
F 52_													




UG2059414F02

Fig. 27: Mounting bracket dimensions, inclined claw, twin guide rail arrangement

Table 22: Mounting bracket dimensions, twin guide rail arrangement, inclined claw [mm]

Size	TG	TG1	TG2	TG3	TG4	TG5	TG6	TG7	TG8	TG9
F 5_	Ø33,7 × 3,2	70	55	50		12	50	76	80	Ø10

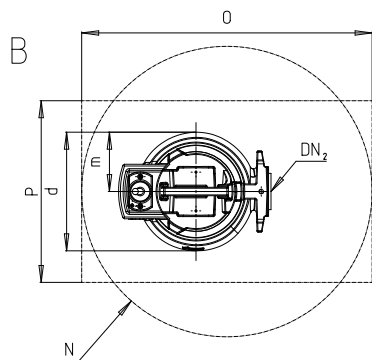

UG2059414F02

Fig. 28: Pump set dimensions, inclined claw, twin guide rail arrangement

Table 23: Pump set dimensions [mm]

Size	DN ₂	d	m	N min.	O min.	P min.
F 50_	50	196	98		480	300
F 51_		250	125			350
F 52_		254	129			350

Installation types

Table 24: Installation type S – stationary wet installation


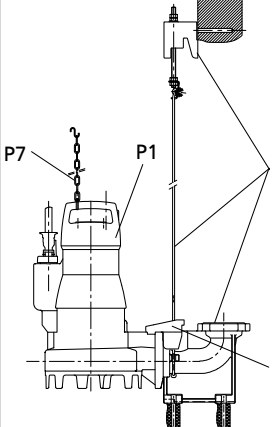
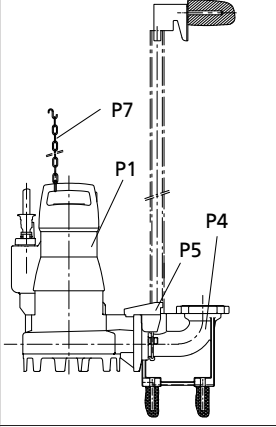
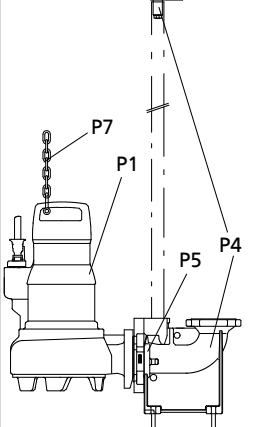
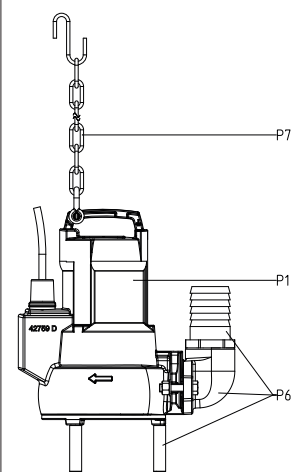
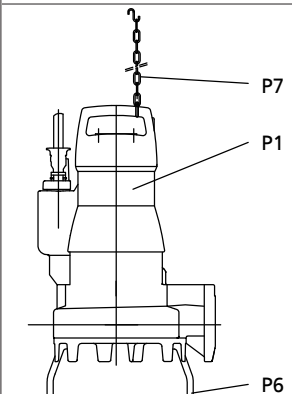
Installation type	Description
	Guide hoop arrangement (only for sizes 5_/6_) P1: pump P2: installation parts (duckfoot bend and fasteners), guide hoop arrangement, installation depth = 1.5 m / 1.8 m / 2.1 m P5: claw with sealing element and fasteners P7: lifting chain / lifting rope with shackle, length = 2 m
	Guide wire arrangement P1: pump P4: installation parts (duckfoot bend and fasteners, guide wire, mounting bracket), guide wire arrangement, standard installation depth = 4.5 m P5: claw with sealing element and fasteners P7: lifting chain / lifting rope with shackle, length = 5 m
	Single guide rail arrangement P1: pump P4: installation parts (duckfoot bend and fasteners, mounting bracket), single guide rail arrangement, standard installation depth = 6 m P5: claw with sealing element and fasteners P7: lifting chain / lifting rope with shackle, length = 5 m
	Twin guide rail arrangement P1: pump P4: installation parts (duckfoot bend and fasteners, mounting bracket), twin guide rail arrangement, standard installation depth = 6 m P5: claw and adapter with sealing element and fasteners P7: lifting chain / lifting rope with shackle, length = 5 m


Table 25: Installation type transportable wet-installed model

Installation type	Description
	Transportable wet-installed model P1: pump P6: 3 feet, connection elbow with fasteners, claw, adapter P7: lifting chain / lifting rope with shackle, length = 5 m
	P1: pump P6: 3 feet (foot plate with optional fasteners) P7: lifting chain / lifting rope with shackle, length = 5 m

Installation information

Suggested installation layouts for transportable pump sets


DN₂50



Suggested installation layout 1


Vertical hose connection with elbow (P14) and Storz rigid coupling (P17) (quick-action coupling)

Sizes 65, 80, 100




Suggested installation layout 2

Vertical hose connection with plastic hose (P18)




Suggested installation layout 3

Horizontal hose connection (quick-action coupling) with plastic hose (P18)

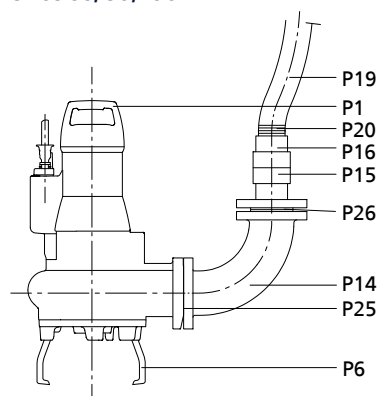


Suggested installation layout 1

Vertical hose connection (quick-action coupling) with plastic hose (P19) and hose clip (P20)



Suggested installation layout 2

Vertical hose connection with plastic hose (P19), hose clip (P20) and connection elbow (P13)

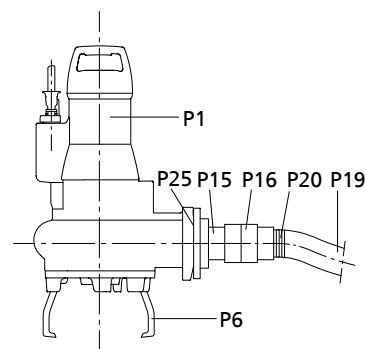


Suggested installation layout 3

Horizontal hose connection (quick-action coupling connection) with plastic hose (P19), hose clip (P20), Storz hose coupling (P16), Storz rigid coupling (P15)

P1 to P27 (⇒ Page 37)

Sump - AmaPorter F 50_ / 60_

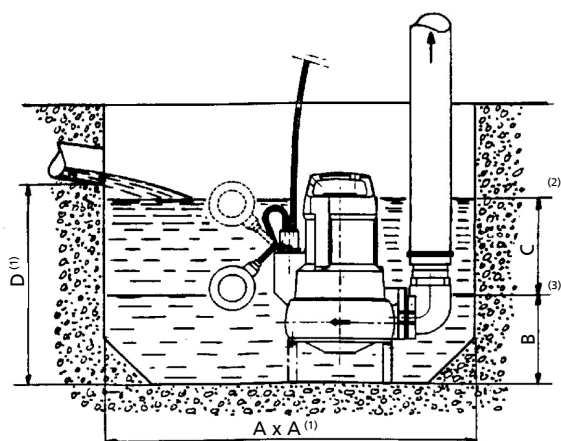


(1)	Minimum
(2)	Start
(3)	Stop

Size	A	B	C	D
	[mm ²]	[mm]		
F 50_	600 x 600	160	190	450
F 60_	600 x 600	170	190	480

Suggested installation layouts for stationary pump sets

Guide hoop arrangement


DN₂ 50/ DN₂ 65

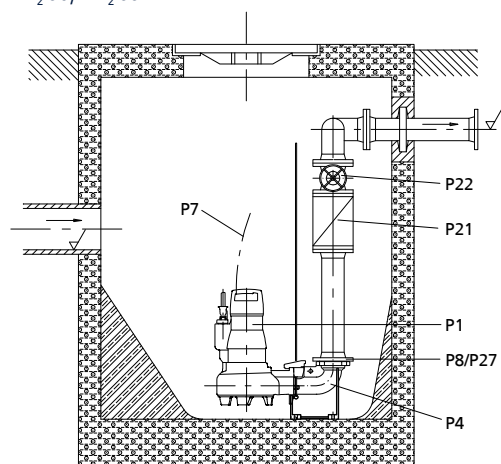

Suggested installation layout 1
Single-pump station
Duckfoot bend

Suspended installation


DN₂ 50/ DN₂ 65

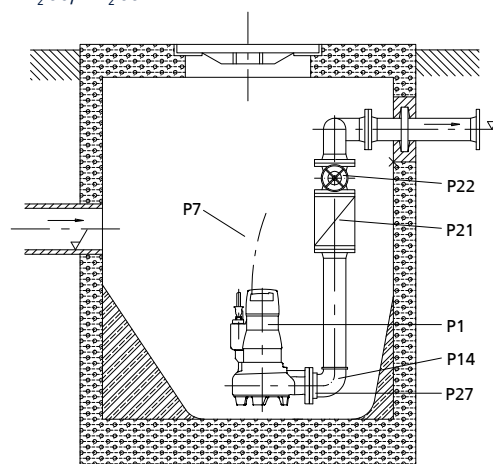


Suggested installation layout 2
Single-pump station for 1.5 m installation depth
Direct connection to discharge line (suspended installation)

Guide wire, single guide rail and twin guide rail arrangement

DN₂ 50/ DN₂ 65

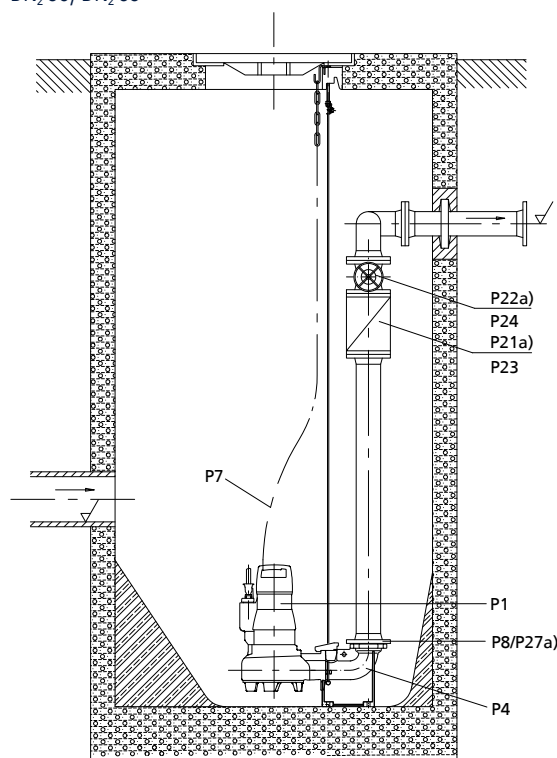

Suggested installation layout 3
Available with either guide wire, single guide rail or twin guide rail arrangement
Single-pump station for 4.5 m installation depth
Duckfoot bend

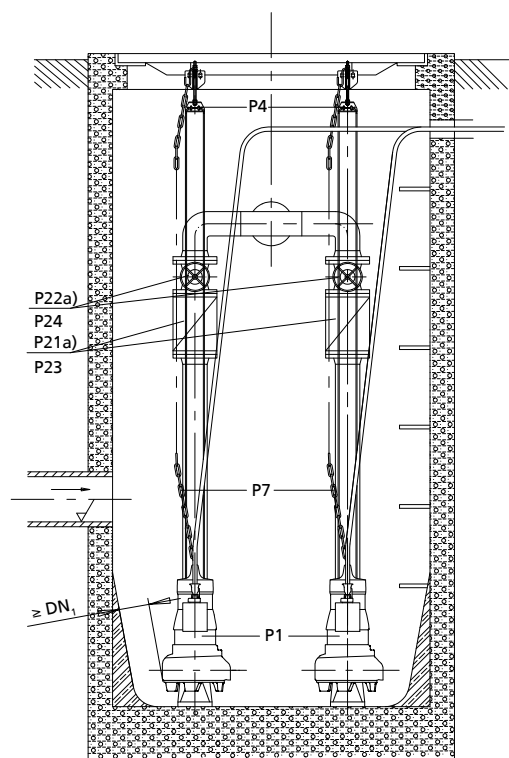



Suggested installation layout 4
Available with either guide wire, single guide rail or twin guide rail arrangement
Dual-pump station for 4.5 m installation depth
Duckfoot bend

a)	Only DN ₂ 50
----	-------------------------

Dimensions



Guide wire, single guide rail and twin guide rail arrangement

Suggested installation layout 3

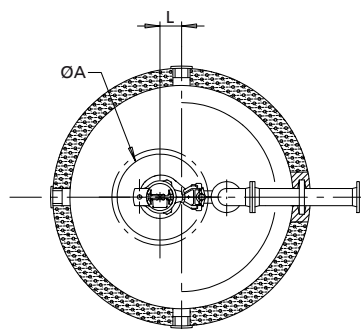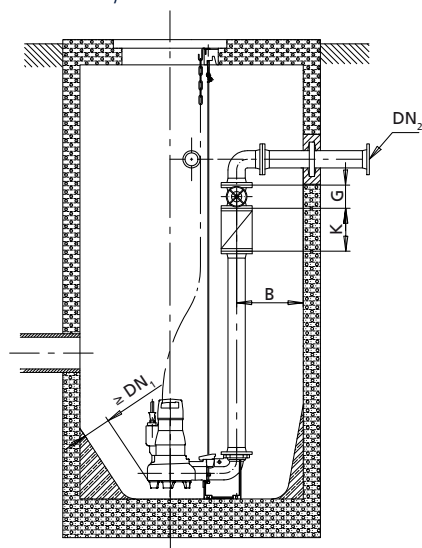

Single-pump station for 4.5 m installation depth
Duckfoot bend

Suggested installation layout 4

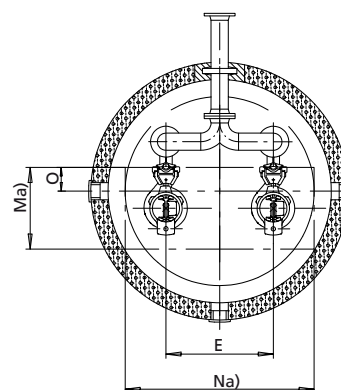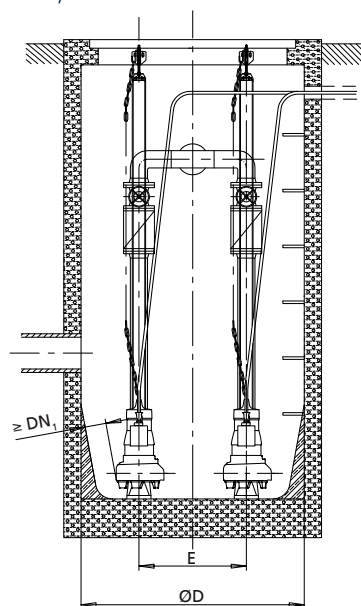

Dual-pump station for 4.5 m installation depth
Duckfoot bend

a) Minimum


Table 26: Dimensions [mm]

Size		Ø A	B	Ø D	E	G	K	L	M	N	O	DN ₁	DN ₂
F 51_	1 pump	625	165	1000	-	75	150	42	-	-	-	42	50
	2 pumps	-	235	1000	300	75	150	-	550	700	200	-	50
F 52_	1 pump	625	165	1000	-	75	150	42	-	-	-	42	50
	2 pumps	-	235	1000	300	75	150	-	550	700	200	-	50
F 61_ / 62_	1 pump	625	175	1000	-	180	260	92	-	-	-	65	65
	2 pumps	-	360	1200	600	180	260	-	550	1000	135	65	65
F 82_	1 pump	625	200	1000	-	180	260	25	-	-	-	80	80
	2 pumps	-	320	1200	600	180	260	-	600	1000	168	80	80


Suggested electrical installation layouts

Non-explosion-proof pump set

AmaPorter F

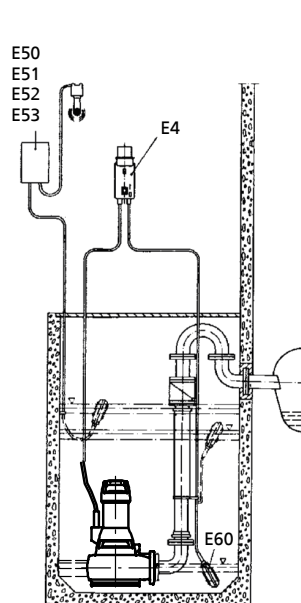

Suggested installation layout 1

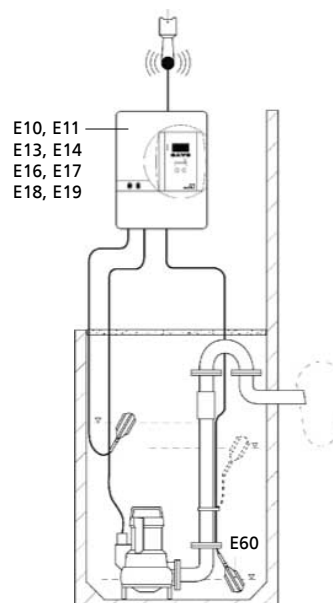

Suggested installation layout 2

Scope of supply

Depending on the model, the following items are included in the scope of supply:

Stationary wet-installed model (installation type S)

- Pump set complete with electric cables
- Claw with sealing elements and fasteners
- Lifting rope / lifting chain
- Mounting bracket with fasteners
- Duckfoot bend with fasteners
- Guiding equipment¹⁰⁾

Transportable wet-installed model (installation type P)


- Pump set complete with electric cables
- 3 feet
- Connection elbow incl. fasteners
- Connection piece
- Clamp
- Foot plate incl. fasteners
- Lifting rope / lifting chain

¹⁰ The guide rails are not included in the scope of supply.

Accessories

Installation parts for stationary and transportable pump sets

Table 27: Overview of installation parts for stationary pump sets

Item	Description	Connection	Installation depth [m]	Size					Mat. No.	[kg]
				F 50_	F 51_/52_	F 60_	F 61_/62_	F 82_		
Guide hoop arrangement										
	Installation parts for stationary wet installation (guide hoop arrangement) Comprising: duckfoot bend, stainless steel anchor bolts, guide hoop, straight claw (horizontal) with stainless steel screw/bolt	DN 50 (DN ₃ = DIN ISO / ASME)	1,5	✗	-	-	-	-	39020769	11
				-	✗	-	-	-	39022210	9
		DN 50 (DN ₃ = DIN ISO / ASME)	1,8	✗	-	-	-	-	39020770	12
				-	✗	-	-	-	39022211	10
		DN 50 (DN ₃ = DIN ISO / ASME)	2,1	✗	-	-	-	-	39020771	13
				-	✗	-	-	-	39022212	11
		DN 65 (DN ₃ = DIN ISO / ASME)	1,5	-	-	✗	✗	-	39020827	14.5
	Installation parts for stationary wet installation (guide hoop arrangement) Comprising: straight pump foot, guide hoop, stainless steel anchor bolts, straight claw (horizontal) with stainless steel screw/bolt	DN 50 / G 2"	1,5	✗	-	-	-	-	39020795	7.8
		DN 50 / G 2"	1,8	✗	-	-	-	-	39020796	8.8
		DN 50 / G 2"	2,1	✗	-	-	-	-	39020797	10.8
		DN 65 / G 2 1/2"	1,5	-	-	✗	-	-	39020813	11.2
		DN 65 / G 2 1/2"	1,8	-	-	✗	-	-	39020814	10.6
		DN 65 / G 2 1/2"	2,1	-	-	✗	-	-	39020815	12.1
Guide wire arrangement										
	Installation parts for stationary wet installation (guide wire arrangement) Comprising: duckfoot bend, stainless steel anchor bolts, suspension bracket, mounting bracket, 10 m guide wire, straight claw (horizontal) with stainless steel screw/bolt	DN 50 (DN ₃ = DIN ISO / ASME)	4,5	✗	-	-	-	-	39021023	10.6
				-	✗	-	-	-	39022196	10.5
		DN 65 (DN ₃ = DIN ISO / ASME)	4,5	-	-	✗	✗	-	39021025	14.4
		DN 65 / DN 80 (DN ₃ = 80 DIN ISO)	4,5	-	-	✗	✗	-	39020834	19.1
		DN 80 (DN ₃ = DIN ISO)	4,5	-	-	-	-	✗	39020988	27.3
		DN 80 / DN 100 (DN ₃ = 100 DIN ISO / ASME)	4,5	-	-	-	-	✗	39021002	31.5
	Installation parts for stationary wet installation (guide wire arrangement) Comprising: straight pump foot, stainless steel anchor bolts, suspension bracket, mounting bracket, 10 m guide wire, straight claw (horizontal) with stainless steel screw/bolt	DN 50 / G 2"	4,5	✗	-	-	-	-	39020779	11.5
		DN 65 / G 2 1/2"	4,5	-	-	✗	-	-	39020806	14.7
Single guide rail arrangement										
	Installation parts for stationary wet installation (single guide rail arrangement) Comprising: duckfoot bend, stainless steel anchor bolts, mounting bracket, straight claw (horizontal) with stainless steel screw/bolt (guide rails not included in the scope of supply)	DN 50 (DN ₃ = DIN ISO / ASME)	6,0	✗	-	-	-	-	39021212	14
				-	✗	-	-	-	39022204	12.5
		DN 65 (DN ₃ = DIN ISO / ASME)	6,0	-	-	✗	✗	-	39021213	17.2
		DN 65 / DN 80 (DN ₃ = 80 DIN ISO)	6,0	-	-	✗	✗	-	39021194	18.7
		DN 80 (DN ₃ = DIN ISO)	6,0	-	-	-	-	✗	39021200	26
		DN 80 / DN 100 (DN ₃ = 100 DIN ISO / ASME)	6,0	-	-	-	-	✗	39021206	23.8

Item	Description	Connection	Installation depth	Size					Mat. No.	[kg]
				[m]	F 50_	F 51_/52_	F 60_	F 61_/62_		
	Installation parts for stationary wet installation (single guide rail arrangement) Comprising: straight pump foot, stainless steel anchor bolts, mounting bracket, 10 metre guide wire, adapter, straight claw (horizontal) with stainless steel screw/bolt (guide rails not included in the scope of supply)	DN 50 / G 2"	6,0	X	-	-	-	-	39021182	10.8
		DN 65 / G 2 1/2"	6,0	-	-	X	-	-	39021188	14
Twin guide rail arrangement										
	Installation parts for stationary wet installation (twin guide rail arrangement) Comprising: duckfoot bend, stainless steel anchor bolts, mounting bracket, adapter, inclined claw (DN 50) / straight claw (vertical) (DN 65, DN 80) with stainless steel screw/bolt (guide rails not included in KSB's scope of supply)	DN 50 (DN ₃ = DIN ISO / ASME)	6,0	X	X	-	-	-	39023002	15.2
		DN 65 (DN ₃ = DIN ISO / ASME)	6,0	-	-	X	X	-	39023006	18.7
		DN 65 / DN 80 (DN ₃ = 80 DIN ISO)	6,0	-	-	X	X	-	39023009	22.8
		DN 80 (DN ₃ = DIN ISO)	6,0	-	-	-	-	X	39023018	32.4
		DN 80 / DN 100 (DN ₃ = 100 DIN ISO / ASME)	6,0	-	-	-	-	X	39023024	34
Claw										
	Guide wire, single guide rail, guide hoop arrangement Straight claw (horizontal) EN-GJL-250 (exception: EN-GJS-400-15 for sizes F 51_ / F 52_) with stainless steel screw/bolt	DN 50	1,5/1,8/2,1	X	-	-	-	-	39021016	1.1
				-	X	-	-	-	39022248	1.2
		DN 65	4,5	-	-	X	X	-	39021018	2
		DN 80	6,0	-	-	-	-	X	39021020	3.5
	Twin guide rail arrangement Inclined claw (DN 50)/straight claw (vertical) (DN 65, DN 80) EN-GJL-250 with stainless steel screw/bolt	DN 50	6,0	X	X	-	-	-	39022990	6
		DN 65		-	-	X	X	-	39022993	7.3
		DN 80		-	-	-	-	X	39022996	9.7
Lifting bail										
	Lifting bail made of stainless steel 1.4306 with A4-70 bolts, for lowering the pump set at an angle	DN 50	14,5	-	X	-	-	-	39022395	0.6
	Lifting bail made of stainless steel 1.4306 With A4-70 screws/bolts, for lowering the pump set in a vertical position	DN 50	14,5	-	X	-	-	-	39023593	0.85
		DN 65 / DN 80		-	-	-	X	X	39023594	1.2

Item	Description	Connection	Installation depth	Size					Mat. No.	[kg]	
			[m]	F 50 _	F 51_/52_	F 60 _	F 61_/62_	F 82_			
Conversion parts											
	Parts for conversion to twin guide rail arrangement, consisting of: mounting bracket, stainless steel screws/bolts, adapter, anchor bolts	DN 50 / DN 65	6,0	X	X	X	X	-	39022984	1	
	 Note: required for conversion of guide hoop, guide wire or single guide rail arrangement to twin guide rail arrangement A claw for twin guide rail arrangements must be provided.	DN 80		-	-	-	-	X	39022987	2.8	

Table 28: Installation parts for transportable wet-installed model

Item	Description	Connection	Installation depth	Size					Mat. No.	[kg]
			[m]	F 50_	F 51_/52_	F 60_	F 61_/62_	F 82_		
P6 	Comprising: 3 feet, connection elbow with fasteners, adapter, claw	DN 50	14,5	X	-	-	-	-	39023046	2
P6 		DN 65		-	-	X	-	-	39023047	4.1
P6 	Comprising: 3 feet	DN 50 / DN 65 / DN 80		-	X	-	X	X	05017148	0.07
P6 	Comprising: footplate incl. bolts (only for un-even mounting surfaces and in combination with feet)	DN 50 / DN 65 / DN 80		-	X	-	X	X	39022262	0.9

Table 29: Lifting rope / lifting chain for stationary and transportable pump sets (all sizes)


Item	Description	Load	Length	Mat. No.	[kg]
		Max.			
		[kg]	[m]		
P7 	Chain (1.4404) short-linked, tested and duly labelled to Directive 2006/42/EC (Machinery Directive), hook (1.4301), shackle (1.4404)	200	2	39024056	1.2
		200	3	39024057	1.6
		200	5	39024058	2.4
		200	10	39024059	4.4
P7 	Lifting rope, 5 m, made of polypropylene, with shackle 1.4401 and hook 1.4571 ¹¹⁾	-	5	39021975	2.5

¹¹ Increase quantity for larger installation depths.

Pump accessories
Table 30: Overview of pump accessories¹²⁾

Item	Description	Connection	Length [m]	AmaPorter					Mat. No.	[kg]
				F50_	F51_ / 52_	F60_	F61_ / 62_	F82_		
	Flange for pipe coupling PN 10, at the flanged elbow, mating dimensions to PN 16	DN 50 / R 2	-	X	X	-	-	-	19551111	1.2
		DN 65 / R 2 1/2	-	-	-	X	X	-	39020184	1.2
	PVC adapter for hose connection, with 1 hose clip	(Plastic hose, inside diameter 63 mm/R2, see P19)	-	X	X	-	-	-	11191498	0.3
	Threaded flange PN 6, B50 DIN 2558 with screws/bolts for discharge nozzle	DN 50 / Rp 2	-	X	-	-	-	-	19200721	1
	Connection elbow with flange/hose connection made of EN-GJL-250, grey cast iron PN 16, DIN 2501, including joint ring and hose clip; for DN 100 also with fixing bolts For flange connection use item 25 / item 26 (not for DN 100).	DN 65/B 75	-	-	-	X	X	-	19135655	6
		DN 80/B 75	-	-	-	-	-	X	19131746	6.6
	Angle with internal thread / external thread, galvanised grey cast iron (flange connection see P27)	G 2	-	X	X	-	-	-	00241966	0.3
		G 2 1/2	-	-	-	X	-	-	00240316	1.4
	Connection elbow with flanges PN 16, DIN 2501 (for flange connection use item 25 or item 26), grey cast iron	DN 65/65	-	-	-	-	X	-	00265480	11
		DN 65/80	-	-	-	-	X	-	25198402	8
		DN 80/80	-	-	-	-	-	X	11150856	10
	Flange connection to DIN 2501, drilled to PN 16, aluminium / steel	DN 65 / B 75	-	-	-	X	X	-	18040148	3.5
	Storz rigid coupling	DN 80/B 75	-	-	-	-	-	X	18072642	3.5
	Storz hose coupling, aluminium alloy for plastic hose B 75 (P19) 2 hose clips (P20) are required for hose mounting.	C 52 (DIN 14321)	-	-	X	-	-	-	00524551	0.3
		B 75 (DIN 14322)	-	-	-	X	X	X	00520454	0.7
	Storz rigid coupling with external thread to DIN ISO 228/1	C 52 / G 2 A	-	X	X	-	-	-	00524370	0.2
		B 75 / G 2 1/2	-	-	-	X	X	-	00524371	0.4

2539.56/05-EN

Item	Description	Connection	Length [m]	AmaPorter					Mat. No.	[kg]
				F 50_-	F 51_- / 52_-	F 60_-	F 61_- / 62_-	F 82_-		
	Plastic hose DN 50, DIN 14811, with integrated C couplings	C 52	5	X	X	-	-	-	00522262	2.3
		C 52	10	X	X	-	-	-	00522263	4.2
		C 52	20	X	X	-	-	-	00522264	5.7
	Plastic hose without coupling, DIN 14811	63 ¹³⁾	5	X	X	-	-	-	39018688	1.7
			10	X	X	-	-	-	39018689	3.4
			20	X	X	-	-	-	39018690	6.8
		B 75	5	-	-	X	X	X	39019064	2
			10	-	-	X	X	X	39019065	4
			20	-	-	X	X	X	39019066	8
			30	-	-	X	X	X	39019071	12
		80 ¹³⁾	5	-	-	-	-	X	39018691	2.2
			10	-	-	-	-	X	39019062	4.3
	Hose clip DIN 3017, chrome steel	B 50	-	X	-	-	-	-	00460476	0.04
		B 50 ¹⁴⁾	-	-	X	-	-	-	39000515	0.03
		B 75	-	-	-	X	X	X	00109515	0.05
	RK swing check valve Plastic, EN 12050-4, with internal thread ISO 7/1, full bore and drain plug; cannot be used for pumped drainage	Rp 2	-	X	X	-	-	-	01009773	0.5
	Socket gate valve, CuZn, PN 10-12 DIN 3352	Rp 2	-	X	X	-	-	-	00411503	1.29
		Rp 2 1/2	-	-	-	X	X	-	39000507	1.7
	Check valve grey cast iron, full bore, lifting device, flanges drilled to DIN 2501, PN 16	DN 65	-	-	-	X	X	-	48829253	13.74
		DN 80	-	-	-	-	-	X	48829254	16.5
	COBRA-SGP with flat body, grey cast iron, PN 16, flanges drilled to ISO 7005/DIN 2501	DN 65	-	-	-	X	X	-	48229953	16.2
		DN 80	-	-	-	-	-	X	48229954	19.5
	Set of installation accessories for a flange connection, discharge nozzle (items 14 or 15) Consisting of: 4 hexagon head bolts with nuts and 1 sealing element	-	-	-	-	X	X	-	19551115	0.8
		-	-	-	-	-	-	X	39021944	0.8
		-	-	-	-	-	-	X	19551100	0.8

13 Inside diameter

14 For plastic hose Ø 63 item 19

Item	Description	Connection	Length [m]	AmaPorter					Mat. No.	[kg]
				F 50_	F 51_ / 52_	F 60_	F 61_ / 62_	F 82_		
P26 	Set of installation accessories for a flange connection Consisting of: 8 hexagon head bolts with nuts and 1 sealing element		-	-	-	-	-	X	19551114	0.8
P27 	Threaded flange PN 16 / R 2, threaded connection C50 DIN 2566 with screws/bolts, sealing element and nuts for duckfoot bend Consisting of: flange, 4 hexagon head bolts with nuts and washers and 1 sealing element	DN 50 / Rp 2	-	X	X	-	-	-	19551353	3.23
		DN 65 / Rp 2 1/2	-	-	-	X	X	-	39021943	2.9
P28 	Suction strainer	-	-	X	-	X	-	-	39023050	2
P28 	Hand pump, wall mounting, grey cast iron, suction-side connection Rp 1 1/2	-	-	-	X	-	X	X	00520485	12

Control units and switchgear

Not valid for France.

Table 31: Overview of control units and switchgear

Item	Description	Type	Voltage	I _N min.	I _N max.	AmaPorter												Mat. No.	[kg]
			[V]			[A]		F 500	F 501	F 502	F 503	F 51 ₋	F 52 ₋	F 601	F 602	F 603	F 61 ₋		
	MSE switchgear	60.1	230	-	-	✗	-	-	-	-	-	-	-	-	-	-	-	19070138	1
	Float switch	80.1	230	-	-	-	✗	-	-	-	-	✗	-	-	-	-	-	19070139	1
		100.1	230	-	-	-	-	✗	✗	-	-	-	✗	✗	-	-	-	19070140	1
	MSD motor protection switch	40.1	400	-	-	✗	✗	✗	-	-	-	✗	✗	-	-	-	-	19070116	1
	Float switch	60.1	400	-	-	-	-	-	✗	-	-	-	-	✗	-	-	-	19070117	1.55
	Multi-functional plug, type Hyper, with motor protection relay	Hyper 37.1	400	2,6	3,7	✗	✗	✗	-	✗	✗	✗	✗	-	✗	✗	✗	19071492	0.98
		Hyper 55.1	400	3,7	5,5	-	-	-	✗	✗	✗	-	-	✗	✗	✗	✗	19071493	0.98
		Hyper 80.1	400	5,5	8,0	-	-	-	-	✗	✗	-	-	-	✗	✗	✗	19071494	1
	CEE plug	Hyper 115.1	400	8,0	11,5	-	-	-	-	✗	✗	-	-	-	✗	✗	✗	19071495	0.98
LevelControl Basic 2 control unit for single-pump station, IP54																			
E10, 	For float switch or 4 - 20 mA sensor, optionally with master switch, 400 x 281 x 135 mm	BC1 230 ^{DFNO} 100	230	-	-	✗	✗	✗	✗	-	-	✗	✗	✗	-	-	-	19073760	4.5
E11 	For float switch or 4 - 20 mA sensor, optionally with master switch, 400 x 281 x 135 mm	BC1 400 ^{DFNO} 040	400	2,5	4,0	✗	✗	✗	-	✗	✗	✗	✗	-	-	-	-	19073763	4.67
		BC1 400 ^{DFNO} 063	400	4,0	6,3	-	-	-	✗	✗	✗	-	-	✗	✗	✗	✗	19073764	4.5
		BC1 400 ^{DFNO} 100	400	6,3	10,0	-	-	-	-	✗	✗	-	-	-	✗	✗	✗	19073765	4.5
LevelControl Basic 2 control unit for dual-pump station, IP54																			
E30 	For float switch or 4 - 20 mA sensor, optionally with master switch, 400 x 281 x 135 mm	BC2 230 ^{DFNO} 100	230	-	-	✗	✗	✗	✗	-	-	✗	✗	✗	-	-	-	19073774	4.7
E31 	For float switch or 4 - 20 mA sensor, optionally with master switch, 400 x 281 x 135 mm	BC2 400 ^{DFNO} 040	400	2,5	4,0	✗	✗	✗	-	✗	✗	✗	✗	-	✗	✗	✗	19073777	4.7
		BC2 400 ^{DFNO} 063	400	4,0	6,3	-	-	-	✗	✗	✗	-	-	✗	✗	✗	✗	19073778	4.7
		BC2 400 ^{DFNO} 100	400	6,3	10,0	-	-	-	-	✗	✗	-	-	-	✗	✗	✗	19073779	4.7

Alarm switchgears for pumps, non-ATEX-compliant

Table 32: AS0 / AS1 / AS2 / AS4 / AS5

Item	Description	Mat. No.	[kg]
E50	 Alarm switchgear AS0 With circuit breaker, acoustic signalling device with 85 dB(A), green equipment-on lamp Plastic housing, IP20, H x W x D = 140 x 80 x 57 [mm]. Use float switch, F1 leakage sensor (item E64), M1 alarm contactor or signal relay of control unit as contactor.	29128401	0.5
E51	 Alarm switchgear AS2 With circuit breaker, acoustic signalling device with 85 dB(A), green equipment-on lamp, volt-free contact for hook-up to a control station Plastic housing, IP20, H x W x D = 140 x 80 x 57 [mm]. Use float switch, F1 leakage sensor (item E64) or signal relay of control unit as contactor.	29128422	0.5
E52	 Alarm switchgear AS4 With circuit breaker, acoustic signalling device with 85 dB(A), green equipment-on lamp, volt-free contact for hook-up to a control station, self-charging power supply unit for 5 hours of operation in the event of a power failure Plastic housing, IP20, H x W x D = 140 x 80 x 57 [mm]. Use float switch (E60), F1 leakage sensor (item E64) or signal relay of control unit as contactor.	29128442	0.5
E53	 Alarm switchgear AS5 Mains-independent, with self-charging power supply unit for 10 hours of operation in the event of a power failure, mains pilot LED, fault indicator light, acknowledgement button, volt-free contact for hook-up to a control station, ready for connection with 1.8 m power cable and plug. ISO housing, IP41, H x W x D = 165 x 190 x 75 [mm]. Use float switch (E60) or signal relay of control unit as contactor.	00530561	1.7
E55	 Alarm switchgear AS1 In IP30 ISO plug housing, mains-independent, with self-charging power supply unit for 5 hours of operation in the event of a power failure, acoustic signalling device 70 dB(A) with circuit breaker and integrated signal transmitter with 3-metre power cable, max. 60 °C, not suitable for steam and condensate. 1. High water alert by suspending the sensor in a (pump) sump above the pump start-up point. 2. Water alert signal at a water level of only 1 mm by placing the sensor on the floor in areas with a flooding or leakage risk, e.g. the cellar or next to the washing machine in the kitchen or bathroom.	00533740	0.9

Control unit/switchgear accessories

Table 33: Control unit / switchgear accessories

Item	Description	Length of electric cable / flexible tube	AmaPorter							Mat. No.	[kg]
		[m]	F 500	F 501	F 502	F 503	F 601	F 602	F 603		
E60	 Float switch with free cable end Function: circuit closed in upper float position (NO contact) Float switch housing: polypropylene Fluid temperature: ≤ 70 °C Power cable: H07RN-F3G1	3	X	X	X	X	X	X	X	11037742	0.5
		5	X	X	X	X	X	X	X	11037743	0.74
		10	X	X	X	X	X	X	X	11037744	1.28
		15	X	X	X	X	X	X	X	11037745	1.84
		20	X	X	X	X	X	X	X	11037746	2.25
		25	X	X	X	X	X	X	X	11037747	2.9
		30	X	X	X	X	X	X	X	11037748	3.4
E62	 Float switch with free cable end Function: circuit open in upper float position (NC contact) Float switch housing: polypropylene Fluid temperature: 70 °C max. Power cable: H07RN-F3G1	5	X	X	X	X	X	X	X	11037756	0.8
		10	X	X	X	X	X	X	X	11037757	1.4
		20	X	X	X	X	X	X	X	11037758	2.6
E64	 F1 leakage sensor Contactor for alarm switchgears AS 0, AS 2, AS 4 or as alarm transmitter for LevelControl Basic 2 Alarm transmission options: High water alert by suspending the sensor in a (pump) sump above the pump start-up point. Warning at a water level of 1 mm in areas with a flooding or leakage risk (e.g. in the basement or next to the washing machine in the kitchen or bathroom) Dimensions [mm]: 52 x 21 x 20 (H x W x D)	3 m	X	X	X	X	X	X	X	19072366	0.2

Item	Description	Length of electric cable / flexible tube	AmaPorter							Mat. No.	[kg]
		[m]	F 500	F 501	F 502	F 503	F 601	F 602	F 603		
E70 	Horn, 12 V DC, 105 dB, 150 mA, IP54		X	X	X	X	X	X	X	01086547	0.09
E71 	Alarm combination (yellow lamp and piezo buzzer 92 dB), 12 V DC, 120 mA, IP65		X	X	X	X	X	X	X	01139930	0.1
E72 	Yellow alarm strobe light, 12 V DC, 195 mA, IP65		X	X	X	X	X	X	X	01056355	0.14
E73 	KSB ServiceTool		X	X	X	X	X	X	X	47121210	0.2
E90 	Rechargeable battery retrofit kit for LevelControl Basic 2, type BC Scope of supply: 2 rechargeable batteries (6 V, 1.3 Ah) and charge controller		X	X	X	X	X	X	X	19074194	0.8
E91 	Rechargeable battery retrofit kit for LevelControl Basic 2, type BC Scope of supply: 1 rechargeable battery (12 V, 1.2 Ah) and charge controller		X	X	X	X	X	X	X	19074199	1



KSB S.A.S.

128, rue Carnot • 59320 Sequedin (France)

Tél. +33 9 69 39 29 79

www.ksb.com

2025-08-21

2539.56/05-EN