

Submersible Mixer

Amamix

60 Hz

Type Series Booklet



Legal information/Copyright

Type Series Booklet Amamix

All rights reserved. The contents provided herein must neither be distributed, copied, reproduced, edited or processed for any other purpose, nor otherwise transmitted, published or made available to a third party without the manufacturer's express written consent.

Subject to technical modification without prior notice.

© KSB Aktiengesellschaft, Frankenthal 23.06.2014

Contents

Waste Water	4
Submersible Mixer	4
Amamix	4
Main applications	4
Fluids handled	4
Operating data	4
Designation	4
Design details	4
Materials	5
Product benefits	5
Design and selection information	5
Minimum level of fluid handled	5
Overview of product features / selection tables	6
Overview of product features	6
Submersible mixer / motor combinations	7
Dimensions	8
Amamix 200, 60 Hz, n = 1750 rpm, motor housing material gray cast iron - version without jet ring	8
Amamix 200, 60 Hz, n = 1750 rpm, motor housing material stainless steel - version without jet ring	10
Amamix 300, 60 Hz, n = 1160 rpm, motor housing material gray cast iron - version without jet ring	12
Amamix 300, 60 Hz, n = 1160 rpm, motor housing material stainless steel - version without jet ring	14
Amamix 400, 60 Hz, n = 875 rpm, motor housing material gray cast iron - version without jet ring	16
Amamix 400, 60 Hz, n = 875 rpm, motor housing material stainless steel - version without jet ring	18
Amamix 600, 60 Hz, n = 585 rpm, motor housing material gray cast iron - version without jet ring	20
Amamix 600, 60 Hz, n = 585 rpm, motor housing material stainless steel - version without jet ring	23
Amamix 300, 60 Hz, n = 1160 rpm, motor housing material gray cast iron - version with jet ring	26
Amamix 300, 60 Hz, n = 1160 rpm, motor housing material stainless steel - version with jet ring	28
Amamix 400, 60 Hz, n = 875 rpm, motor housing material gray cast iron - version with jet ring	30
Amamix 400, 60 Hz, n = 875 rpm, motor housing material stainless steel - version with jet ring	32
Amamix 600, 60 Hz, n = 585 rpm, motor housing material gray cast iron - version with jet ring	34
Amamix 600, 60 Hz, n = 585 rpm, motor housing material stainless steel - version with jet ring	36
Accessories	38
Overview of accessories	38
Accessories (valid for all countries except the U.S.A.)	41
Accessories (valid for the U.S.A.)	75
Scope of supply	77
General assembly drawings with list of components	79
Amamix 200 - motor housing material gray cast iron	79
Amamix 200 - motor housing material stainless steel	80
Amamix 300/400/600 - motor housing material gray cast iron	81
Amamix 300/400/600 - motor housing material stainless steel	82
Selection of Submersible Mixers	83

Waste Water

Submersible Mixer

Amamix



Main applications

- Mixing
- Homogenization
- Sludge thickening
- Sludge holding tanks
- Primary sedimentation tanks
- Secondary sedimentation tanks
- Heat transfer optimization
- Maintaining clean pump sumps
- Preventing the formation of deposits at tank walls and floors
- Breaking up and transporting floating sludge

Fluids handled

- Industrial waste water
- Sewage containing feces
- Fecal-free waste water
- Activated sludge
- Digested sludge
- Raw sludge

Operating data

Operating properties

Characteristic	Value
Propeller diameter	D 9" - 25" [225 - 630 mm]
Power range	P Up to 15 hp [11.2 kW]
Fluid temperature	t Up to 104 °F [40 °C]
Installation depth	H Up to 130 ft [30 m]

Designation

Example: Amamix C 57 3 1 R / 10 12 XD G

Key to the designation

Code	Description
Amamix	Type series
C	Propeller material
C	Stainless steel
57	Nominal propeller diameter, e.g. 570 mm
3	Number of blades
2, 3	
1	Code for incidence angle of propeller
1, 5, 6, 8	
R	1) Version without jet ring
R	Version with jet ring
10	Motor size
0, 2, 3, 4, 6, 8, 10	
12	Number of motor poles
4, 6, 8, 12	
XD	Motor version
UD/UM	Standard
XD	Explosion-proof T3
C	Motor housing material
C	Stainless steel
G	Gray cast iron

Design details

Design

- Fully flooded submersible mixer
- Horizontal installation (with adjustable pitch)

Propeller

- Self-cleaning (ECB) propeller

Shaft seal

- Two bi-directional mechanical seals in tandem arrangement, with liquid reservoir

Bearings

- Grease-packed rolling element bearings sealed for life

Drive

- Three-phase asynchronous squirrel-cage motor
- Version with explosion protection to NEC 500: Explosion-proof for Class I, Division 1, Groups C and D, T3, hazardous (classified) locations.

1) Blank

Materials

Overview of available materials to ASME

Component		Motor housing material	
		Gray cast iron	Stainless steel
Motor housing		A 48 Class 40 B	A 276 Type 316 Ti
Motor housing cover		A 48 Class 40 B	A 890 CD 4 MCu
Casing cover		A 48 Class 40 B	A 276 Type 316 Ti
Propeller		A 276 Type 316 Ti	
Adapter ²⁾		PU ³⁾	
Mechanical seal	Propeller end	SiC/SiC	
	Drive end	SiC/SiC	
Shaft		A 276 Type 316 Ti ⁴⁾	
Elastomer seals		Viton (FKM)	
Screws/bolts		Stainless steel ⁵⁾	
Guide bracket		A 48 Class 40 B	A 276 Type 316 Ti
Supporting clamp		A 276 Type 316 Ti	
Jet ring (optional)		A 276 Type 316 Ti	

Overview of available materials to EN

Component		Motor housing material	
		Gray cast iron	Stainless steel
Motor housing		EN-GJL-250	1.4581
Motor housing cover		EN-GJL-250	1.4517
Casing cover		EN-GJL-250	1.4571
Propeller		1.4571	
Adapter ²⁾		PU ³⁾	
Mechanical seal	Propeller end	SiC/SiC	
	Drive end	SiC/SiC	
Shaft		1.4571 ⁶⁾	
Elastomer seals		Viton (FPM)	
Screws/bolts		A4 ⁷⁾	
Guide bracket		EN-GJL-250	1.4571
Supporting clamp		1.4571	
Jet ring (optional)		1.4571	


Product benefits

- High operating reliability due to dry, pressure-tight and encapsulated squirrel-cage motor, thermal class F
- Increased reliability due to bi-directional mechanical seal
- Temperature sensors prevent overheating of the motor
- Marked reduction of energy costs due to optimized propeller design
- Environmentally friendly oil fill
- Ease of service with bolts made of stainless steel which are easy to undo even after years of operation
- Absolutely watertight cable entry

Design and selection information

Minimum level of fluid handled

The submersible mixer is operational when the fluid level is not lower than dimension W_T . This minimum level of the fluid handled must also be ensured during automatic operation.

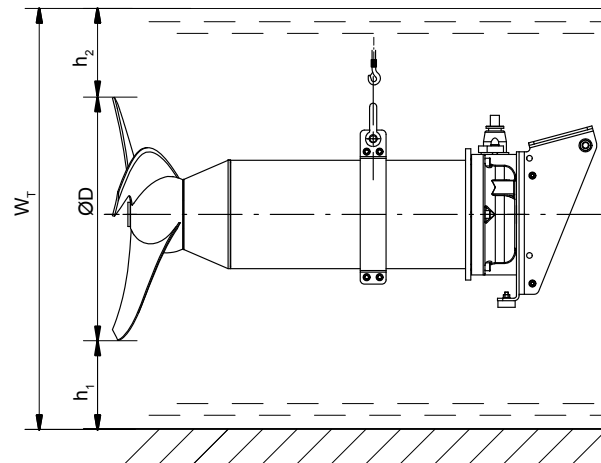

Minimum level of fluid handled

Minimum level of fluid handled

$\varnothing D$		$h_{1 \min}$		$h_{2 \min}$		$W_{T \min}$	
["]	[mm]	["]	[m]	["]	[m]	["]	[m]
8	200	4	0,11	20	0,50	32	0,82
12	300	6	0,15	31	0,80	49	1,25
20	400	8	0,20	33	0,85	57	1,45
24	600	12	0,30	39	1,00	75	1,90

A minimum distance h_1 should also be kept from any vertical walls. If more than one submersible mixer is installed, the mixers should be spaced at a distance $\varnothing D$. Reflections of the water jet and flow turbulence must be taken into account.

With accessories set 6 for shallow tanks and racetracks, the floor clearance h_1 can be reduced to 2" [approx. 50 mm]. Condition: solid floor (concrete/steel/plastics)

- 2) Not for 200 G
3) Polyurethane
4) Amamix 600 G in A 276 Type 420
5) Equivalent to A 276 Type 316 Ti
6) Amamix 600 G in 1.4021
7) Equivalent to 1.4571

Overview of product features / selection tables

Overview of product features

Overview of product features

Feature	Motor housing material							
	Amamix 200		Amamix 300		Amamix 400		Amamix 600	
	Gray cast iron	Stainless steel	Gray cast iron	Stainless steel	Gray cast iron	Stainless steel	Gray cast iron	Stainless steel
Number of motor poles								
4	1 4 UD/XD 2 4 UD/XD		-		-		-	-
6	-		0 6 UD/XD 2 6 UD/XD		-		-	-
8	-		-		3 8 UD/XD 4 8 UD/XD		-	-
12	-		-		-		6 12 UD/XD 10 12 UD/XD	4 12 UM 8 12 UM
Power range	Up to 3.4 hp [2.5 kW]		Up to 4.7 hp [3.5 kW]		Up to 6 hp [4.5 kW]		Up to 15 hp [11.2 kW]	
Explosion protection								
Version UD/UM	-							
Version XD	 or  Explosion-proof Class I, Division 1, Groups C & D, T3							-
Motor								
Starting method	DOL				DOL or star-delta			
Voltage and frequency	460 V ⁸⁾ 60 Hz, suitable for frequency inverter operation							
Cooling	Cooled by surrounding fluid							
Immersion depth	Up to 130 ft [30 m]							
Power cable								
Length	30 ft [10 m] ⁹⁾							
Cable entry	Absolutely watertight							
Type	See table "Overview of power cables"							
Bearings	Grease-packed rolling element bearings sealed for life							
Sealing elements								
Elastomer seals	Viton (fluorocarbon rubber FPM)							
Shaft seal	Bellows-type mechanical seal ¹⁰⁾							
Monitoring equipment								
Winding temperature	PTC							
Motor leakage	Leakage sensor in the motor space							
Mechanical seal leakage	Optional: leakage sensor in the oil chamber (UD/UM version only)							
Coating								
Motor housing material G	Two-component epoxy resin coating							
Motor housing material C	-							
Permissible fluid temperature	104 °F [40 °C] ¹¹⁾							
Acceptance tests	To ISO 9001 ¹²⁾							
Installation types								
Stationary	Installation depth up to 130 ft [30 m]							

Overview of power cables

Feature	S1BN8-F rubber-sheathed cable	S07RC4N8-F rubber-sheathed cable	TEHSITE Tefzel cable
Design	Standard	Optional	Optional
Rated voltage	1000 V	750 V	750 V
EMC screening	-	✓	-
Insulation material	EPR ¹³⁾	EPR ¹³⁾	ETFE ¹⁴⁾

- 8) Optional: 575 V
 9) Optional: 50 ft [15 m], 65 ft [20 m], > 65 ft [20 m] on request
 10) Optional: mechanical seal with covered spring
 11) Higher fluid temperatures on request
 12) Optional: with test report EN 10204-2.2
 13) EPR = ethylene propylene rubber
 14) ETFE = ethylene tetrafluoroethylene

Feature	S1BN8-F rubber-sheathed cable	S07RC4N8-F rubber-sheathed cable	TEHSITE Tefzel cable
Max. continuous temperature of insulation	194 °F [90 °C]	194 °F [90 °C]	275 °F [135 °C]
For permanent immersion in waste water to DIN VDE 0282-16/HD22.16	✓	✓	✓


Submersible mixer / motor combinations

Overview of submersible mixer / motor combinations

Size	Motors									
	1 4	2 4	0 6	2 6	3 8	4 8	4 12	6 12	8 12	10 12
Motor housing material gray cast iron										
200 G	X	X	-	-	-	-	-	-	-	-
300 G	-	-	X	X	-	-	-	-	-	-
400 G	-	-	-	-	X	X	-	-	-	-
600 G	-	-	-	-	-	-	-	X	-	X
Motor housing material stainless steel										
200 C	X	X	-	-	-	-	-	-	-	-
300 C	-	-	X	X	-	-	-	-	-	-
400 C	-	-	-	-	X	X	-	-	-	-
600 C	-	-	-	-	-	-	X	-	X	-

Dimensions

Amamix 200, 60 Hz, $n = 1750$ rpm, motor housing material gray cast iron - version without jet ring

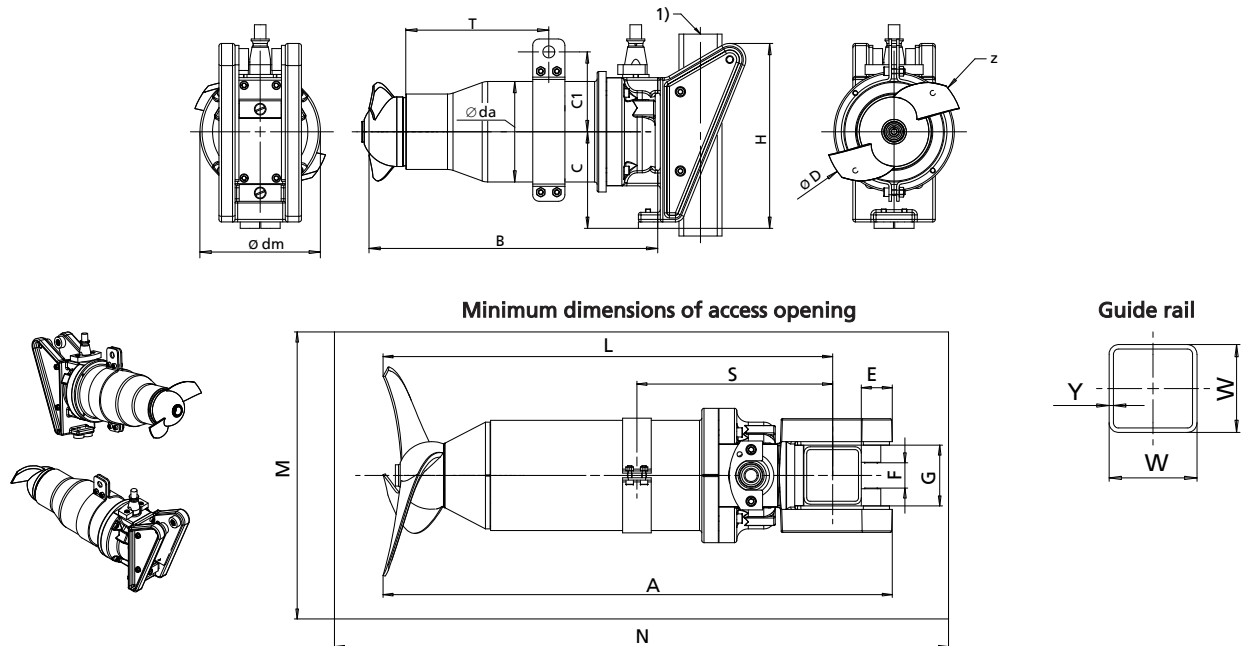

1) = guide rail

Technical data valid for the U.S.A.

Size	P_2 [hp]	[lbs] ¹⁵⁾	$z^{16)}$	Guide rail	
				W ["]	Y ["]
C 2222 / 1 4 UDG / XDG	1,7	77	2	2	$\frac{1}{8}$
C 2222 / 2 4 UDG / XDG	3,4	83	2	2	$\frac{1}{8}$
C 2223 / 2 4 UDG / XDG	3,4	83	2	2	$\frac{1}{8}$
C 2227 / 2 4 UDG / XDG	3,4	83	2	2	$\frac{1}{8}$

Technical data valid for all countries except the U.S.A.

Size	P_2 [kW]	[kg] ¹⁵⁾	$z^{16)}$	Guide rail	
				W [mm]	Y [mm]
C 2222 / 1 4 UDG / XDG	1,25	35	2	60	3
C 2222 / 2 4 UDG / XDG	2,5	37,7	2	60	3
C 2223 / 2 4 UDG / XDG	2,5	37,7	2	60	3
C 2227 / 2 4 UDG / XDG	2,5	37,7	2	60	3

Dimensions ["] valid for the U.S.A.

Size	A	B	C	C1	ØD	Øda	Ød1
C 2222 / 1 4 UDG / XDG	23 $\frac{7}{16}$	18 $\frac{1}{16}$	5 $\frac{7}{8}$	4 $\frac{7}{8}$	~8 $\frac{7}{8}$	6 $\frac{1}{8}$	7 $\frac{3}{8}$
C 2222 / 2 4 UDG / XDG	23 $\frac{7}{16}$	18 $\frac{1}{16}$	5 $\frac{7}{8}$	4 $\frac{7}{8}$	~8 $\frac{7}{8}$	6 $\frac{1}{8}$	7 $\frac{3}{8}$
C 2223 / 2 4 UDG / XDG	23 $\frac{7}{16}$	18 $\frac{1}{16}$	5 $\frac{7}{8}$	4 $\frac{7}{8}$	~8 $\frac{7}{8}$	6 $\frac{1}{8}$	7 $\frac{3}{8}$
C 2227 / 2 4 UDG / XDG	23 $\frac{7}{16}$	18 $\frac{1}{16}$	5 $\frac{7}{8}$	4 $\frac{7}{8}$	~8 $\frac{7}{8}$	6 $\frac{1}{8}$	7 $\frac{3}{8}$

¹⁵⁾ Incl. 30 ft [10 m] power cable and guide bracket

¹⁶⁾ z = number of blades

 Dimensions ["] valid for the U.S.A.

Size	E	F	G	H	L	M	N	S	T
C 2222 / 1 4 UDG / XDG	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	20 ⁵ / ₈	8 ⁷ / ₈	30 ¹¹ / ₁₆	8 ¹ / ₄	9 ⁷ / ₁₆
C 2222 / 2 4 UDG / XDG	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	20 ⁵ / ₈	8 ⁷ / ₈	30 ¹¹ / ₁₆	8 ⁷ / ₁₆	9 ¹ / ₄
C 2223 / 2 4 UDG / XDG	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	20 ⁵ / ₈	8 ⁷ / ₈	30 ¹¹ / ₁₆	8 ⁷ / ₁₆	9 ¹ / ₄
C 2227 / 2 4 UDG / XDG	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	20 ⁵ / ₈	8 ⁷ / ₈	30 ¹¹ / ₁₆	8 ⁷ / ₁₆	9 ¹ / ₄


 Dimensions [mm] valid for all countries except the U.S.A.

Size	A	B	C	C1	ØD	Øda	Ød1
C 2222 / 1 4 UDG / XDG	596	459	150	124	~225	156	187
C 2222 / 2 4 UDG / XDG	596	459	150	124	~225	156	187
C 2223 / 2 4 UDG / XDG	596	459	150	124	~225	156	187
C 2227 / 2 4 UDG / XDG	596	459	150	124	~225	156	187

 Dimensions [mm] valid for all countries except the U.S.A.

Size	E	F	G	H	L	M	N	S	T
C 2222 / 1 4 UDG / XDG	42	36	66	287	524	225	780	210	240
C 2222 / 2 4 UDG / XDG	42	36	66	287	524	225	780	215	235
C 2223 / 2 4 UDG / XDG	42	36	66	287	524	225	780	215	235
C 2227 / 2 4 UDG / XDG	42	36	66	287	524	225	780	215	235

Amamix 200, 60 Hz, n = 1750 rpm, motor housing material stainless steel - version without jet ring

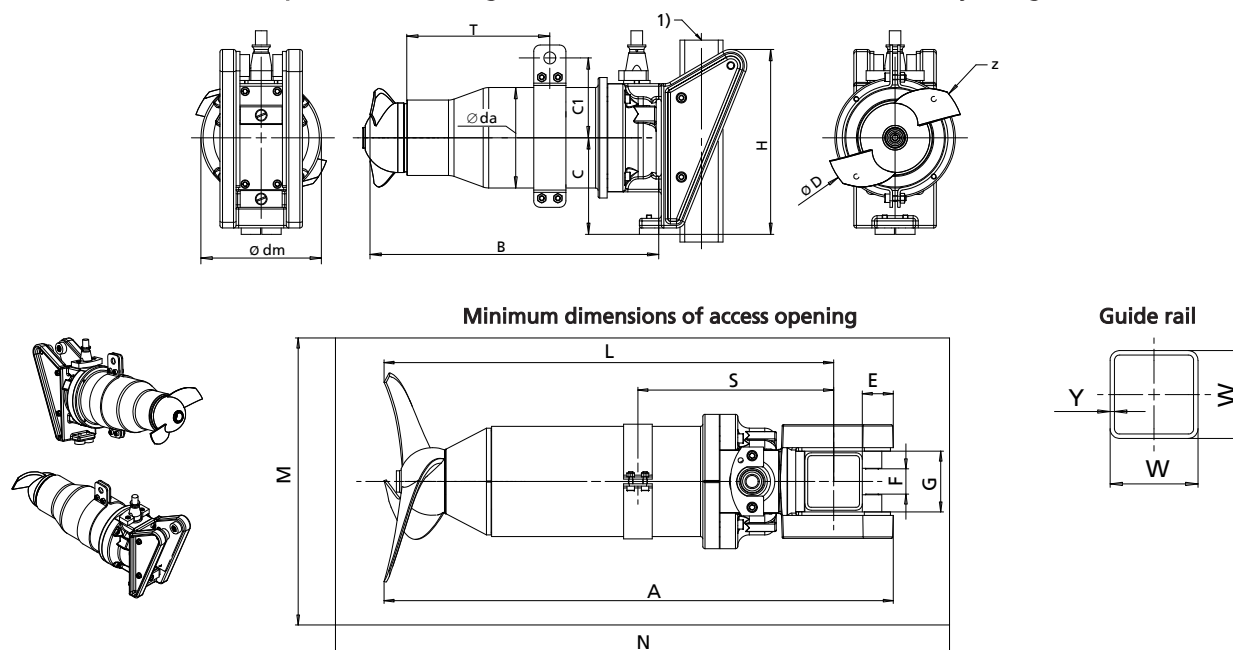

1) = guide rail

Technical data valid for the U.S.A.

Size	P ₂ [hp]	[lbs] ¹⁷⁾	z ¹⁸⁾	Guide rail	
				W ["]	Y ["]
C 2222 / 1 4 UDC / XDC	1,7	75	2	2	1/8
C 2222 / 2 4 UDC / XDC	3,4	80	2	2	1/8
C 2223 / 2 4 UDC / XDC	3,4	80	2	2	1/8
C 2227 / 2 4 UDC / XDC	3,4	80	2	2	1/8

Technical data valid for all countries except the U.S.A.

Size	P ₂ [kW]	[kg] ¹⁷⁾	z ¹⁸⁾	Guide rail	
				W [mm]	Y [mm]
C 2222 / 1 4 UDC / XDC	1,25	34	2	60	3
C 2222 / 2 4 UDC / XDC	2,5	36,5	2	60	3
C 2223 / 2 4 UDC / XDC	2,5	36,5	2	60	3
C 2227 / 2 4 UDC / XDC	2,5	36,5	2	60	3

Dimensions ["] valid for the U.S.A.

Size	A	B	C	C1	ØD	Øda	Ød1
C 2222 / 1 4 UDC / XDC	23 5/16	18 1/16	5 7/8	4 3/4	~8 7/8	5 13/16	7 3/8
C 2222 / 2 4 UDC / XDC	23 5/16	18 1/16	5 7/8	4 3/4	~8 7/8	5 13/16	7 3/8
C 2223 / 2 4 UDC / XDC	23 5/16	18 1/16	5 7/8	4 3/4	~8 7/8	5 13/16	7 3/8
C 2227 / 2 4 UDC / XDC	23 5/16	18 1/16	5 7/8	4 3/4	~8 7/8	5 13/16	7 3/8

Dimensions ["] valid for the U.S.A.

Size	E	F	G	H	L	M	N	S	T
C 2222 / 1 4 UDC / XDC	1 5/8	1 7/16	2 5/8	11 5/16	20 1/2	8 7/8	30 11/16	8 11/16	7 7/8
C 2222 / 2 4 UDC / XDC	1 5/8	1 7/16	2 5/8	11 5/16	20 1/2	8 7/8	30 11/16	8 7/8	7 11/16

¹⁷⁾ Incl. 30 ft [10 m] power cable and guide bracket

¹⁸⁾ z = number of blades

Size	E	F	G	H	L	M	N	S	T
C 2223 / 2 4 UDC / XDC	1 $\frac{5}{8}$	1 $\frac{7}{16}$	2 $\frac{5}{8}$	11 $\frac{5}{16}$	20 $\frac{1}{2}$	8 $\frac{7}{8}$	30 $\frac{11}{16}$	8 $\frac{7}{8}$	7 $\frac{11}{16}$
C 2227 / 2 4 UDC / XDC	1 $\frac{5}{8}$	1 $\frac{7}{16}$	2 $\frac{5}{8}$	11 $\frac{5}{16}$	20 $\frac{1}{2}$	8 $\frac{7}{8}$	30 $\frac{11}{16}$	8 $\frac{7}{8}$	7 $\frac{11}{16}$


i Dimensions [mm] valid for all countries except the U.S.A.

Size	A	B	C	C1	ØD	Øda	Ød1
C 2222 / 1 4 UDC / XDC	592	459	150	120	~225	148	187
C 2222 / 2 4 UDC / XDC	592	459	150	120	~225	148	187
C 2223 / 2 4 UDC / XDC	592	459	150	120	~225	148	187
C 2227 / 2 4 UDC / XDC	592	459	150	120	~225	148	187

i Dimensions [mm] valid for all countries except the U.S.A.

Size	E	F	G	H	L	M	N	S	T
C 2222 / 1 4 UDC / XDC	42	36	66	287	520	225	780	220	200
C 2222 / 2 4 UDC / XDC	42	36	66	287	520	225	780	225	195
C 2223 / 2 4 UDC / XDC	42	36	66	287	520	225	780	225	195
C 2227 / 2 4 UDC / XDC	42	36	66	287	520	225	780	225	195

Amamix 300, 60 Hz, n = 1160 rpm, motor housing material gray cast iron - version without jet ring

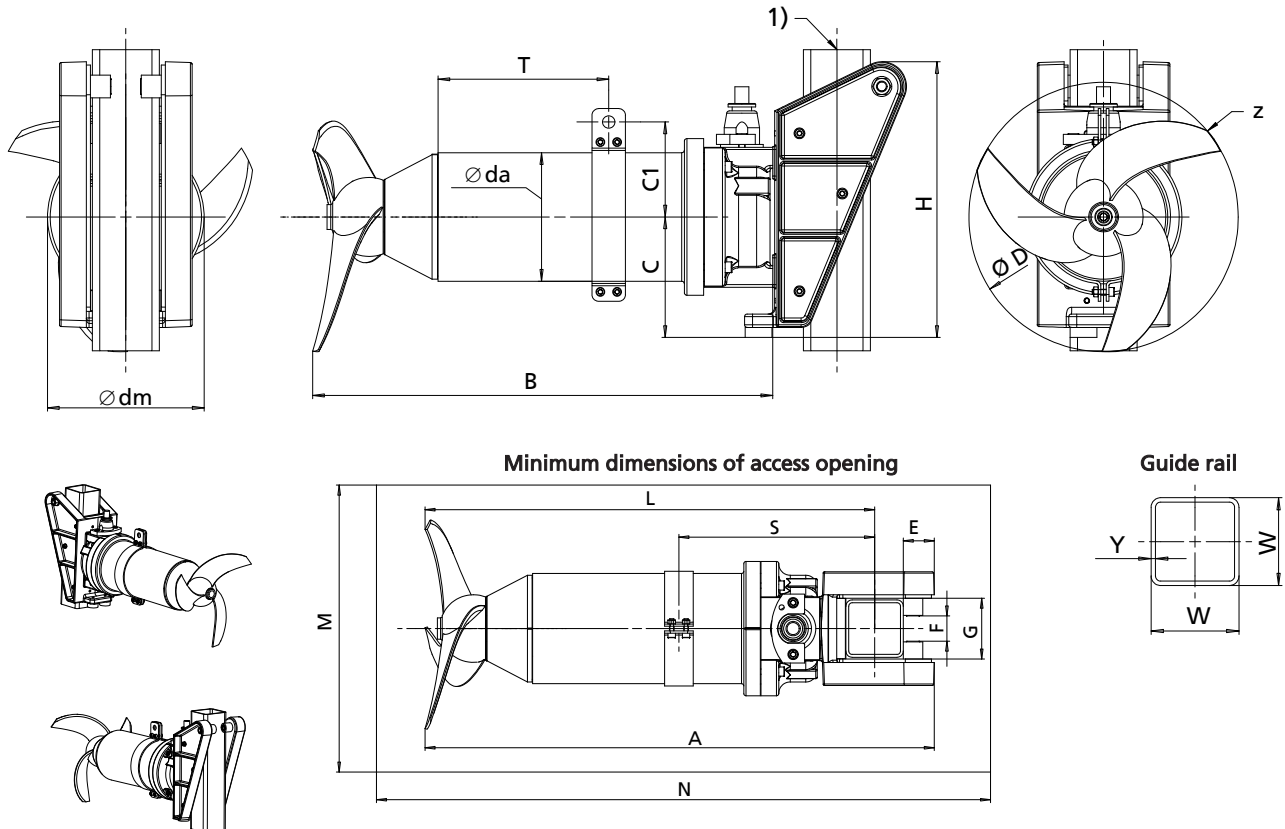

1) = guide rail

Technical data valid for the U.S.A.

Size	P ₂ [hp]	[lbs] ¹⁹⁾	z ²⁰⁾	Guide rail	
				W ["]	Y ["]
C 2925 / 0 6 UDG / XDG	2,8	118	2	2	1/8
C 2925 / 2 6 UDG / XDG	4,7	118	2	2	1/8
C 2928 / 0 6 UDG / XDG	2,8	118	2	2	1/8
C 2928 / 2 6 UDG / XDG	4,7	118	2	2	1/8
C 2936 / 2 6 UDG / XDG	4,7	118	3	2	1/8
C 2938 / 2 6 UDG / XDG	4,7	118	3	2	1/8
C 3225 / 0 6 UDG / XDG	2,8	118	2	2	1/8
C 3225 / 2 6 UDG / XDG	4,7	118	2	2	1/8
C 3228 / 2 6 UDG / XDG	4,7	118	2	2	1/8
C 3236 / 2 6 UDG / XDG	4,7	118	3	2	1/8

Technical data valid for all countries except the U.S.A.

Size	P ₂ [kW]	[kg] ¹⁹⁾	z ²⁰⁾	Guide rail	
				W [mm]	Y [mm]
C 2925 / 0 6 UDG / XDG	2,1	53,5	2	60	3
C 2925 / 2 6 UDG / XDG	3,5	53,5	2	60	3
C 2928 / 0 6 UDG / XDG	2,1	53,5	2	60	3
C 2928 / 2 6 UDG / XDG	3,5	53,5	2	60	3
C 2936 / 2 6 UDG / XDG	3,5	53,5	3	60	3
C 2938 / 2 6 UDG / XDG	3,5	53,5	3	60	3
C 3225 / 0 6 UDG / XDG	2,1	53,5	2	60	3

¹⁹⁾ Incl. 30 ft [10 m] power cable and guide bracket

²⁰⁾ z = number of blades

Size	P ₂ [kW]	[kg] ¹⁹⁾	z ²⁰⁾	Guide rail	
				W [mm]	Y [mm]
C 3225 / 2 6 UDG / XDG	3,5	53,5	2	60	3
C 3228 / 2 6 UDG / XDG	3,5	53,5	2	60	3
C 3236 / 2 6 UDG / XDG	3,5	53,5	3	60	3

i Dimensions ["] valid for the U.S.A.

Size	A	B	C	C1	ØD	Øda	Ød1
C 2925 / 0 6 UDG / XDG	28 3/4	23 3/8	5 7/8	4 7/8	11 9/16	6 1/8	7 3/8
C 2925 / 2 6 UDG / XDG	28 3/4	23 3/8	5 7/8	4 7/8	11 9/16	6 1/8	7 3/8
C 2928 / 0 6 UDG / XDG	28 3/4	23 3/8	5 7/8	4 7/8	11 9/16	6 1/8	7 3/8
C 2928 / 2 6 UDG / XDG	28 3/4	23 3/8	5 7/8	4 7/8	11 9/16	6 1/8	7 3/8
C 2936 / 2 6 UDG / XDG	28 3/4	23 3/8	5 7/8	4 7/8	11 9/16	6 1/8	7 3/8
C 2938 / 2 6 UDG / XDG	28 3/4	23 3/8	5 7/8	4 7/8	11 9/16	6 1/8	7 3/8
C 3225 / 0 6 UDG / XDG	28 3/4	23 3/8	5 7/8	4 7/8	12 13/16	6 1/8	7 3/8
C 3225 / 2 6 UDG / XDG	28 3/4	23 3/8	5 7/8	4 7/8	12 13/16	6 1/8	7 3/8
C 3228 / 2 6 UDG / XDG	28 3/4	23 3/8	5 7/8	4 7/8	12 13/16	6 1/8	7 3/8
C 3236 / 2 6 UDG / XDG	28 3/4	23 3/8	5 7/8	4 7/8	12 13/16	6 1/8	7 3/8

i Dimensions ["] valid for the U.S.A.

Size	E	F	G	H	L	M	N	S	T
C 2925 / 0 6 UDG / XDG	1 5/8	1 7/16	2 5/8	11 5/16	25 15/16	10 13/16	35 13/16	10 9/16	9 1/16
C 2925 / 2 6 UDG / XDG	1 5/8	1 7/16	2 5/8	11 5/16	25 15/16	10 13/16	35 13/16	10 9/16	9 1/16
C 2928 / 0 6 UDG / XDG	1 5/8	1 7/16	2 5/8	11 5/16	25 15/16	10 13/16	35 13/16	10 9/16	9 1/16
C 2928 / 2 6 UDG / XDG	1 5/8	1 7/16	2 5/8	11 5/16	25 15/16	10 13/16	35 13/16	10 9/16	9 1/16
C 2936 / 2 6 UDG / XDG	1 5/8	1 7/16	2 5/8	11 5/16	25 15/16	14 3/4	35 13/16	10 9/16	9 1/16
C 2938 / 2 6 UDG / XDG	1 5/8	1 7/16	2 5/8	11 5/16	25 15/16	14 3/4	35 13/16	10 9/16	9 1/16
C 3225 / 0 6 UDG / XDG	1 5/8	1 7/16	2 5/8	11 5/16	25 15/16	10 13/16	35 13/16	10 9/16	9 1/16
C 3225 / 2 6 UDG / XDG	1 5/8	1 7/16	2 5/8	11 5/16	25 15/16	10 13/16	35 13/16	10 9/16	9 1/16
C 3228 / 2 6 UDG / XDG	1 5/8	1 7/16	2 5/8	11 5/16	25 15/16	10 13/16	35 13/16	10 9/16	9 1/16
C 3236 / 2 6 UDG / XDG	1 5/8	1 7/16	2 5/8	11 5/16	25 15/16	14 3/4	35 13/16	10 9/16	9 1/16


i Dimensions [mm] valid for all countries except the U.S.A.

Size	A	B	C	C1	ØD	Øda	Ød1
C 2925 / 0 6 UDG / XDG	731	594	150	124	294	156	187
C 2925 / 2 6 UDG / XDG	731	594	150	124	294	156	187
C 2928 / 0 6 UDG / XDG	731	594	150	124	294	156	187
C 2928 / 2 6 UDG / XDG	731	594	150	124	294	156	187
C 2936 / 2 6 UDG / XDG	731	594	150	124	294	156	187
C 2938 / 2 6 UDG / XDG	731	594	150	124	294	156	187
C 3225 / 0 6 UDG / XDG	731	594	150	124	325	156	187
C 3225 / 2 6 UDG / XDG	731	594	150	124	325	156	187
C 3228 / 2 6 UDG / XDG	731	594	150	124	325	156	187
C 3236 / 2 6 UDG / XDG	731	594	150	124	325	156	187

i Dimensions [mm] valid for all countries except the U.S.A.

Size	E	F	G	H	L	M	N	S	T
C 2925 / 0 6 UDG / XDG	42	36	66	287	659	275	910	268	230
C 2925 / 2 6 UDG / XDG	42	36	66	287	659	275	910	268	230
C 2928 / 0 6 UDG / XDG	42	36	66	287	659	275	910	268	230
C 2928 / 2 6 UDG / XDG	42	36	66	287	659	275	910	268	230
C 2936 / 2 6 UDG / XDG	42	36	66	287	659	375	910	268	230
C 2938 / 2 6 UDG / XDG	42	36	66	287	659	375	910	268	230
C 3225 / 0 6 UDG / XDG	42	36	66	287	659	275	910	268	230
C 3225 / 2 6 UDG / XDG	42	36	66	287	659	275	910	268	230
C 3228 / 2 6 UDG / XDG	42	36	66	287	659	275	910	268	230
C 3236 / 2 6 UDG / XDG	42	36	66	287	659	375	910	268	230

Amamix 300, 60 Hz, n = 1160 rpm, motor housing material stainless steel - version without jet ring

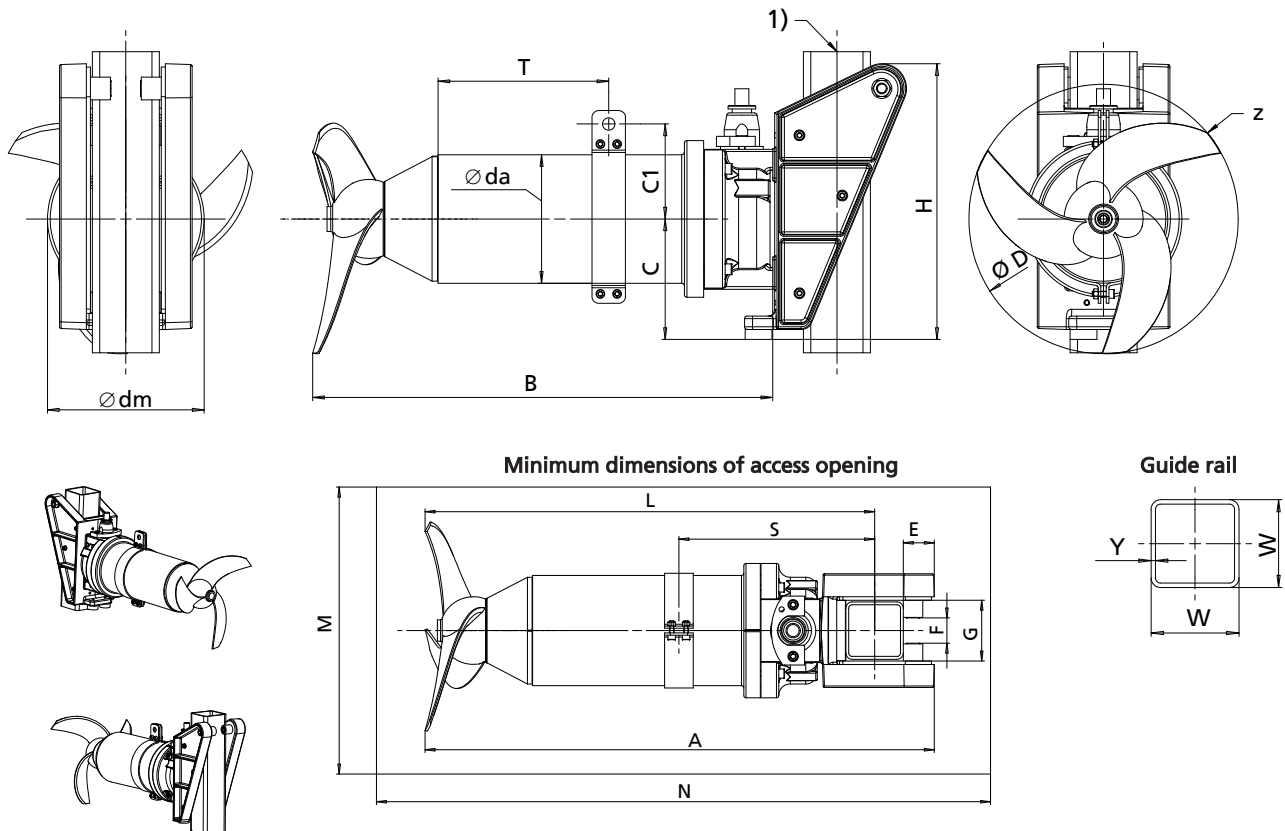

1) = guide rail

Technical data valid for the U.S.A.

Size	P ₂ [hp]	[lbs] ²¹⁾	z ²²⁾	Guide rail	
				W ["]	Y ["]
C 2925 / 0 6 UDC / XDC	2,8	103	2	2	1/8
C 2925 / 2 6 UDC / XDC	4,7	103	2	2	1/8
C 2928 / 0 6 UDC / XDC	2,8	103	2	2	1/8
C 2928 / 2 6 UDC / XDC	4,7	103	2	2	1/8
C 3225 / 0 6 UDC / XDC	2,8	103	2	2	1/8
C 3225 / 2 6 UDC / XDC	4,7	103	2	2	1/8
C 2936 / 2 6 UDC / XDC	4,7	103	3	2	1/8
C 2938 / 2 6 UDC / XDC	4,7	103	3	2	1/8
C 3228 / 2 6 UDC / XDC	4,7	103	2	2	1/8
C 3236 / 2 6 UDC / XDC	4,7	103	3	2	1/8

Technical data valid for all countries except the U.S.A.

Size	P ₂ [kW]	[kg] ²¹⁾	z ²²⁾	Guide rail	
				W [mm]	Y [mm]
C 2925 / 0 6 UDC / XDC	2,1	47	2	60	3
C 2925 / 2 6 UDC / XDC	3,5	47	2	60	3
C 2928 / 0 6 UDC / XDC	2,1	47	2	60	3
C 2928 / 2 6 UDC / XDC	3,5	47	2	60	3
C 3225 / 0 6 UDC / XDC	2,1	47	2	60	3
C 3225 / 2 6 UDC / XDC	3,5	47	2	60	3
C 2936 / 2 6 UDC / XDC	3,5	47	3	60	3

²¹⁾ Incl. 30 ft [10 m] power cable and guide bracket

²²⁾ z = number of blades

Size	P ₂ [kW]	[kg] ²¹⁾	z ²²⁾	Guide rail	
				W [mm]	Y [mm]
C 2938 / 2 6 UDC / XDC	3,5	47	3	60	3
C 3228 / 2 6 UDC / XDC	3,5	47	2	60	3
C 3236 / 2 6 UDC / XDC	3,5	47	3	60	3

i Dimensions ["] valid for the U.S.A.

Size	A	B	C	C1	ØD	Øda	Ødm
C 2925 / 0 6 UDC / XDC	28 ⁵ / ₈	23 ³ / ₈	5 ⁷ / ₈	4 ³ / ₄	11 ⁹ / ₁₆	5 ¹³ / ₁₆	7 ³ / ₈
C 2925 / 2 6 UDC / XDC	28 ⁵ / ₈	23 ³ / ₈	5 ⁷ / ₈	4 ³ / ₄	11 ⁹ / ₁₆	5 ¹³ / ₁₆	7 ³ / ₈
C 2928 / 0 6 UDC / XDC	28 ⁵ / ₈	23 ³ / ₈	5 ⁷ / ₈	4 ³ / ₄	11 ⁹ / ₁₆	5 ¹³ / ₁₆	7 ³ / ₈
C 2928 / 2 6 UDC / XDC	28 ⁵ / ₈	23 ³ / ₈	5 ⁷ / ₈	4 ³ / ₄	11 ⁹ / ₁₆	5 ¹³ / ₁₆	7 ³ / ₈
C 2936 / 2 6 UDC / XDC	28 ⁵ / ₈	23 ³ / ₈	5 ⁷ / ₈	4 ³ / ₄	11 ⁹ / ₁₆	5 ¹³ / ₁₆	7 ³ / ₈
C 2938 / 2 6 UDC / XDC	28 ⁵ / ₈	23 ³ / ₈	5 ⁷ / ₈	4 ³ / ₄	11 ⁹ / ₁₆	5 ¹³ / ₁₆	7 ³ / ₈
C 3225 / 0 6 UDC / XDC	28 ⁵ / ₈	23 ³ / ₈	5 ⁷ / ₈	4 ³ / ₄	12 ¹³ / ₁₆	5 ¹³ / ₁₆	7 ³ / ₈
C 3225 / 2 6 UDC / XDC	28 ⁵ / ₈	23 ³ / ₈	5 ⁷ / ₈	4 ³ / ₄	12 ¹³ / ₁₆	5 ¹³ / ₁₆	7 ³ / ₈
C 3228 / 2 6 UDC / XDC	28 ⁵ / ₈	23 ³ / ₈	5 ⁷ / ₈	4 ³ / ₄	12 ¹³ / ₁₆	5 ¹³ / ₁₆	7 ³ / ₈
C 3236 / 2 6 UDC / XDC	28 ⁵ / ₈	23 ³ / ₈	5 ⁷ / ₈	4 ³ / ₄	12 ¹³ / ₁₆	5 ¹³ / ₁₆	7 ³ / ₈

i Dimensions ["] valid for the U.S.A.

Size	E	F	G	H	L	M	N	S	T
C 2925 / 0 6 UDC / XDC	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	25 ¹³ / ₁₆	10 ¹³ / ₁₆	35 ¹³ / ₁₆	10 ³ / ₈	9 ¹ / ₁₆
C 2925 / 2 6 UDC / XDC	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	25 ¹³ / ₁₆	10 ¹³ / ₁₆	35 ¹³ / ₁₆	10 ³ / ₈	9 ¹ / ₁₆
C 2928 / 0 6 UDC / XDC	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	25 ¹³ / ₁₆	10 ¹³ / ₁₆	35 ¹³ / ₁₆	10 ³ / ₈	9 ¹ / ₁₆
C 2928 / 2 6 UDC / XDC	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	25 ¹³ / ₁₆	10 ¹³ / ₁₆	35 ¹³ / ₁₆	10 ³ / ₈	9 ¹ / ₁₆
C 2936 / 2 6 UDC / XDC	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	25 ¹³ / ₁₆	14 ³ / ₄	35 ¹³ / ₁₆	10 ³ / ₈	9 ¹ / ₁₆
C 2938 / 2 6 UDC / XDC	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	25 ¹³ / ₁₆	14 ³ / ₄	35 ¹³ / ₁₆	10 ³ / ₈	9 ¹ / ₁₆
C 3225 / 0 6 UDC / XDC	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	25 ¹³ / ₁₆	10 ¹³ / ₁₆	35 ¹³ / ₁₆	10 ³ / ₈	9 ¹ / ₁₆
C 3225 / 2 6 UDC / XDC	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	25 ¹³ / ₁₆	10 ¹³ / ₁₆	35 ¹³ / ₁₆	10 ³ / ₈	9 ¹ / ₁₆
C 3228 / 2 6 UDC / XDC	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	25 ¹³ / ₁₆	10 ¹³ / ₁₆	35 ¹³ / ₁₆	10 ³ / ₈	9 ¹ / ₁₆
C 3236 / 2 6 UDC / XDC	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	25 ¹³ / ₁₆	14 ³ / ₄	35 ¹³ / ₁₆	10 ³ / ₈	9 ¹ / ₁₆


i Dimensions [mm] valid for all countries except the U.S.A.

Size	A	B	C	C1	ØD	Øda	Ødm
C 2925 / 0 6 UDC / XDC	727	594	150	120	294	148	187
C 2925 / 2 6 UDC / XDC	727	594	150	120	294	148	187
C 2928 / 0 6 UDC / XDC	727	594	150	120	294	148	187
C 2928 / 2 6 UDC / XDC	727	594	150	120	294	148	187
C 2936 / 2 6 UDC / XDC	727	594	150	120	294	148	187
C 2938 / 2 6 UDC / XDC	727	594	150	120	294	148	187
C 3225 / 0 6 UDC / XDC	727	594	150	120	325	148	187
C 3225 / 2 6 UDC / XDC	727	594	150	120	325	148	187
C 3228 / 2 6 UDC / XDC	727	594	150	120	325	148	187
C 3236 / 2 6 UDC / XDC	727	594	150	120	325	148	187

i Dimensions [mm] valid for all countries except the U.S.A.

Size	E	F	G	H	L	M	N	S	T
C 2925 / 0 6 UDC / XDC	42	36	66	287	655	275	910	264	230
C 2925 / 2 6 UDC / XDC	42	36	66	287	655	275	910	264	230
C 2928 / 0 6 UDC / XDC	42	36	66	287	655	275	910	264	230
C 2928 / 2 6 UDC / XDC	42	36	66	287	655	275	910	264	230
C 2936 / 2 6 UDC / XDC	42	36	66	287	655	375	910	264	230
C 2938 / 2 6 UDC / XDC	42	36	66	287	655	375	910	264	230
C 3225 / 0 6 UDC / XDC	42	36	66	287	655	275	910	264	230
C 3225 / 2 6 UDC / XDC	42	36	66	287	655	275	910	264	230
C 3228 / 2 6 UDC / XDC	42	36	66	287	655	275	910	264	230
C 3236 / 2 6 UDC / XDC	42	36	66	287	655	375	910	264	230

Amamix 400, 60 Hz, n = 875 rpm, motor housing material gray cast iron - version without jet ring

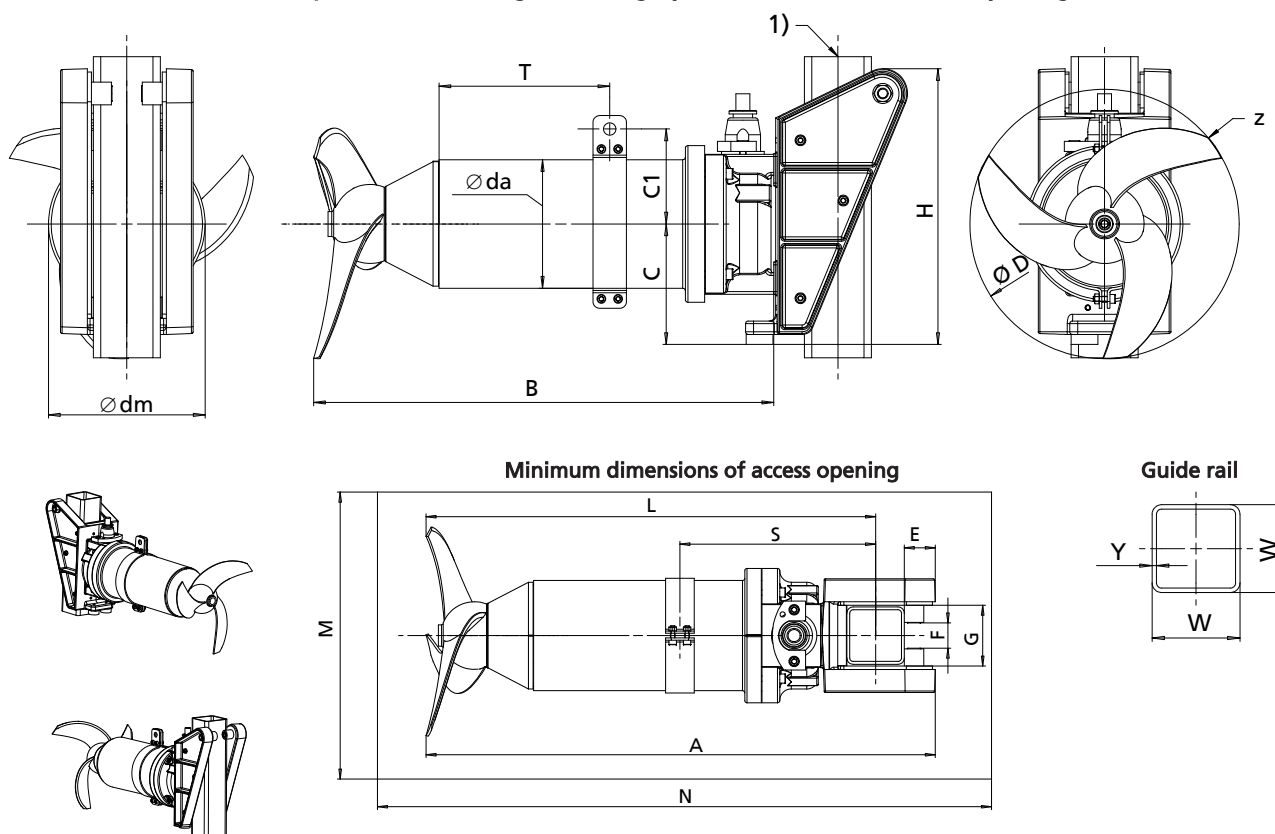

1) = guide rail

Technical data valid for the U.S.A.

Size	P ₂ [hp]	[lbs] ²³⁾	z ²⁴⁾	Guide rail	
				W ["]	Y ["]
C 3725 / 3 8 UDG / XDG	4,0	183	2	2	1/8
C 3725 / 4 8 UDG / XDG	6,0	183	2	2	1/8
C 3728 / 3 8 UDG / XDG	4,0	183	2	2	1/8
C 3728 / 4 8 UDG / XDG	6,0	183	2	2	1/8
C 3731 / 4 8 UDG / XDG	6,0	183	3	2	1/8
C 3738 / 4 8 UDG / XDG	6,0	183	3	2	1/8
C 4125 / 3 8 UDG / XDG	4,0	183	2	2	1/8
C 4125 / 4 8 UDG / XDG	6,0	183	2	2	1/8
C 4128 / 4 8 UDG / XDG	6,0	183	2	2	1/8
C 4138 / 4 8 UDG / XDG	6,0	200	3	4	3/16

Technical data valid for all countries except the U.S.A.

Size	P ₂ [kW]	[kg] ²³⁾	z ²⁴⁾	Guide rail	
				W [mm]	Y [mm]
C 3725 / 3 8 UDG / XDG	3,0	83	2	60	3
C 3725 / 4 8 UDG / XDG	4,5	83	2	60	3
C 3728 / 3 8 UDG / XDG	3,0	83	2	60	3
C 3728 / 4 8 UDG / XDG	4,5	83	2	60	3
C 3731 / 4 8 UDG / XDG	4,5	83	3	60	3
C 3738 / 4 8 UDG / XDG	4,5	83	3	60	3
C 4125 / 3 8 UDG / XDG	3,0	83	2	60	3

²³⁾ Incl. 30 ft [10 m] power cable and guide bracket

²⁴⁾ z = number of blades

Size	P ₂ [kW]	[kg] ⁽²³⁾	z ⁽²⁴⁾	Guide rail	
				W [mm]	Y [mm]
C 4125 / 4 8 UDG / XDG	4,5	83	2	60	3
C 4128 / 4 8 UDG / XDG	4,5	83	2	60	3
C 4138 / 4 8 UDG / XDG	4,5	91	3	100	5

i Dimensions ["] valid for the U.S.A.

Size	A	B	C	C1	ØD	Øda	Ød1
C 3725 / 3 8 UDG / XDG	33 1/4	27 1/16	5 7/8	5 9/16	14 11/16	7 9/16	9 3/16
C 3725 / 4 8 UDG / XDG	33 1/4	27 1/16	5 7/8	5 9/16	14 11/16	7 9/16	9 3/16
C 3728 / 3 8 UDG / XDG	33 1/4	27 1/16	5 7/8	5 9/16	14 11/16	7 9/16	9 3/16
C 3728 / 4 8 UDG / XDG	33 1/4	27 1/16	5 7/8	5 9/16	14 11/16	7 9/16	9 3/16
C 3731 / 4 8 UDG / XDG	33 1/4	27 1/16	5 7/8	5 9/16	14 11/16	7 9/16	9 3/16
C 3738 / 4 8 UDG / XDG	33 1/4	27 1/16	5 7/8	5 9/16	14 11/16	7 9/16	9 3/16
C 4125 / 3 8 UDG / XDG	33 1/4	27 1/16	5 7/8	5 9/16	16 1/8	7 9/16	9 3/16
C 4125 / 4 8 UDG / XDG	33 1/4	27 1/16	5 7/8	5 9/16	16 1/8	7 9/16	9 3/16
C 4128 / 4 8 UDG / XDG	33 1/4	27 1/16	5 7/8	5 9/16	16 1/8	7 9/16	9 3/16
C 4138 / 4 8 UDG / XDG	34 1/2	27 1/16	7 1/16	5 9/16	16 1/8	7 9/16	9 3/16

i Dimensions ["] valid for the U.S.A.

Size	E	F	G	H	L	M	N	S	T
C 3725 / 3 8 UDG / XDG	1 5/8	1 7/16	2 5/8	11 5/16	30 3/8	11 1/4	41 3/8	12 5/8	10 13/16
C 3725 / 4 8 UDG / XDG	1 5/8	1 7/16	2 5/8	11 5/16	30 3/8	11 1/4	41 3/8	12 5/8	10 13/16
C 3728 / 3 8 UDG / XDG	1 5/8	1 7/16	2 5/8	11 5/16	30 3/8	11 1/4	41 3/8	12 5/8	10 13/16
C 3728 / 4 8 UDG / XDG	1 5/8	1 7/16	2 5/8	11 5/16	30 3/8	11 1/4	41 3/8	12 5/8	10 13/16
C 3731 / 4 8 UDG / XDG	1 5/8	1 7/16	2 5/8	11 5/16	30 3/8	18 1/8	41 3/8	12 5/8	10 13/16
C 3738 / 4 8 UDG / XDG	1 5/8	1 7/16	2 5/8	11 5/16	30 3/8	18 1/8	41 3/8	12 5/8	10 13/16
C 4125 / 3 8 UDG / XDG	1 5/8	1 7/16	2 5/8	11 5/16	30 3/8	11 1/4	41 3/8	12 5/8	10 13/16
C 4125 / 4 8 UDG / XDG	1 5/8	1 7/16	2 5/8	11 5/16	30 3/8	11 1/4	41 3/8	12 5/8	10 13/16
C 4128 / 4 8 UDG / XDG	1 5/8	1 7/16	2 5/8	11 5/16	30 3/8	11 1/4	41 3/8	12 5/8	10 13/16
C 4138 / 4 8 UDG / XDG	1 11/16	1 3/4	4 3/16	16 1/4	30 13/16	18 1/8	45 1/4	12 5/8	10 13/16


i Dimensions [mm] valid for all countries except the U.S.A.

Size	A	B	C	C1	ØD	Øda	Ød1
C 3725 / 3 8 UDG / XDG	844	687	150	142	373	192	234
C 3725 / 4 8 UDG / XDG	844	687	150	142	373	192	234
C 3728 / 3 8 UDG / XDG	844	687	150	142	373	192	234
C 3728 / 4 8 UDG / XDG	844	687	150	142	373	192	234
C 3731 / 4 8 UDG / XDG	844	687	150	142	373	192	234
C 3738 / 4 8 UDG / XDG	844	687	150	142	373	192	234
C 4125 / 3 8 UDG / XDG	844	687	150	142	410	192	234
C 4125 / 4 8 UDG / XDG	844	687	150	142	410	192	234
C 4128 / 4 8 UDG / XDG	844	687	150	142	410	192	234
C 4138 / 4 8 UDG / XDG	876	687	180	142	410	192	234

i Dimensions [mm] valid for all countries except the U.S.A.

Size	E	F	G	H	L	M	N	S	T
C 3725 / 3 8 UDG / XDG	42	35	66	287	772	285	1050	321	275
C 3725 / 4 8 UDG / XDG	42	35	66	287	772	285	1050	321	275
C 3728 / 3 8 UDG / XDG	42	35	66	287	772	285	1050	321	275
C 3728 / 4 8 UDG / XDG	42	35	66	287	772	285	1050	321	275
C 3731 / 4 8 UDG / XDG	42	35	66	287	772	460	1050	321	275
C 3738 / 4 8 UDG / XDG	42	35	66	287	772	460	1050	321	275
C 4125 / 3 8 UDG / XDG	42	35	66	287	772	285	1050	321	275
C 4125 / 4 8 UDG / XDG	42	35	66	287	772	285	1050	321	275
C 4128 / 4 8 UDG / XDG	42	35	66	287	772	285	1050	321	275
C 4138 / 4 8 UDG / XDG	43	44	106	412	783	460	1150	321	275

Amamix 400, 60 Hz, n = 875 rpm, motor housing material stainless steel - version without jet ring

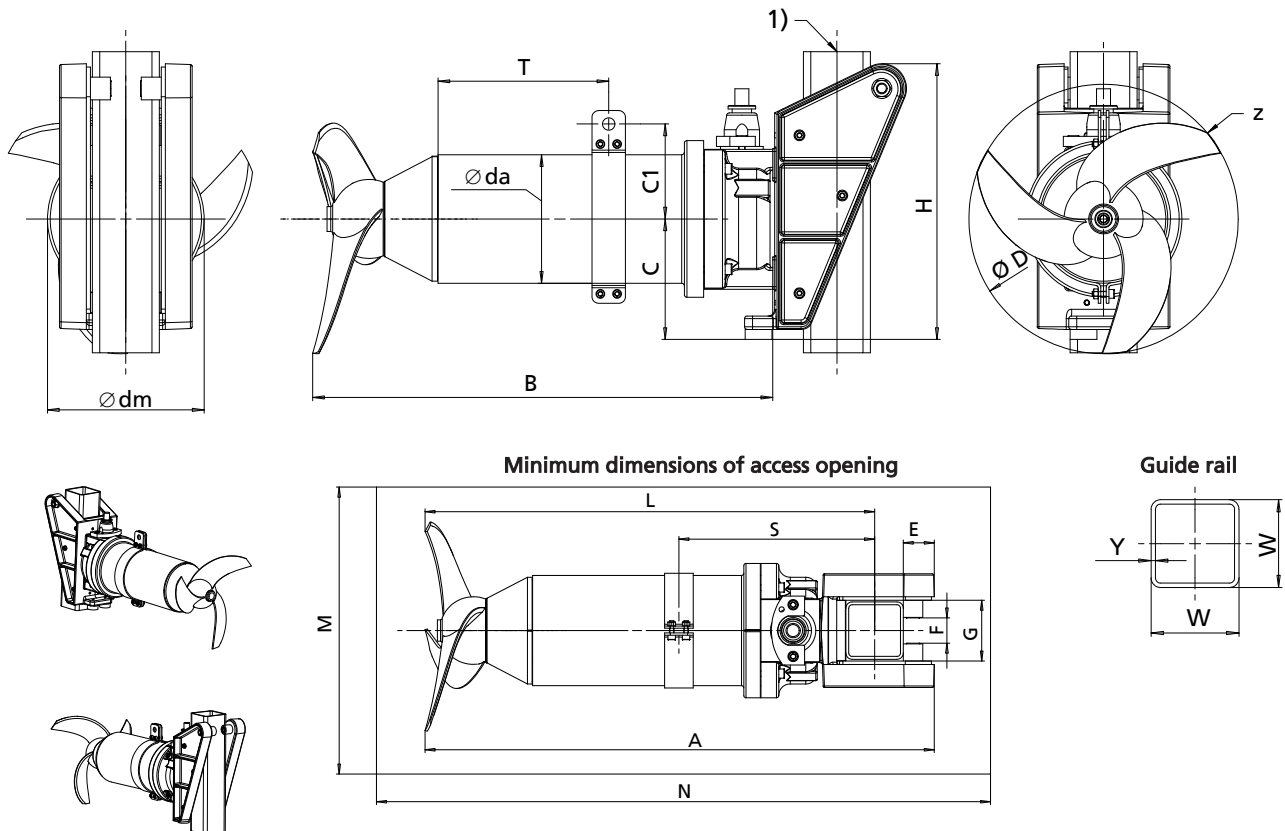

1) = guide rail

 Technical data valid for the U.S.A.

Size	P ₂ [hp]	[lbs] ²⁵⁾	z ²⁶⁾	Guide rail	
				W ["]	Y ["]
C 3725 / 3 8 UDC / XDC	4,0	181	2	2	1/8
C 3725 / 4 8 UDC / XDC	6,0	181	2	2	1/8
C 3728 / 3 8 UDC / XDC	4,0	181	2	2	1/8
C 3728 / 4 8 UDC / XDC	6,0	181	2	2	1/8
C 3731 / 4 8 UDC / XDC	6,0	181	3	2	1/8
C 3738 / 4 8 UDC / XDC	6,0	181	3	2	1/8
C 4125 / 3 8 UDC / XDC	4,0	181	2	2	1/8
C 4125 / 4 8 UDC / XDC	6,0	181	2	2	1/8
C 4128 / 4 8 UDC / XDC	6,0	181	2	2	1/8
C 4138 / 4 8 UDC / XDC	6,0	185	3	4	3/16

 Technical data valid for all countries except the U.S.A.

Size	P ₂ [kW]	[kg] ²⁵⁾	z ²⁶⁾	Guide rail	
				W [mm]	Y [mm]
C 3725 / 3 8 UDC / XDC	3,0	82,5	2	60	3
C 3725 / 4 8 UDC / XDC	4,5	82,5	2	60	3
C 3728 / 3 8 UDC / XDC	3,0	82,5	2	60	3
C 3728 / 4 8 UDC / XDC	4,5	82,5	2	60	3
C 3731 / 4 8 UDC / XDC	4,5	82,5	3	60	3
C 3738 / 4 8 UDC / XDC	4,5	82,5	3	60	3
C 4125 / 3 8 UDC / XDC	3,0	82,5	2	60	3

25) Incl. 30 ft [10 m] power cable and guide bracket

26) z = number of blades

Size	P ₂ [kW]	[kg] ²⁵⁾	z ²⁶⁾	Guide rail	
				W [mm]	Y [mm]
C 4125 / 4 8 UDC / XDC	4,5	82,5	2	60	3
C 4128 / 4 8 UDC / XDC	4,5	82,5	2	60	3
C 4138 / 4 8 UDC / XDC	4,5	84	3	100	5

i Dimensions ["] valid for the U.S.A.

Size	A	B	C	C1	ØD	Øda	Ød1
C 3725 / 3 8 UDC / XDC	34 ³ / ₈	27 ¹ / ₁₆	5 ⁷ / ₈	5 ¹ / ₂	14 ¹¹ / ₁₆	7 ⁵ / ₁₆	9 ³ / ₁₆
C 3725 / 4 8 UDC / XDC	34 ³ / ₈	27 ¹ / ₁₆	5 ⁷ / ₈	5 ¹ / ₂	14 ¹¹ / ₁₆	7 ⁵ / ₁₆	9 ³ / ₁₆
C 3728 / 3 8 UDC / XDC	34 ³ / ₈	27 ¹ / ₁₆	5 ⁷ / ₈	5 ¹ / ₂	14 ¹¹ / ₁₆	7 ⁵ / ₁₆	9 ³ / ₁₆
C 3728 / 4 8 UDC / XDC	34 ³ / ₈	27 ¹ / ₁₆	5 ⁷ / ₈	5 ¹ / ₂	14 ¹¹ / ₁₆	7 ⁵ / ₁₆	9 ³ / ₁₆
C 3731 / 4 8 UDC / XDC	34 ³ / ₈	27 ¹ / ₁₆	5 ⁷ / ₈	5 ¹ / ₂	14 ¹¹ / ₁₆	7 ⁵ / ₁₆	9 ³ / ₁₆
C 3738 / 4 8 UDC / XDC	34 ³ / ₈	27 ¹ / ₁₆	5 ⁷ / ₈	5 ¹ / ₂	14 ¹¹ / ₁₆	7 ⁵ / ₁₆	9 ³ / ₁₆
C 4125 / 3 8 UDC / XDC	34 ³ / ₈	27 ¹ / ₁₆	5 ⁷ / ₈	5 ¹ / ₂	16 ¹ / ₈	7 ⁵ / ₁₆	9 ³ / ₁₆
C 4125 / 4 8 UDC / XDC	34 ³ / ₈	27 ¹ / ₁₆	5 ⁷ / ₈	5 ¹ / ₂	16 ¹ / ₈	7 ⁵ / ₁₆	9 ³ / ₁₆
C 4128 / 4 8 UDC / XDC	34 ³ / ₈	27 ¹ / ₁₆	5 ⁷ / ₈	5 ¹ / ₂	16 ¹ / ₈	7 ⁵ / ₁₆	9 ³ / ₁₆
C 4138 / 4 8 UDC / XDC	34 ³ / ₈	27 ¹ / ₁₆	7 ¹ / ₁₆	5 ¹ / ₂	16 ¹ / ₈	7 ⁵ / ₁₆	9 ³ / ₁₆

i Dimensions ["] valid for the U.S.A.

Size	E	F	G	H	L	M	N	S	T
C 3725 / 3 8 UDC / XDC	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	30 ³ / ₈	11 ¹ / ₄	41 ³ / ₈	12 ¹ / ₂	10 ¹³ / ₁₆
C 3725 / 4 8 UDC / XDC	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	30 ³ / ₈	11 ¹ / ₄	41 ³ / ₈	12 ¹ / ₂	10 ¹³ / ₁₆
C 3728 / 3 8 UDC / XDC	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	30 ³ / ₈	11 ¹ / ₄	41 ³ / ₈	12 ¹ / ₂	10 ¹³ / ₁₆
C 3728 / 4 8 UDC / XDC	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	30 ³ / ₈	11 ¹ / ₄	41 ³ / ₈	12 ¹ / ₂	10 ¹³ / ₁₆
C 3731 / 4 8 UDC / XDC	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	30 ³ / ₈	18 ¹ / ₈	41 ³ / ₈	12 ¹ / ₂	10 ¹³ / ₁₆
C 3738 / 4 8 UDC / XDC	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	30 ³ / ₈	18 ¹ / ₈	41 ³ / ₈	12 ¹ / ₂	10 ¹³ / ₁₆
C 4125 / 3 8 UDC / XDC	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	30 ³ / ₈	11 ¹ / ₄	41 ³ / ₈	12 ¹ / ₂	10 ¹³ / ₁₆
C 4125 / 4 8 UDC / XDC	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	30 ³ / ₈	11 ¹ / ₄	41 ³ / ₈	12 ¹ / ₂	10 ¹³ / ₁₆
C 4128 / 4 8 UDC / XDC	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	30 ³ / ₈	11 ¹ / ₄	41 ³ / ₈	12 ¹ / ₂	10 ¹³ / ₁₆
C 4138 / 4 8 UDC / XDC	1 ¹¹ / ₁₆	1 ³ / ₄	4 ³ / ₁₆	16 ⁹ / ₁₆	30 ¹¹ / ₁₆	18 ¹ / ₈	45 ¹ / ₄	12 ¹ / ₂	10 ¹³ / ₁₆


i Dimensions [mm] valid for all countries except the U.S.A.

Size	A	B	C	C1	ØD	Øda	Ød1
C 3725 / 3 8 UDC / XDC	844	687	150	139	373	186	234
C 3725 / 4 8 UDC / XDC	844	687	150	139	373	186	234
C 3728 / 3 8 UDC / XDC	844	687	150	139	373	186	234
C 3728 / 4 8 UDC / XDC	844	687	150	139	373	186	234
C 3731 / 4 8 UDC / XDC	844	687	150	139	373	186	234
C 3738 / 4 8 UDC / XDC	844	687	150	139	373	186	234
C 4125 / 3 8 UDC / XDC	844	687	150	139	410	186	234
C 4125 / 4 8 UDC / XDC	844	687	150	139	410	186	234
C 4128 / 4 8 UDC / XDC	844	687	150	139	410	186	234
C 4138 / 4 8 UDC / XDC	873	687	180	139	410	186	234

i Dimensions [mm] valid for all countries except the U.S.A.

Size	E	F	G	H	L	M	N	S	T
C 3725 / 3 8 UDC / XDC	42	36	66	287	772	285	1050	318	275
C 3725 / 4 8 UDC / XDC	42	36	66	287	772	285	1050	318	275
C 3728 / 3 8 UDC / XDC	42	36	66	287	772	285	1050	318	275
C 3728 / 4 8 UDC / XDC	42	36	66	287	772	285	1050	318	275
C 3731 / 4 8 UDC / XDC	42	36	66	287	772	460	1050	318	275
C 3738 / 4 8 UDC / XDC	42	36	66	287	772	460	1050	318	275
C 4125 / 3 8 UDC / XDC	42	36	66	287	772	285	1050	318	275
C 4125 / 4 8 UDC / XDC	42	36	66	287	772	285	1050	318	275
C 4128 / 4 8 UDC / XDC	42	36	66	287	772	460	1050	318	275
C 4138 / 4 8 UDC / XDC	43	44	106	420	780	460	1150	318	275

Amamix 600, 60 Hz, n = 585 rpm, motor housing material gray cast iron - version without jet ring

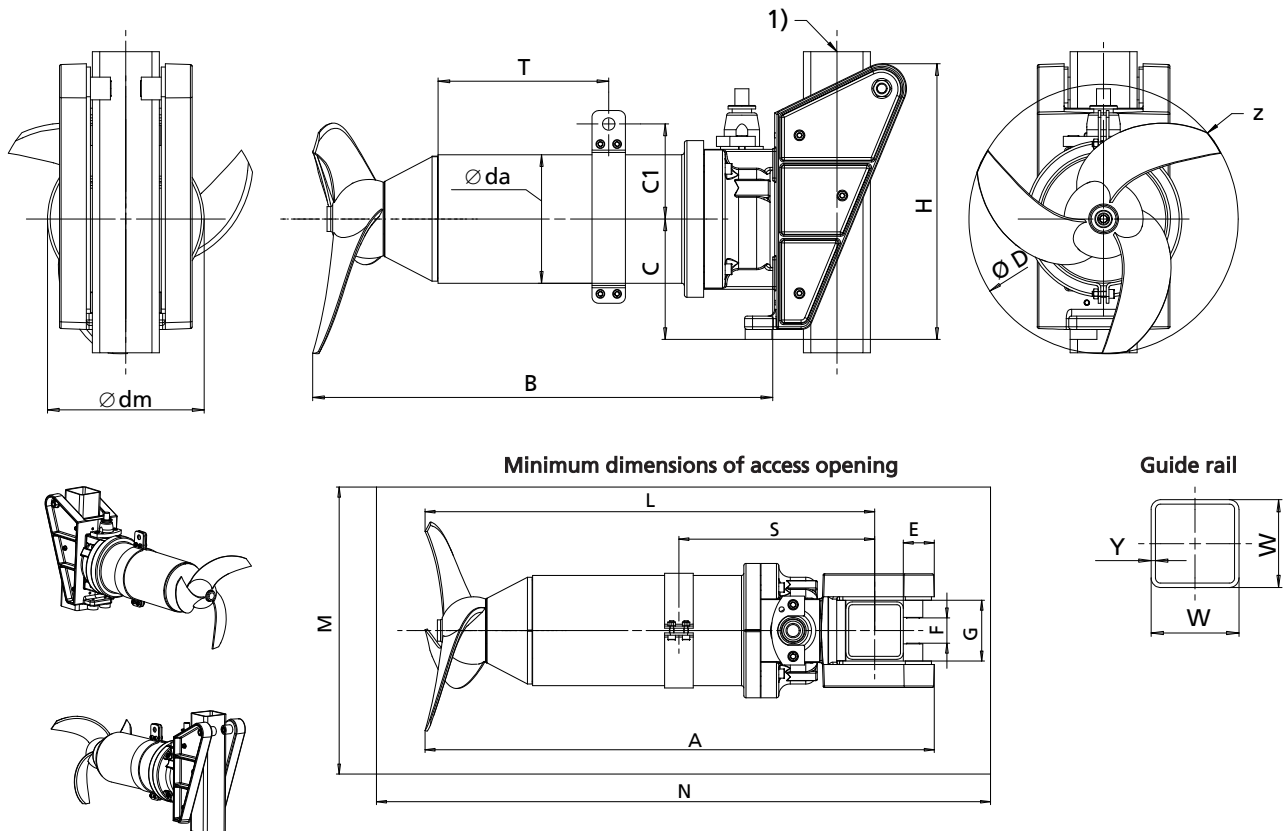

1) = guide rail

 Technical data valid for the U.S.A.

Size	P ₂ [hp]	[lbs] ²⁷⁾	z ²⁸⁾	Guide rail	
				W ["]	Y ["]
C 4825 / 6 12 UDG / XDG	7,5	486	2	4	³ / ₁₆
C 4825 / 10 12 UDG / XDG	10,0	517	2	4	³ / ₁₆
C 4828 / 6 12 UDG / XDG	7,5	486	2	4	³ / ₁₆
C 4828 / 10 12 UDG / XDG	10,0	517	2	4	³ / ₁₆
C 5725 / 6 12 UDG / XDG	7,5	486	2	4	³ / ₁₆
C 5725 / 10 12 UDG / XDG	10,0	517	2	4	³ / ₁₆
C 5728 / 10 12 UDG / XDG	10,0	517	2	4	³ / ₁₆
C 5731 / 10 12 UDG / XDG	10,0	517	3	4	³ / ₁₆
C 5738 / 10 12 UDG / XDG	10,0	517	3	4	³ / ₁₆
C 6325 / 10 12 UDG / XDG	10,0	517	2	4	³ / ₁₆
C 6328 / 10 12 UDG / XDG	10,0	517	2	4	³ / ₁₆
C 6338 / 10 12 UDG / XDG	10,0	517	3	4	³ / ₁₆

 Technical data valid for all countries except the U.S.A.

Size	P ₂ [kW]	[kg] ²⁷⁾	z ²⁸⁾	Guide rail	
				W [mm]	Y [mm]
C 4825 / 6 12 UDG / XDG	5,6	221	2	100	5
C 4825 / 10 12 UDG / XDG	11,2	235	2	100	5
C 4828 / 6 12 UDG / XDG	5,6	221	2	100	5
C 4828 / 10 12 UDG / XDG	11,2	235	2	100	5
C 5725 / 6 12 UDG / XDG	5,6	221	2	100	5

27) Incl. 30 ft [10 m] power cable and guide bracket

28) z = number of blades

Size	P ₂ [kW]	[kg] ²⁷⁾	z ²⁸⁾	Guide rail	
				W [mm]	Y [mm]
C 5725 / 10 12 UDG / XDG	11,2	235	2	100	5
C 5728 / 10 12 UDG / XDG	11,2	235	2	100	5
C 5731 / 10 12 UDG / XDG	11,2	235	3	100	5
C 5738 / 10 12 UDG / XDG	11,2	235	3	100	5
C 6325 / 10 12 UDG / XDG	11,2	235	2	100	5
C 6328 / 10 12 UDG / XDG	11,2	235	2	100	5
C 6338 / 10 12 UDG / XDG	11,2	235	3	100	5

i Dimensions ["] valid for the U.S.A.

Size	A	B	C	C1	ØD	Øda	Ød1
C 4825 / 6 12 UDG / XDG	41	33 ³ / ₈	9 ¹ / ₁₆	7 ³ / ₄	18 ⁷ / ₈	11 ⁹ / ₁₆	14 ¹⁵ / ₁₆
C 4825 / 10 12 UDG / XDG	41	33 ³ / ₈	9 ¹ / ₁₆	7 ³ / ₄	18 ⁷ / ₈	11 ⁹ / ₁₆	14 ¹⁵ / ₁₆
C 4828 / 6 12 UDG / XDG	41	33 ³ / ₈	9 ¹ / ₁₆	7 ³ / ₄	18 ⁷ / ₈	11 ⁹ / ₁₆	14 ¹⁵ / ₁₆
C 4828 / 10 12 UDG / XDG	41	33 ³ / ₈	9 ¹ / ₁₆	7 ³ / ₄	18 ⁷ / ₈	11 ⁹ / ₁₆	14 ¹⁵ / ₁₆
C 5725 / 6 12 UDG / XDG	41	33 ³ / ₈	9 ¹ / ₁₆	7 ³ / ₄	22 ⁷ / ₁₆	11 ⁹ / ₁₆	14 ¹⁵ / ₁₆
C 5725 / 10 12 UDG / XDG	41	33 ³ / ₈	9 ¹ / ₁₆	7 ³ / ₄	22 ⁷ / ₁₆	11 ⁹ / ₁₆	14 ¹⁵ / ₁₆
C 5728 / 10 12 UDG / XDG	41	33 ³ / ₈	9 ¹ / ₁₆	7 ³ / ₄	22 ⁷ / ₁₆	11 ⁹ / ₁₆	14 ¹⁵ / ₁₆
C 5731 / 10 12 UDG / XDG	41	33 ³ / ₈	9 ¹ / ₁₆	7 ³ / ₄	22 ⁷ / ₁₆	11 ⁹ / ₁₆	14 ¹⁵ / ₁₆
C 5738 / 10 12 UDG / XDG	41	33 ³ / ₈	9 ¹ / ₁₆	7 ³ / ₄	22 ⁷ / ₁₆	11 ⁹ / ₁₆	14 ¹⁵ / ₁₆
C 6325 / 10 12 UDG / XDG	41	33 ³ / ₈	9 ¹ / ₁₆	7 ³ / ₄	24 ¹³ / ₁₆	11 ⁹ / ₁₆	14 ¹⁵ / ₁₆
C 6328 / 10 12 UDG / XDG	41	33 ³ / ₈	9 ¹ / ₁₆	7 ³ / ₄	24 ¹³ / ₁₆	11 ⁹ / ₁₆	14 ¹⁵ / ₁₆
C 6338 / 10 12 UDG / XDG	41	33 ³ / ₈	9 ¹ / ₁₆	7 ³ / ₄	24 ¹³ / ₁₆	11 ⁹ / ₁₆	14 ¹⁵ / ₁₆

i Dimensions ["] valid for the U.S.A.

Size	E	F	G	H	L	M	N	S	T
C 4825 / 6 12 UDG / XDG	1 ¹¹ / ₁₆	1 ³ / ₄	4 ³ / ₁₆	20	37 ³ / ₈	17 ¹¹ / ₁₆	51 ⁹ / ₁₆	15 ¹ / ₂	11
C 4825 / 10 12 UDG / XDG	1 ¹¹ / ₁₆	1 ³ / ₄	4 ³ / ₁₆	20	37 ³ / ₈	17 ¹¹ / ₁₆	51 ⁹ / ₁₆	15 ¹ / ₂	11
C 4828 / 6 12 UDG / XDG	1 ¹¹ / ₁₆	1 ³ / ₄	4 ³ / ₁₆	20	37 ³ / ₈	17 ¹¹ / ₁₆	51 ⁹ / ₁₆	15 ¹ / ₂	11
C 4828 / 10 12 UDG / XDG	1 ¹¹ / ₁₆	1 ³ / ₄	4 ³ / ₁₆	20	37 ³ / ₈	17 ¹¹ / ₁₆	51 ⁹ / ₁₆	15 ¹ / ₂	11
C 5725 / 6 12 UDG / XDG	1 ¹¹ / ₁₆	1 ³ / ₄	4 ³ / ₁₆	20	37 ³ / ₈	17 ¹¹ / ₁₆	51 ⁹ / ₁₆	15 ¹ / ₂	11
C 5725 / 10 12 UDG / XDG	1 ¹¹ / ₁₆	1 ³ / ₄	4 ³ / ₁₆	20	37 ³ / ₈	17 ¹¹ / ₁₆	51 ⁹ / ₁₆	15 ¹ / ₂	11
C 5728 / 10 12 UDG / XDG	1 ¹¹ / ₁₆	1 ³ / ₄	4 ³ / ₁₆	20	37 ³ / ₈	17 ¹¹ / ₁₆	51 ⁹ / ₁₆	15 ¹ / ₂	11
C 5731 / 10 12 UDG / XDG	1 ¹¹ / ₁₆	1 ³ / ₄	4 ³ / ₁₆	20	37 ³ / ₈	27 ⁹ / ₁₆	51 ⁹ / ₁₆	15 ¹ / ₂	11
C 5738 / 10 12 UDG / XDG	1 ¹¹ / ₁₆	1 ³ / ₄	4 ³ / ₁₆	20	37 ³ / ₈	27 ⁹ / ₁₆	51 ⁹ / ₁₆	15 ¹ / ₂	11
C 6325 / 10 12 UDG / XDG	1 ¹¹ / ₁₆	1 ³ / ₄	4 ³ / ₁₆	20	37 ³ / ₈	17 ¹¹ / ₁₆	51 ⁹ / ₁₆	15 ¹ / ₂	11
C 6328 / 10 12 UDG / XDG	1 ¹¹ / ₁₆	1 ³ / ₄	4 ³ / ₁₆	20	37 ³ / ₈	17 ¹¹ / ₁₆	51 ⁹ / ₁₆	15 ¹ / ₂	11
C 6338 / 10 12 UDG / XDG	1 ¹¹ / ₁₆	1 ³ / ₄	4 ³ / ₁₆	20	37 ³ / ₈	27 ⁹ / ₁₆	51 ⁹ / ₁₆	15 ¹ / ₂	11


i Dimensions [mm] valid for all countries except the U.S.A.

Size	A	B	C	C1	ØD	Øda	Ød1
C 4825 / 6 12 UDG / XDG	1042	848	230	197	480	294	380
C 4825 / 10 12 UDG / XDG	1042	848	230	197	480	294	380
C 4828 / 6 12 UDG / XDG	1042	848	230	197	480	294	380
C 4828 / 10 12 UDG / XDG	1042	848	230	197	480	294	380
C 5725 / 6 12 UDG / XDG	1042	848	230	197	570	294	380
C 5725 / 10 12 UDG / XDG	1042	848	230	197	570	294	380
C 5728 / 10 12 UDG / XDG	1042	848	230	197	570	294	380
C 5731 / 10 12 UDG / XDG	1042	848	230	197	570	294	380
C 5738 / 10 12 UDG / XDG	1042	848	230	197	570	294	380
C 6325 / 10 12 UDG / XDG	1042	848	230	197	630	294	380
C 6328 / 10 12 UDG / XDG	1042	848	230	197	630	294	380
C 6338 / 10 12 UDG / XDG	1042	848	230	197	630	294	380

 Dimensions [mm] valid for all countries except the U.S.A.

Size	E	F	G	H	L	M	N	S	T
C 4825 / 6 12 UDG / XDG	43	44	106	508	949	450	1310	393	280
C 4825 / 10 12 UDG / XDG	43	44	106	508	949	450	1310	393	280
C 4828 / 6 12 UDG / XDG	43	44	106	508	949	450	1310	393	280
C 4828 / 10 12 UDG / XDG	43	44	106	508	949	450	1310	393	280
C 5725 / 6 12 UDG / XDG	43	44	106	508	949	450	1310	393	280
C 5725 / 10 12 UDG / XDG	43	44	106	508	949	450	1310	393	280
C 5728 / 10 12 UDG / XDG	43	44	106	508	949	450	1310	393	280
C 5731 / 10 12 UDG / XDG	43	44	106	508	949	700	1310	393	280
C 5738 / 10 12 UDG / XDG	43	44	106	508	949	700	1310	393	280
C 6325 / 10 12 UDG / XDG	43	44	106	508	949	450	1310	393	280
C 6328 / 10 12 UDG / XDG	43	44	106	508	949	450	1310	393	280
C 6338 / 10 12 UDG / XDG	43	44	106	508	949	700	1310	393	280

Amamix 600, 60 Hz, n = 585 rpm, motor housing material stainless steel - version without jet ring

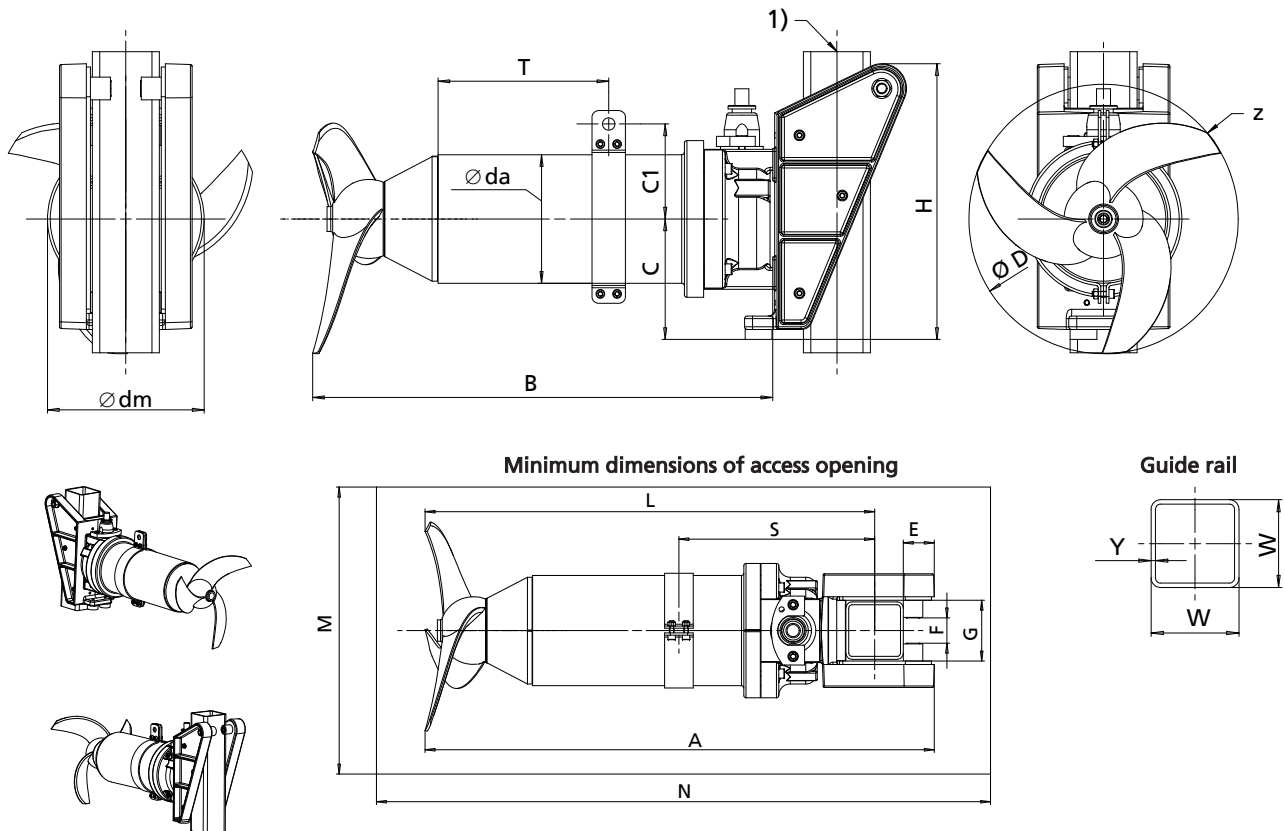

1) = guide rail

 Technical data valid for the U.S.A.

Size	P ₂ [hp]	[lbs] ²⁹⁾	z ³⁰⁾	Guide rail	
				W ["]	Y ["]
C 4825 / 4 12 UMC	7,5	321	2	4	³ / ₁₆
C 4825 / 8 12 UMC	15,0	436	2	4	³ / ₁₆
C 4828 / 4 12 UMC	7,5	321	2	4	³ / ₁₆
C 4828 / 8 12 UMC	15,0	436	2	4	³ / ₁₆
C 5725 / 4 12 UMC	7,5	321	2	4	³ / ₁₆
C 5725 / 8 12 UMC	15,0	436	2	4	³ / ₁₆
C 5728 / 8 12 UMC	15,0	436	2	4	³ / ₁₆
C 5731 / 8 12 UMC	15,0	436	3	4	³ / ₁₆
C 5738 / 8 12 UMC	15,0	436	3	4	³ / ₁₆
C 6325 / 8 12 UMC	15,0	436	2	4	³ / ₁₆
C 6328 / 8 12 UMC	15,0	436	2	4	³ / ₁₆
C 6338 / 8 12 UMC	15,0	436	3	4	³ / ₁₆

 Technical data valid for all countries except the U.S.A.

Size	P ₂ [kW]	[kg] ²⁹⁾	z ³⁰⁾	Guide rail	
				W [mm]	Y [mm]
C 4825 / 4 12 UMC	5,6	146	2	100	5
C 4825 / 8 12 UMC	11,2	198	2	100	5
C 4828 / 4 12 UMC	5,6	146	2	100	5
C 4828 / 8 12 UMC	11,2	198	2	100	5
C 5725 / 4 12 UMC	5,6	146	2	100	5

29) Incl. 30 ft [10 m] power cable and guide bracket

30) z = number of blades

Size	P ₂ [kW]	[kg] ²⁹⁾	z ³⁰⁾	Guide rail	
				W [mm]	Y [mm]
C 5725 / 8 12 UMC	11,2	198	2	100	5
C 5728 / 8 12 UMC	11,2	198	2	100	5
C 5731 / 8 12 UMC	11,2	198	3	100	5
C 5738 / 8 12 UMC	11,2	198	3	100	5
C 6325 / 8 12 UMC	11,2	198	2	100	5
C 6328 / 8 12 UMC	11,2	198	2	100	5
C 6338 / 8 12 UMC	11,2	198	3	100	5

i Dimensions ["] valid for the U.S.A.

Size	A	B	C	C1	ØD	Øda	Ød1
C 4825 / 4 12 UMC	39 ⁷ / ₁₆	32 ¹ / ₈	8 ⁷ / ₁₆	6 ⁷ / ₈	18 ⁷ / ₈	9 ⁷ / ₈	11 ¹⁵ / ₁₆
C 4825 / 8 12 UMC	44 ³ / ₁₆	36 ⁷ / ₈	8 ⁷ / ₁₆	6 ⁷ / ₈	18 ⁷ / ₈	9 ⁷ / ₈	11 ¹⁵ / ₁₆
C 4828 / 4 12 UMC	39 ⁷ / ₁₆	32 ¹ / ₈	8 ⁷ / ₁₆	6 ⁷ / ₈	18 ⁷ / ₈	9 ⁷ / ₈	11 ¹⁵ / ₁₆
C 4828 / 8 12 UMC	44 ³ / ₁₆	36 ⁷ / ₈	8 ⁷ / ₁₆	6 ⁷ / ₈	18 ⁷ / ₈	9 ⁷ / ₈	11 ¹⁵ / ₁₆
C 5725 / 4 12 UMC	39 ⁷ / ₁₆	32 ¹ / ₈	8 ⁷ / ₁₆	6 ⁷ / ₈	22 ⁷ / ₁₆	9 ⁷ / ₈	11 ¹⁵ / ₁₆
C 5725 / 8 12 UMC	44 ³ / ₁₆	36 ⁷ / ₈	8 ⁷ / ₁₆	6 ⁷ / ₈	22 ⁷ / ₁₆	9 ⁷ / ₈	11 ¹⁵ / ₁₆
C 5728 / 8 12 UMC	44 ³ / ₁₆	36 ⁷ / ₈	8 ⁷ / ₁₆	6 ⁷ / ₈	22 ⁷ / ₁₆	9 ⁷ / ₈	11 ¹⁵ / ₁₆
C 5731 / 8 12 UMC	44 ³ / ₁₆	36 ⁷ / ₈	8 ⁷ / ₁₆	6 ⁷ / ₈	22 ⁷ / ₁₆	9 ⁷ / ₈	11 ¹⁵ / ₁₆
C 5738 / 8 12 UMC	44 ³ / ₁₆	36 ⁷ / ₈	8 ⁷ / ₁₆	6 ⁷ / ₈	22 ⁷ / ₁₆	9 ⁷ / ₈	11 ¹⁵ / ₁₆
C 6325 / 8 12 UMC	44 ³ / ₁₆	36 ⁷ / ₈	8 ⁷ / ₁₆	6 ⁷ / ₈	24 ¹³ / ₁₆	9 ⁷ / ₈	11 ¹⁵ / ₁₆
C 6328 / 8 12 UMC	44 ³ / ₁₆	36 ⁷ / ₈	8 ⁷ / ₁₆	6 ⁷ / ₈	24 ¹³ / ₁₆	9 ⁷ / ₈	11 ¹⁵ / ₁₆
C 6338 / 8 12 UMC	44 ³ / ₁₆	36 ⁷ / ₈	8 ⁷ / ₁₆	6 ⁷ / ₈	24 ¹³ / ₁₆	9 ⁷ / ₈	11 ¹⁵ / ₁₆

i Dimensions ["] valid for the U.S.A.

Size	E	F	G	H	L	M	N	S	T
C 4825 / 4 12 UMC	1 ¹¹ / ₁₆	1 ³ / ₄	4 ³ / ₁₆	16 ⁹ / ₁₆	35 ¹³ / ₁₆	17 ¹¹ / ₁₆	50	14 ³ / ₁₆	10 ⁵ / ₈
C 4825 / 8 12 UMC	1 ¹¹ / ₁₆	1 ³ / ₄	4 ³ / ₁₆	16 ⁹ / ₁₆	40 ¹ / ₂	17 ¹¹ / ₁₆	54 ³ / ₄	16 ³ / ₄	13
C 4828 / 4 12 UMC	1 ¹¹ / ₁₆	1 ³ / ₄	4 ³ / ₁₆	16 ⁹ / ₁₆	35 ¹³ / ₁₆	17 ¹¹ / ₁₆	50	14 ³ / ₁₆	10 ⁵ / ₈
C 4828 / 8 12 UMC	1 ¹¹ / ₁₆	1 ³ / ₄	4 ³ / ₁₆	16 ⁹ / ₁₆	40 ¹ / ₂	17 ¹¹ / ₁₆	54 ³ / ₄	16 ³ / ₄	13
C 5725 / 4 12 UMC	1 ¹¹ / ₁₆	1 ³ / ₄	4 ³ / ₁₆	16 ⁹ / ₁₆	35 ¹³ / ₁₆	17 ¹¹ / ₁₆	50	14 ³ / ₁₆	10 ⁵ / ₈
C 5725 / 8 12 UMC	1 ¹¹ / ₁₆	1 ³ / ₄	4 ³ / ₁₆	16 ⁹ / ₁₆	40 ¹ / ₂	17 ¹¹ / ₁₆	54 ³ / ₄	16 ³ / ₄	13
C 5728 / 8 12 UMC	1 ¹¹ / ₁₆	1 ³ / ₄	4 ³ / ₁₆	16 ⁹ / ₁₆	40 ¹ / ₂	17 ¹¹ / ₁₆	54 ³ / ₄	16 ³ / ₄	13
C 5731 / 8 12 UMC	1 ¹¹ / ₁₆	1 ³ / ₄	4 ³ / ₁₆	16 ⁹ / ₁₆	40 ¹ / ₂	27 ⁹ / ₁₆	54 ³ / ₄	16 ³ / ₄	13
C 5738 / 8 12 UMC	1 ¹¹ / ₁₆	1 ³ / ₄	4 ³ / ₁₆	16 ⁹ / ₁₆	40 ¹ / ₂	27 ⁹ / ₁₆	54 ³ / ₄	16 ³ / ₄	13
C 6325 / 8 12 UMC	1 ¹¹ / ₁₆	1 ³ / ₄	4 ³ / ₁₆	16 ⁹ / ₁₆	40 ¹ / ₂	17 ¹¹ / ₁₆	54 ³ / ₄	16 ³ / ₄	13
C 6328 / 8 12 UMC	1 ¹¹ / ₁₆	1 ³ / ₄	4 ³ / ₁₆	16 ⁹ / ₁₆	40 ¹ / ₂	17 ¹¹ / ₁₆	54 ³ / ₄	16 ³ / ₄	13
C 6338 / 8 12 UMC	1 ¹¹ / ₁₆	1 ³ / ₄	4 ³ / ₁₆	16 ⁹ / ₁₆	40 ¹ / ₂	27 ⁹ / ₁₆	54 ³ / ₄	16 ³ / ₄	13


i Dimensions [mm] valid for all countries except the U.S.A.

Size	A	B	C	C1	ØD	Øda	Ød1
C 4825 / 4 12 UMC	1002	816	215	175	480	251	304
C 4825 / 8 12 UMC	1122	936	215	175	480	251	304
C 4828 / 4 12 UMC	1002	816	215	175	480	251	304
C 4828 / 8 12 UMC	1122	936	215	175	480	251	304
C 5725 / 4 12 UMC	1002	816	215	175	570	251	304
C 5725 / 8 12 UMC	1122	936	215	175	570	251	304
C 5728 / 8 12 UMC	1122	936	215	175	570	251	304
C 5731 / 8 12 UMC	1122	936	215	175	570	251	304
C 5738 / 8 12 UMC	1122	936	215	175	570	251	304
C 6325 / 8 12 UMC	1122	936	215	175	630	251	304
C 6328 / 8 12 UMC	1122	936	215	175	630	251	304
C 6338 / 8 12 UMC	1122	936	215	175	630	251	304

 Dimensions [mm] valid for all countries except the U.S.A.

Size	E	F	G	H	L	M	N	S	T
C 4825 / 4 12 UMC	43	44	106	420	909	450	1270	360	270
C 4825 / 8 12 UMC	43	44	106	420	1029	450	1390	425	330
C 4828 / 4 12 UMC	43	44	106	420	909	450	1270	360	270
C 4828 / 8 12 UMC	43	44	106	420	1029	450	1390	425	330
C 5725 / 4 12 UMC	43	44	106	420	909	450	1270	360	270
C 5725 / 8 12 UMC	43	44	106	420	1029	450	1390	425	330
C 5728 / 8 12 UMC	43	44	106	420	1029	450	1390	425	330
C 5731 / 8 12 UMC	43	44	106	420	1029	700	1390	425	330
C 5738 / 8 12 UMC	43	44	106	420	1029	700	1390	425	330
C 6325 / 8 12 UMC	43	44	106	420	1029	450	1390	425	330
C 6328 / 8 12 UMC	43	44	106	420	1029	450	1390	425	330
C 6338 / 8 12 UMC	43	44	106	420	1029	700	1390	425	330

Amamix 300, 60 Hz, n = 1160 rpm, motor housing material gray cast iron - version with jet ring

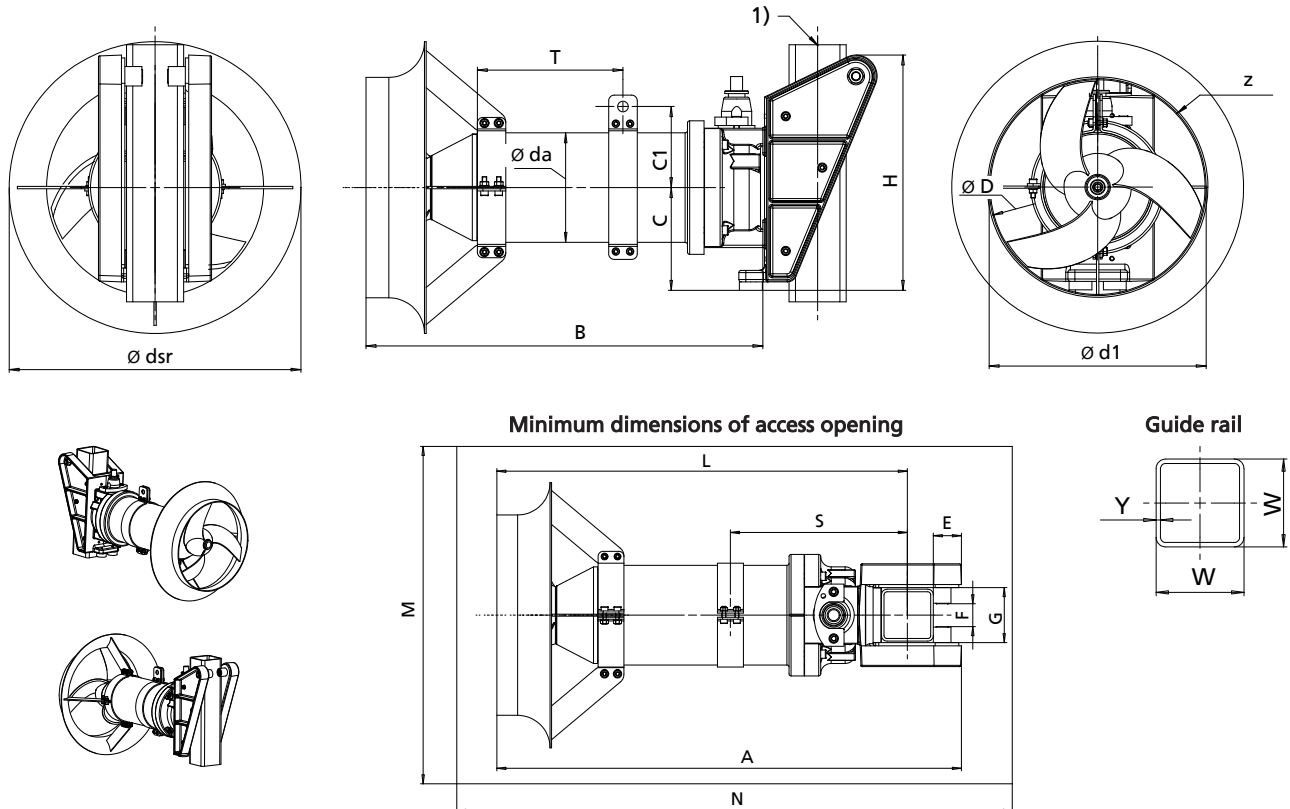

1) = guide rail

 Technical data valid for the U.S.A.

Size	P ₂ [hp]	[lbs] ³¹⁾	z ³²⁾	Guide rail	
				W ["]	Y ["]
C 2925 R / 0 6 UDG / XDG	2,8	128	2	2	1/8
C 2925 R / 2 6 UDG / XDG	4,7	128	2	2	1/8
C 2928 R / 0 6 UDG / XDG	2,8	128	2	2	1/8
C 2928 R / 2 6 UDG / XDG	4,7	128	2	2	1/8
C 2931 R / 2 6 UDG / XDG	4,7	128	3	2	1/8
C 2936 R / 0 6 UDG / XDG	2,8	128	3	2	1/8
C 2936 R / 2 6 UDG / XDG	4,7	128	3	2	1/8
C 2938 R / 2 6 UDG / XDG	4,7	128	3	2	1/8

 Technical data valid for all countries except the U.S.A.

Size	P ₂ [kW]	[kg] ³¹⁾	z ³²⁾	Guide rail	
				W [mm]	Y [mm]
C 2925 R / 0 6 UDG / XDG	2,1	58,2	2	60	3
C 2925 R / 2 6 UDG / XDG	3,5	58,2	2	60	3
C 2928 R / 0 6 UDG / XDG	2,1	58,2	2	60	3
C 2928 R / 2 6 UDG / XDG	3,5	58,2	2	60	3
C 2931 R / 2 6 UDG / XDG	3,5	58,2	3	60	3
C 2936 R / 0 6 UDG / XDG	2,1	58,2	3	60	3
C 2936 R / 2 6 UDG / XDG	3,5	58,2	3	60	3
C 2938 R / 2 6 UDG / XDG	3,5	58,2	3	60	3

31) Incl. 30 ft [10 m] power cable and guide bracket

32) z = number of blades

i Dimensions ["] valid for the U.S.A.

Size	A	B	C	C1	ØD	Øda	Ød1	Ødsr
C 2925 R / 0 6 UDG / XDG	28 ¹⁵ / ₁₆	23 ⁹ / ₁₆	5 ⁷ / ₈	4 ⁷ / ₈	11 ⁹ / ₁₆	6 ¹ / ₈	11 ¹³ / ₁₆	15 ³ / ₄
C 2925 R / 2 6 UDG / XDG	28 ¹⁵ / ₁₆	23 ⁹ / ₁₆	5 ⁷ / ₈	4 ⁷ / ₈	11 ⁹ / ₁₆	6 ¹ / ₈	11 ¹³ / ₁₆	15 ³ / ₄
C 2928 R / 0 6 UDG / XDG	28 ¹⁵ / ₁₆	23 ⁹ / ₁₆	5 ⁷ / ₈	4 ⁷ / ₈	11 ⁹ / ₁₆	6 ¹ / ₈	11 ¹³ / ₁₆	15 ³ / ₄
C 2928 R / 2 6 UDG / XDG	28 ¹⁵ / ₁₆	23 ⁹ / ₁₆	5 ⁷ / ₈	4 ⁷ / ₈	11 ⁹ / ₁₆	6 ¹ / ₈	11 ¹³ / ₁₆	15 ³ / ₄
C 2931 R / 2 6 UDG / XDG	28 ¹⁵ / ₁₆	23 ⁹ / ₁₆	5 ⁷ / ₈	4 ⁷ / ₈	11 ⁹ / ₁₆	6 ¹ / ₈	11 ¹³ / ₁₆	15 ³ / ₄
C 2936 R / 0 6 UDG / XDG	28 ¹⁵ / ₁₆	23 ⁹ / ₁₆	5 ⁷ / ₈	4 ⁷ / ₈	11 ⁹ / ₁₆	6 ¹ / ₈	11 ¹³ / ₁₆	15 ³ / ₄
C 2936 R / 2 6 UDG / XDG	28 ¹⁵ / ₁₆	23 ⁹ / ₁₆	5 ⁷ / ₈	4 ⁷ / ₈	11 ⁹ / ₁₆	6 ¹ / ₈	11 ¹³ / ₁₆	15 ³ / ₄
C 2938 R / 2 6 UDG / XDG	28 ¹⁵ / ₁₆	23 ⁹ / ₁₆	5 ⁷ / ₈	4 ⁷ / ₈	11 ⁹ / ₁₆	6 ¹ / ₈	11 ¹³ / ₁₆	15 ³ / ₄

i Dimensions ["] valid for the U.S.A.

Size	E	F	G	H	L	M	N	S	T
C 2925 R / 0 6 UDG / XDG	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	26 ¹ / ₈	19 ¹¹ / ₁₆	37 ³ / ₁₆	10 ¹⁵ / ₁₆	8 ¹¹ / ₁₆
C 2925 R / 2 6 UDG / XDG	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	26 ¹ / ₈	19 ¹¹ / ₁₆	37 ³ / ₁₆	10 ¹⁵ / ₁₆	8 ¹¹ / ₁₆
C 2928 R / 0 6 UDG / XDG	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	26 ¹ / ₈	19 ¹¹ / ₁₆	37 ³ / ₁₆	10 ¹⁵ / ₁₆	8 ¹¹ / ₁₆
C 2928 R / 2 6 UDG / XDG	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	26 ¹ / ₈	19 ¹¹ / ₁₆	37 ³ / ₁₆	10 ¹⁵ / ₁₆	8 ¹¹ / ₁₆
C 2931 R / 2 6 UDG / XDG	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	26 ¹ / ₈	19 ¹¹ / ₁₆	37 ³ / ₁₆	10 ¹⁵ / ₁₆	8 ¹¹ / ₁₆
C 2936 R / 0 6 UDG / XDG	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	26 ¹ / ₈	19 ¹¹ / ₁₆	37 ³ / ₁₆	10 ¹⁵ / ₁₆	8 ¹¹ / ₁₆
C 2936 R / 2 6 UDG / XDG	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	26 ¹ / ₈	19 ¹¹ / ₁₆	37 ³ / ₁₆	10 ¹⁵ / ₁₆	8 ¹¹ / ₁₆
C 2938 R / 2 6 UDG / XDG	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	26 ¹ / ₈	19 ¹¹ / ₁₆	37 ³ / ₁₆	10 ¹⁵ / ₁₆	8 ¹¹ / ₁₆


i Dimensions [mm] valid for all countries except the U.S.A.

Size	A	B	C	C1	ØD	Øda	Ød1	Ødsr
C 2925 R / 0 6 UDG / XDG	735	598	150	124	294	156	300	400
C 2925 R / 2 6 UDG / XDG	735	598	150	124	294	156	300	400
C 2928 R / 0 6 UDG / XDG	735	598	150	124	294	156	300	400
C 2928 R / 2 6 UDG / XDG	735	598	150	124	294	156	300	400
C 2931 R / 2 6 UDG / XDG	735	598	150	124	294	156	300	400
C 2936 R / 0 6 UDG / XDG	735	598	150	124	294	156	300	400
C 2936 R / 2 6 UDG / XDG	735	598	150	124	294	156	300	400
C 2938 R / 2 6 UDG / XDG	735	598	150	124	294	156	300	400

i Dimensions [mm] valid for all countries except the U.S.A.

Size	E	F	G	H	L	M	N	S	T
C 2925 R / 0 6 UDG / XDG	42	36	66	287	663	500	945	278	220
C 2925 R / 2 6 UDG / XDG	42	36	66	287	663	500	945	278	220
C 2928 R / 0 6 UDG / XDG	42	36	66	287	663	500	945	278	220
C 2928 R / 2 6 UDG / XDG	42	36	66	287	663	500	945	278	220
C 2931 R / 2 6 UDG / XDG	42	36	66	287	663	500	945	278	220
C 2936 R / 0 6 UDG / XDG	42	36	66	287	663	500	945	278	220
C 2936 R / 2 6 UDG / XDG	42	36	66	287	663	500	945	278	220
C 2938 R / 2 6 UDG / XDG	42	36	66	287	663	500	945	278	220

Amamix 300, 60 Hz, n = 1160 rpm, motor housing material stainless steel - version with jet ring

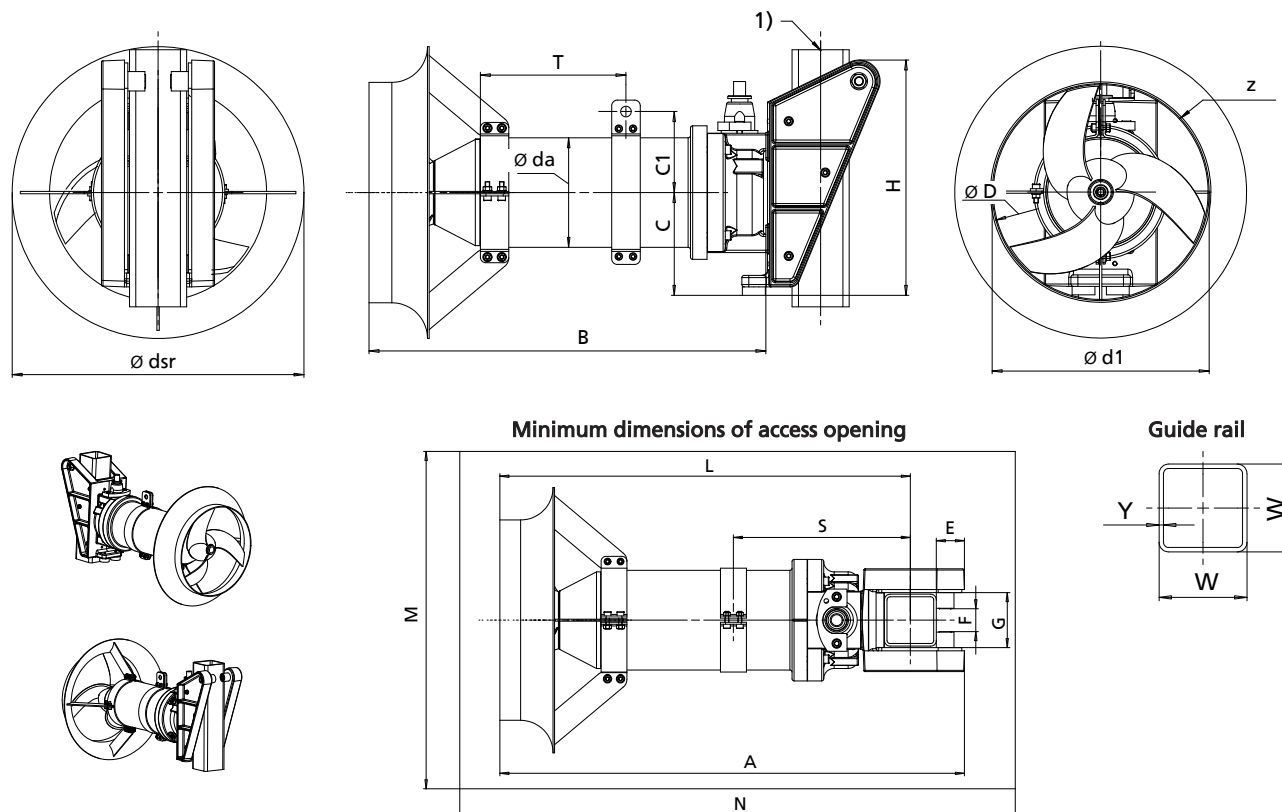

1) = guide rail

Technical data valid for the U.S.A.

Size	P ₂ [hp]	[lbs] ³³⁾	z ³⁴⁾	Guide rail	
				W ["]	Y ["]
C 2925 R / 0 6 UDC / XDC	2,8	114	2	2	1/8
C 2925 R / 2 6 UDC / XDC	4,7	114	2	2	1/8
C 2928 R / 0 6 UDC / XDC	2,8	114	2	2	1/8
C 2928 R / 2 6 UDC / XDC	4,7	114	2	2	1/8
C 2931 R / 2 6 UDC / XDC	4,7	114	3	2	1/8
C 2936 R / 0 6 UDC / XDC	2,8	114	3	2	1/8
C 2936 R / 2 6 UDC / XDC	4,7	114	3	2	1/8
C 2938 R / 2 6 UDC / XDC	4,7	114	3	2	1/8

Technical data valid for all countries except the U.S.A.

Size	P ₂ [kW]	[kg] ³⁵⁾	z ³⁶⁾	Guide rail	
				W [mm]	Y [mm]
C 2925 R / 0 6 UDC / XDC	2,1	51,7	2	60	3
C 2925 R / 2 6 UDC / XDC	3,5	51,7	2	60	3
C 2928 R / 0 6 UDC / XDC	2,1	51,7	2	60	3
C 2928 R / 2 6 UDC / XDC	3,5	51,7	2	60	3
C 2931 R / 2 6 UDC / XDC	3,5	51,7	3	60	3
C 2936 R / 0 6 UDC / XDC	2,1	51,7	3	60	3
C 2936 R / 2 6 UDC / XDC	3,5	51,7	3	60	3
C 2938 R / 2 6 UDC / XDC	3,5	51,7	3	60	3

³³⁾ Incl. 30 ft [10 m] power cable and guide bracket

³⁴⁾ z = number of blades

³⁵⁾ Incl. 30 ft [10 m] power cable and guide bracket

³⁶⁾ z = number of blades

i Dimensions ["] valid for the U.S.A.

Size	A	B	C	C1	ØD	Øda	Ød1	Ødsr
C 2925 R / 0 6 UDC / XDC	28 ³ / ₄	23 ⁹ / ₁₆	5 ⁷ / ₈	4 ³ / ₄	11 ⁹ / ₁₆	5 ¹³ / ₁₆	11 ¹³ / ₁₆	15 ³ / ₄
C 2925 R / 2 6 UDC / XDC	28 ³ / ₄	23 ⁹ / ₁₆	5 ⁷ / ₈	4 ³ / ₄	11 ⁹ / ₁₆	5 ¹³ / ₁₆	11 ¹³ / ₁₆	15 ³ / ₄
C 2928 R / 0 6 UDC / XDC	28 ³ / ₄	23 ⁹ / ₁₆	5 ⁷ / ₈	4 ³ / ₄	11 ⁹ / ₁₆	5 ¹³ / ₁₆	11 ¹³ / ₁₆	15 ³ / ₄
C 2928 R / 2 6 UDC / XDC	28 ³ / ₄	23 ⁹ / ₁₆	5 ⁷ / ₈	4 ³ / ₄	11 ⁹ / ₁₆	5 ¹³ / ₁₆	11 ¹³ / ₁₆	15 ³ / ₄
C 2931 R / 2 6 UDC / XDC	28 ³ / ₄	23 ⁹ / ₁₆	5 ⁷ / ₈	4 ³ / ₄	11 ⁹ / ₁₆	5 ¹³ / ₁₆	11 ¹³ / ₁₆	15 ³ / ₄
C 2936 R / 0 6 UDC / XDC	28 ³ / ₄	23 ⁹ / ₁₆	5 ⁷ / ₈	4 ³ / ₄	11 ⁹ / ₁₆	5 ¹³ / ₁₆	11 ¹³ / ₁₆	15 ³ / ₄
C 2936 R / 2 6 UDC / XDC	28 ³ / ₄	23 ⁹ / ₁₆	5 ⁷ / ₈	4 ³ / ₄	11 ⁹ / ₁₆	5 ¹³ / ₁₆	11 ¹³ / ₁₆	15 ³ / ₄
C 2938 R / 2 6 UDC / XDC	28 ³ / ₄	23 ⁹ / ₁₆	5 ⁷ / ₈	4 ³ / ₄	11 ⁹ / ₁₆	5 ¹³ / ₁₆	11 ¹³ / ₁₆	15 ³ / ₄

i Dimensions ["] valid for the U.S.A.

Size	E	F	G	H	L	M	N	S	T
C 2925 R / 0 6 UDC / XDC	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	25 ¹⁵ / ₁₆	19 ¹¹ / ₁₆	37 ³ / ₁₆	10 ¹³ / ₁₆	8 ¹¹ / ₁₆
C 2925 R / 2 6 UDC / XDC	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	25 ¹⁵ / ₁₆	19 ¹¹ / ₁₆	37 ³ / ₁₆	10 ¹³ / ₁₆	8 ¹¹ / ₁₆
C 2928 R / 0 6 UDC / XDC	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	25 ¹⁵ / ₁₆	19 ¹¹ / ₁₆	37 ³ / ₁₆	10 ¹³ / ₁₆	8 ¹¹ / ₁₆
C 2928 R / 2 6 UDC / XDC	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	25 ¹⁵ / ₁₆	19 ¹¹ / ₁₆	37 ³ / ₁₆	10 ¹³ / ₁₆	8 ¹¹ / ₁₆
C 2931 R / 2 6 UDC / XDC	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	25 ¹⁵ / ₁₆	19 ¹¹ / ₁₆	37 ³ / ₁₆	10 ¹³ / ₁₆	8 ¹¹ / ₁₆
C 2936 R / 0 6 UDC / XDC	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	25 ¹⁵ / ₁₆	19 ¹¹ / ₁₆	37 ³ / ₁₆	10 ¹³ / ₁₆	8 ¹¹ / ₁₆
C 2936 R / 2 6 UDC / XDC	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	25 ¹⁵ / ₁₆	19 ¹¹ / ₁₆	37 ³ / ₁₆	10 ¹³ / ₁₆	8 ¹¹ / ₁₆
C 2938 R / 2 6 UDC / XDC	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	25 ¹⁵ / ₁₆	19 ¹¹ / ₁₆	37 ³ / ₁₆	10 ¹³ / ₁₆	8 ¹¹ / ₁₆


i Dimensions [mm] valid for all countries except the U.S.A.

Size	A	B	C	C1	ØD	Øda	Ød1	Ødsr
C 2925 R / 0 6 UDC / XDC	731	598	150	120	294	148	300	400
C 2925 R / 2 6 UDC / XDC	731	598	150	120	294	148	300	400
C 2928 R / 0 6 UDC / XDC	731	598	150	120	294	148	300	400
C 2928 R / 2 6 UDC / XDC	731	598	150	120	294	148	300	400
C 2931R / 2 6 UDC / XDC	731	598	150	120	294	148	300	400
C 2936 R / 0 6 UDC / XDC	731	598	150	120	294	148	300	400
C 2936 R / 2 6 UDC / XDC	731	598	150	120	294	148	300	400
C 2938 R / 2 6 UDC / XDC	731	598	150	120	294	148	300	400

i Dimensions [mm] valid for all countries except the U.S.A.

Size	E	F	G	H	L	M	N	S	T
C 2925 R / 0 6 UDC / XDC	42	36	66	287	659	500	945	274	220
C 2925 R / 2 6 UDC / XDC	42	36	66	287	659	500	945	274	220
C 2928 R / 0 6 UDC / XDC	42	36	66	287	659	500	945	274	220
C 2928 R / 2 6 UDC / XDC	42	36	66	287	659	500	945	274	220
C 2931R / 2 6 UDC / XDC	42	36	66	287	659	500	945	274	220
C 2936 R / 0 6 UDC / XDC	42	36	66	287	659	500	945	274	220
C 2936 R / 2 6 UDC / XDC	42	36	66	287	659	500	945	274	220
C 2938 R / 2 6 UDC / XDC	42	36	66	287	659	500	945	274	220

Amamix 400, 60 Hz, n = 875 rpm, motor housing material gray cast iron - version with jet ring

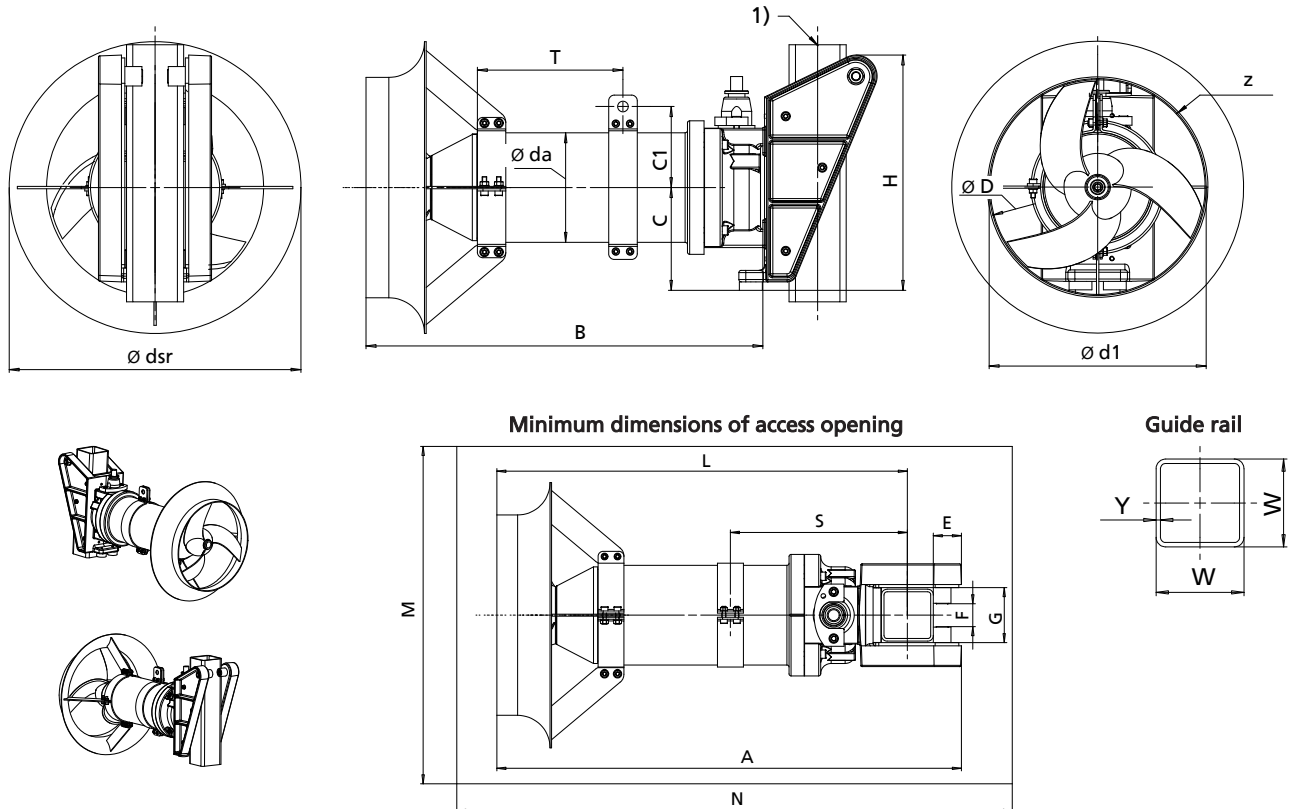

1) = guide rail

Technical data valid for the U.S.A.

Size	P ₂ [hp]	[lbs] ³⁷⁾	z ³⁸⁾	Guide rail	
				W ["]	Y ["]
C 3725 R / 3 8 UDG / XDG	4,0	198	2	2	1 1/8
C 3725 R / 4 8 UDG / XDG	6,0	198	2	2	1 1/8
C 3728 R / 3 8 UDG / XDG	4,0	198	2	2	1 1/8
C 3728 R / 4 8 UDG / XDG	6,0	198	2	2	1 1/8
C 3731 R / 4 8 UDG / XDG	6,0	215	3	4	3/16
C 3735 R / 4 8 UDG / XDG	6,0	215	3	4	3/16
C 3738 R / 3 8 UDG / XDG	4,0	198	3	2	1 1/8
C 3738 R / 4 8 UDG / XDG	6,0	215	3	4	3/16

Technical data valid for all countries except the U.S.A.

Size	P ₂ [kW]	[kg] ³⁷⁾	z ³⁸⁾	Guide rail	
				W [mm]	Y [mm]
C 3725 R / 3 8 UDG / XDG	3,0	89,8	2	60	3
C 3725 R / 4 8 UDG / XDG	4,5	89,8	2	60	3
C 3728 R / 3 8 UDG / XDG	3,0	89,8	2	60	3
C 3728 R / 4 8 UDG / XDG	4,5	89,8	2	60	3
C 3731 R / 4 8 UDG / XDG	4,5	97,8	3	100	5
C 3735 R / 4 8 UDG / XDG	4,5	97,8	3	100	5
C 3738 R / 3 8 UDG / XDG	3,0	89,8	3	60	3
C 3738 R / 4 8 UDG / XDG	4,5	97,8	3	100	5

³⁷⁾ Incl. 30 ft [10 m] power cable and guide bracket

³⁸⁾ z = number of blades

i Dimensions ["] valid for the U.S.A.

Size	A	B	C	C1	ØD	Øda	Ød1	Ødsr
C 3725 R / 3 8 UDG / XDG	33 ¹¹ / ₁₆	27 ³ / ₈	5 ⁷ / ₈	5 ⁹ / ₁₆	14 ¹¹ / ₁₆	7 ⁹ / ₁₆	14 ¹⁵ / ₁₆	20 ¹ / ₈
C 3725 R / 4 8 UDG / XDG	33 ¹¹ / ₁₆	27 ³ / ₈	5 ⁷ / ₈	5 ⁹ / ₁₆	14 ¹¹ / ₁₆	7 ⁹ / ₁₆	14 ¹⁵ / ₁₆	20 ¹ / ₈
C 3728 R / 3 8 UDG / XDG	33 ¹¹ / ₁₆	27 ³ / ₈	5 ⁷ / ₈	5 ⁹ / ₁₆	14 ¹¹ / ₁₆	7 ⁹ / ₁₆	14 ¹⁵ / ₁₆	20 ¹ / ₈
C 3728 R / 4 8 UDG / XDG	33 ¹¹ / ₁₆	27 ³ / ₈	5 ⁷ / ₈	5 ⁹ / ₁₆	14 ¹¹ / ₁₆	7 ⁹ / ₁₆	14 ¹⁵ / ₁₆	20 ¹ / ₈
C 3731 R / 4 8 UDG / XDG	33 ¹³ / ₁₆	27 ³ / ₈	7 ¹ / ₁₆	5 ⁹ / ₁₆	14 ¹¹ / ₁₆	7 ⁹ / ₁₆	14 ¹⁵ / ₁₆	20 ¹ / ₈
C 3735 R / 4 8 UDG / XDG	33 ¹³ / ₁₆	27 ³ / ₈	7 ¹ / ₁₆	5 ⁹ / ₁₆	14 ¹¹ / ₁₆	7 ⁹ / ₁₆	14 ¹⁵ / ₁₆	20 ¹ / ₈
C 3738 R / 3 8 UDG / XDG	33 ¹¹ / ₁₆	27 ³ / ₈	5 ⁷ / ₈	5 ⁹ / ₁₆	14 ¹¹ / ₁₆	7 ⁹ / ₁₆	14 ¹⁵ / ₁₆	20 ¹ / ₈
C 3738 R / 4 8 UDG / XDG	33 ¹³ / ₁₆	27 ³ / ₈	7 ¹ / ₁₆	5 ⁹ / ₁₆	14 ¹¹ / ₁₆	7 ⁹ / ₁₆	14 ¹⁵ / ₁₆	20 ¹ / ₈

i Dimensions ["] valid for the U.S.A.

Size	E	F	G	H	L	M	N	S	T
C 3725 R / 3 8 UDG / XDG	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	30 ¹³ / ₁₆	24	41 ⁵ / ₁₆	13 ⁷ / ₁₆	10 ¹ / ₁₆
C 3725 R / 4 8 UDG / XDG	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	30 ¹³ / ₁₆	24	41 ⁵ / ₁₆	13 ⁷ / ₁₆	10 ¹ / ₁₆
C 3728 R / 3 8 UDG / XDG	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	30 ¹³ / ₁₆	24	41 ⁵ / ₁₆	13 ⁷ / ₁₆	10 ¹ / ₁₆
C 3728 R / 4 8 UDG / XDG	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	30 ¹³ / ₁₆	24	41 ⁵ / ₁₆	13 ⁷ / ₁₆	10 ¹ / ₁₆
C 3731 R / 4 8 UDG / XDG	1 ¹¹ / ₁₆	1 ³ / ₄	4 ³ / ₁₆	16 ¹ / ₄	31 ¹ / ₈	24	45 ¹ / ₄	13 ⁷ / ₁₆	10 ¹ / ₁₆
C 3735 R / 4 8 UDG / XDG	1 ¹¹ / ₁₆	1 ³ / ₄	4 ³ / ₁₆	16 ¹ / ₄	31 ¹ / ₈	24	45 ¹ / ₄	13 ⁷ / ₁₆	10 ¹ / ₁₆
C 3738 R / 3 8 UDG / XDG	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	30 ¹³ / ₁₆	24	41 ⁵ / ₁₆	13 ⁷ / ₁₆	10 ¹ / ₁₆
C 3738 R / 4 8 UDG / XDG	1 ¹¹ / ₁₆	1 ³ / ₄	4 ³ / ₁₆	16 ¹ / ₄	31 ¹ / ₈	24	45 ¹ / ₄	13 ⁷ / ₁₆	10 ¹ / ₁₆


i Dimensions [mm] valid for all countries except the U.S.A.

Size	A	B	C	C1	ØD	Øda	Ød1	Ødsr
C 3725 R / 3 8 UDG / XDG	855	695	150	142	373	192	380	511
C 3725 R / 4 8 UDG / XDG	855	695	150	142	373	192	380	511
C 3728 R / 3 8 UDG / XDG	855	695	150	142	373	192	380	511
C 3728 R / 4 8 UDG / XDG	855	695	150	142	373	192	380	511
C 3731 R / 4 8 UDG / XDG	884	695	180	142	373	192	380	511
C 3735 R / 4 8 UDG / XDG	884	695	180	142	373	192	380	511
C 3738 R / 3 8 UDG / XDG	855	695	150	142	373	192	380	511
C 3738 R / 4 8 UDG / XDG	884	695	180	142	373	192	380	511

i Dimensions [mm] valid for all countries except the U.S.A.

Size	E	F	G	H	L	M	N	S	T
C 3725 R / 3 8 UDG / XDG	42	36	66	287	783	610	1050	341	255
C 3725 R / 4 8 UDG / XDG	42	36	66	287	783	610	1050	341	255
C 3728 R / 3 8 UDG / XDG	42	36	66	287	783	610	1050	341	255
C 3728 R / 4 8 UDG / XDG	42	36	66	287	783	610	1050	341	255
C 3731 R / 4 8 UDG / XDG	43	44	106	412	791	610	1150	341	255
C 3735 R / 4 8 UDG / XDG	43	44	106	412	791	610	1150	341	255
C 3738 R / 3 8 UDG / XDG	42	36	66	287	783	610	1050	341	255
C 3738 R / 4 8 UDG / XDG	43	44	106	412	791	610	1150	341	255

Amamix 400, 60 Hz, n = 875 rpm, motor housing material stainless steel - version with jet ring

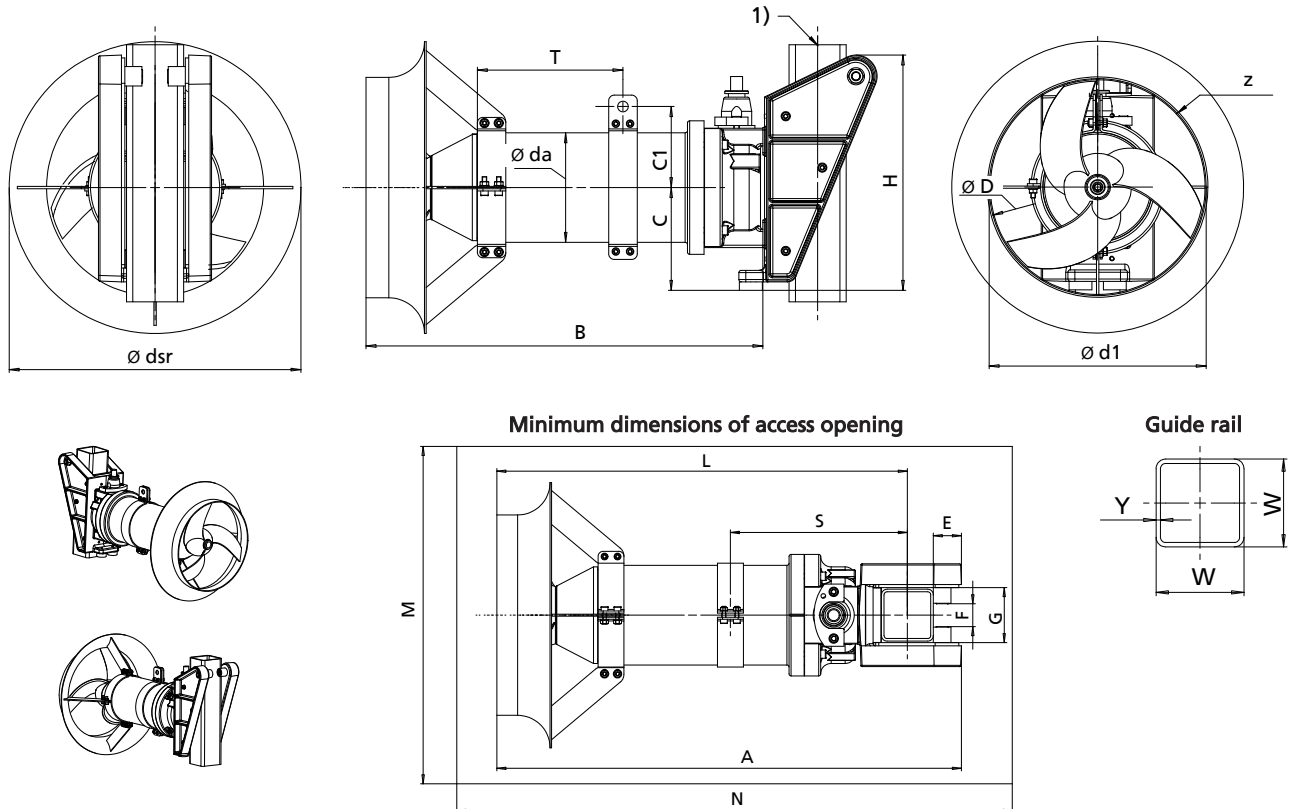

1) = guide rail

Technical data valid for the U.S.A.

Size	P ₂ [hp]	[lbs] ³⁹⁾	z ⁴⁰⁾	Guide rail	
				W ["]	Y ["]
C 3725 R / 3 8 UDC / XDC	4,0	196	2	2	1/8
C 3725 R / 4 8 UDC / XDC	6,0	196	2	2	1/8
C 3728 R / 3 8 UDC / XDC	4,0	196	2	2	1/8
C 3728 R / 4 8 UDC / XDC	6,0	196	2	2	1/8
C 3731 R / 4 8 UDC / XDC	6,0	200	3	4	3/16
C 3735 R / 4 8 UDC / XDC	6,0	200	3	4	3/16
C 3738 R / 3 8 UDC / XDC	4,0	196	3	2	1/8
C 3738 R / 4 8 UDC / XDC	6,0	200	3	4	3/16

Technical data valid for all countries except the U.S.A.

Size	P ₂ [kW]	[kg] ³⁹⁾	z ⁴⁰⁾	Guide rail	
				W [mm]	Y [mm]
C 3725 R / 3 8 UDC / XDC	3,0	89,3	2	60	3
C 3725 R / 4 8 UDC / XDC	4,5	89,3	2	60	3
C 3728 R / 3 8 UDC / XDC	3,0	89,3	2	60	3
C 3728 R / 4 8 UDC / XDC	4,5	89,3	2	60	3
C 3731 R / 4 8 UDC / XDC	4,5	90,8	3	100	5
C 3735 R / 4 8 UDC / XDC	4,5	90,8	3	100	5
C 3738 R / 3 8 UDC / XDC	3,0	89,3	3	60	3
C 3738 R / 4 8 UDC / XDC	4,5	90,8	3	100	5

³⁹⁾ Incl. 30 ft [10 m] power cable and guide bracket

⁴⁰⁾ z = number of blades

i Dimensions ["] valid for the U.S.A.

Size	A	B	C	C1	ØD	Øda	Ød1	Ødsr
C 3725 R / 3 8 UDC / XDC	38 ¹¹ / ₁₆	27 ³ / ₈	5 ⁷ / ₈	5 ¹ / ₂	14 ¹¹ / ₁₆	6 ¹⁵ / ₁₆	14 ¹⁵ / ₁₆	20 ¹ / ₈
C 3725 R / 4 8 UDC / XDC	38 ¹¹ / ₁₆	27 ³ / ₈	5 ⁷ / ₈	5 ¹ / ₂	14 ¹¹ / ₁₆	6 ¹⁵ / ₁₆	14 ¹⁵ / ₁₆	20 ¹ / ₈
C 3728 R / 3 8 UDC / XDC	38 ¹¹ / ₁₆	27 ³ / ₈	5 ⁷ / ₈	5 ¹ / ₂	14 ¹¹ / ₁₆	6 ¹⁵ / ₁₆	14 ¹⁵ / ₁₆	20 ¹ / ₈
C 3728 R / 4 8 UDC / XDC	38 ¹¹ / ₁₆	27 ³ / ₈	5 ⁷ / ₈	5 ¹ / ₂	14 ¹¹ / ₁₆	6 ¹⁵ / ₁₆	14 ¹⁵ / ₁₆	20 ¹ / ₈
C 3731 R / 4 8 UDC / XDC	34 ¹¹ / ₁₆	27 ³ / ₈	7 ¹ / ₁₆	5 ¹ / ₂	14 ¹¹ / ₁₆	6 ¹⁵ / ₁₆	14 ¹⁵ / ₁₆	20 ¹ / ₈
C 3735 R / 4 8 UDC / XDC	34 ¹¹ / ₁₆	27 ³ / ₈	7 ¹ / ₁₆	5 ¹ / ₂	14 ¹¹ / ₁₆	6 ¹⁵ / ₁₆	14 ¹⁵ / ₁₆	20 ¹ / ₈
C 3738 R / 3 8 UDC / XDC	38 ¹¹ / ₁₆	27 ³ / ₈	5 ⁷ / ₈	5 ¹ / ₂	14 ¹¹ / ₁₆	6 ¹⁵ / ₁₆	14 ¹⁵ / ₁₆	20 ¹ / ₈
C 3738 R / 4 8 UDC / XDC	34 ¹¹ / ₁₆	27 ³ / ₈	7 ¹ / ₁₆	5 ¹ / ₂	14 ¹¹ / ₁₆	6 ¹⁵ / ₁₆	14 ¹⁵ / ₁₆	20 ¹ / ₈

i Dimensions ["] valid for the U.S.A.

Size	E	F	G	H	L	M	N	S	T
C 3725 R / 3 8 UDC / XDC	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	30 ¹³ / ₁₆	24	41 ⁵ / ₁₆	13 ⁵ / ₁₆	10 ¹ / ₁₆
C 3725 R / 4 8 UDC / XDC	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	30 ¹³ / ₁₆	24	41 ⁵ / ₁₆	13 ⁵ / ₁₆	10 ¹ / ₁₆
C 3728 R / 3 8 UDC / XDC	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	30 ¹³ / ₁₆	24	41 ⁵ / ₁₆	13 ⁵ / ₁₆	10 ¹ / ₁₆
C 3728 R / 4 8 UDC / XDC	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	30 ¹³ / ₁₆	24	41 ⁵ / ₁₆	13 ⁵ / ₁₆	10 ¹ / ₁₆
C 3731 R / 4 8 UDC / XDC	1 ¹¹ / ₁₆	1 ³ / ₄	4 ³ / ₁₆	16 ⁹ / ₁₆	31	24	45 ¹ / ₄	13 ⁵ / ₁₆	10 ¹ / ₁₆
C 3735 R / 4 8 UDC / XDC	1 ¹¹ / ₁₆	1 ³ / ₄	4 ³ / ₁₆	16 ⁹ / ₁₆	31	24	45 ¹ / ₄	13 ⁵ / ₁₆	10 ¹ / ₁₆
C 3738 R / 3 8 UDC / XDC	1 ⁵ / ₈	1 ⁷ / ₁₆	2 ⁵ / ₈	11 ⁵ / ₁₆	30 ¹³ / ₁₆	24	41 ⁵ / ₁₆	13 ⁵ / ₁₆	10 ¹ / ₁₆
C 3738 R / 4 8 UDC / XDC	1 ¹¹ / ₁₆	1 ³ / ₄	4 ³ / ₁₆	16 ⁹ / ₁₆	31	24	45 ¹ / ₄	13 ⁵ / ₁₆	10 ¹ / ₁₆


i Dimensions [mm] valid for all countries except the U.S.A.

Size	A	B	C	C1	ØD	Øda	Ød1	Ødsr
C 3725 R / 3 8 UDC / XDC	855	695	150	139	373	176	380	511
C 3725 R / 4 8 UDC / XDC	855	695	150	139	373	176	380	511
C 3728 R / 3 8 UDC / XDC	855	695	150	139	373	176	380	511
C 3728 R / 4 8 UDC / XDC	855	695	150	139	373	176	380	511
C 3731 R / 4 8 UDC / XDC	881	695	180	139	373	176	380	511
C 3735 R / 4 8 UDC / XDC	881	695	180	139	373	176	380	511
C 3738 R / 3 8 UDC / XDC	855	695	150	139	373	176	380	511
C 3738 R / 4 8 UDC / XDC	881	695	180	139	373	176	380	511

i Dimensions [mm] valid for all countries except the U.S.A.

Size	E	F	G	H	L	M	N	S	T
C 3725 R / 3 8 UDC / XDC	42	36	66	287	783	610	1050	338	255
C 3725 R / 4 8 UDC / XDC	42	36	66	287	783	610	1050	338	255
C 3728 R / 3 8 UDC / XDC	42	36	66	287	783	610	1050	338	255
C 3728 R / 4 8 UDC / XDC	42	36	66	287	783	610	1050	338	255
C 3731 R / 4 8 UDC / XDC	43	44	106	420	788	610	1150	338	255
C 3735 R / 4 8 UDC / XDC	43	44	106	420	788	610	1150	338	255
C 3738 R / 3 8 UDC / XDC	42	36	66	287	783	610	1050	338	255
C 3738 R / 4 8 UDC / XDC	43	44	106	420	788	610	1150	338	255

Amamix 600, 60 Hz, n = 585 rpm, motor housing material gray cast iron - version with jet ring

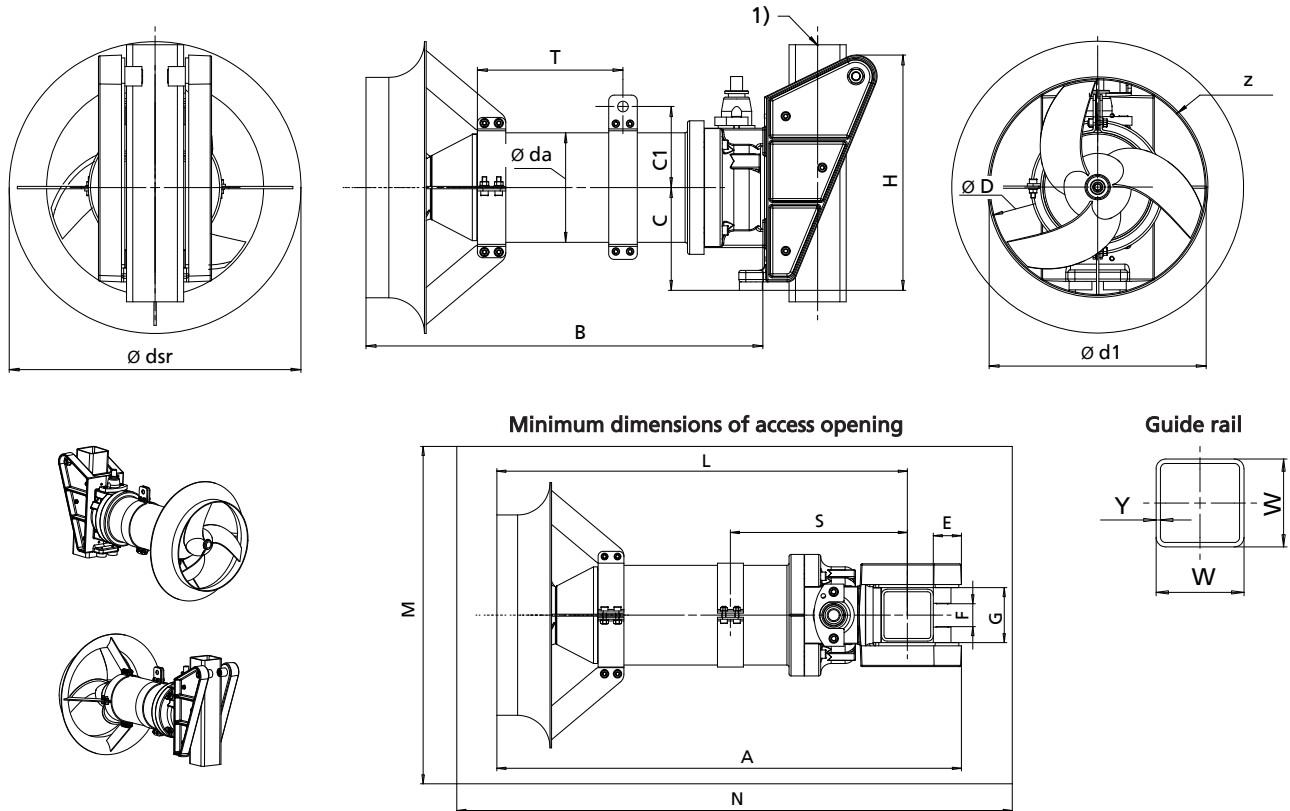

1) = guide rail

Technical data valid for the U.S.A.

Size	P ₂ [hp]	[lbs] ⁴¹⁾	z ⁴²⁾	Guide rail	
				W ["]	Y ["]
C 4825 R / 6 12 UDG / XDG	7.5	525	2	4	$\frac{3}{16}$
C 4825 R / 10 12 UDG / XDG	15.0	556	2	4	$\frac{3}{16}$
C 4828 R / 6 12 UDG / XDG	7.5	525	2	4	$\frac{3}{16}$
C 4828 R / 10 12 UDG / XDG	15.0	556	2	4	$\frac{3}{16}$
C 5725 R / 6 12 UDG / XDG	7.5	529	2	4	$\frac{3}{16}$
C 5725 R / 10 12 UDG / XDG	15.0	560	2	4	$\frac{3}{16}$
C 5728 R / 10 12 UDG / XDG	15.0	560	2	4	$\frac{3}{16}$
C 5731 R / 10 12 UDG / XDG	15.0	560	3	4	$\frac{3}{16}$
C 5735 R / 10 12 UDG / XDG	15.0	560	3	4	$\frac{3}{16}$
C 5738 R / 10 12 UDG / XDG	15.0	560	3	4	$\frac{3}{16}$

Technical data valid for all countries except the U.S.A.

Size	P ₂ [kW]	[kg] ⁴¹⁾	z ⁴²⁾	Guide rail	
				W [mm]	Y [mm]
C 4825 R / 6 12 UDG / XDG	5,6	238,5	2	100	5
C 4825 R / 10 12 UDG / XDG	11,2	252,5	2	100	5
C 4828 R / 6 12 UDG / XDG	5,6	238,5	2	100	5
C 4828 R / 10 12 UDG / XDG	11,2	252,5	2	100	5
C 5725 R / 6 12 UDG / XDG	5,6	240,5	2	100	5
C 5725 R / 10 12 UDG / XDG	11,2	254,5	2	100	5
C 5728 R / 10 12 UDG / XDG	11,2	254,5	2	100	5

41) Incl. 30 ft [10 m] power cable and guide bracket

42) z = number of blades

Size	P ₂ [kW]	[kg] ⁴¹⁾	z ⁴²⁾	Guide rail	
				W [mm]	Y [mm]
C 5731 R / 10 12 UDG / XDG	11,2	254,5	3	100	5
C 5735 R / 10 12 UDG / XDG	11,2	254,5	3	100	5
C 5738 R / 10 12 UDG / XDG	11,2	254,5	3	100	5

i Dimensions ["] valid for the U.S.A.

Size	A	B	C	C1	ØD	Øda	Ød1	Ødsr
C 4825 R / 6 12 UDG / XDG	41 1/4	33 5/8	9 1/16	7 3/4	18 7/8	11 9/16	19 5/16	26 7/8
C 4825 R / 10 12 UDG / XDG	41 1/4	33 5/8	9 1/16	7 3/4	18 7/8	11 9/16	19 5/16	26 7/8
C 4828 R / 6 12 UDG / XDG	41 1/4	33 5/8	9 1/16	7 3/4	18 7/8	11 9/16	19 5/16	26 7/8
C 4828 R / 10 12 UDG / XDG	41 1/4	33 5/8	9 1/16	7 3/4	18 7/8	11 9/16	19 5/16	26 7/8
C 5725 R / 6 12 UDG / XDG	41 1/4	33 5/8	9 1/16	7 3/4	22 7/16	11 9/16	22 13/16	30 7/16
C 5725 R / 10 12 UDG / XDG	41 1/4	33 5/8	9 1/16	7 3/4	22 7/16	11 9/16	22 13/16	30 7/16
C 5728 R / 10 12 UDG / XDG	41 1/4	33 5/8	9 1/16	7 3/4	22 7/16	11 9/16	22 13/16	30 7/16
C 5731 R / 10 12 UDG / XDG	41 1/4	33 5/8	9 1/16	7 3/4	22 7/16	11 9/16	22 13/16	30 7/16
C 5735 R / 10 12 UDG / XDG	41 1/4	33 5/8	9 1/16	7 3/4	22 7/16	11 9/16	22 13/16	30 7/16
C 5738 R / 10 12 UDG / XDG	41 1/4	33 5/8	9 1/16	7 3/4	22 7/16	11 9/16	22 13/16	30 7/16

i Dimensions ["] valid for the U.S.A.

Size	E	F	G	H	L	M	N	S	T
C 4825 R / 6 12 UDG / XDG	1 11/16	1 3/4	4 3/16	20	37 1/2	30 11/16	52 9/16	15 7/8	10 5/8
C 4825 R / 10 12 UDG / XDG	1 11/16	1 3/4	4 3/16	20	37 1/2	30 11/16	52 9/16	15 7/8	10 5/8
C 4828 R / 6 12 UDG / XDG	1 11/16	1 3/4	4 3/16	20	37 1/2	30 11/16	52 9/16	15 7/8	10 5/8
C 4828 R / 10 12 UDG / XDG	1 11/16	1 3/4	4 3/16	20	37 1/2	30 11/16	52 9/16	15 7/8	10 5/8
C 5725 R / 6 12 UDG / XDG	1 11/16	1 3/4	4 3/16	20	37 1/2	34 7/16	52 9/16	15 7/8	10 5/8
C 5725 R / 10 12 UDG / XDG	1 11/16	1 3/4	4 3/16	20	37 1/2	34 7/16	52 9/16	15 7/8	10 5/8
C 5728 R / 10 12 UDG / XDG	1 11/16	1 3/4	4 3/16	20	37 1/2	34 7/16	52 9/16	15 7/8	10 5/8
C 5731 R / 10 12 UDG / XDG	1 11/16	1 3/4	4 3/16	20	37 1/2	34 7/16	52 9/16	15 7/8	10 5/8
C 5735 R / 10 12 UDG / XDG	1 11/16	1 3/4	4 3/16	20	37 1/2	34 7/16	52 9/16	15 7/8	10 5/8
C 5738 R / 10 12 UDG / XDG	1 11/16	1 3/4	4 3/16	20	37 1/2	34 7/16	52 9/16	15 7/8	10 5/8


i Dimensions [mm] valid for all countries except the U.S.A.

Size	A	B	C	C1	ØD	Øda	Ød1	Ødsr
C 4825 R / 6 12 UDG / XDG	1048	854	230	197	480	294	490	683
C 4825 R / 10 12 UDG / XDG	1048	854	230	197	480	294	490	683
C 4828 R / 6 12 UDG / XDG	1048	854	230	197	480	294	490	683
C 4828 R / 10 12 UDG / XDG	1048	854	230	197	480	294	490	683
C 5725 R / 6 12 UDG / XDG	1048	854	230	197	570	294	580	773
C 5725 R / 10 12 UDG / XDG	1048	854	230	197	570	294	580	773
C 5728 R / 10 12 UDG / XDG	1048	854	230	197	570	294	580	773
C 5731 R / 10 12 UDG / XDG	1048	854	230	197	570	294	580	773
C 5735 R / 10 12 UDG / XDG	1048	854	230	197	570	294	580	773
C 5738 R / 10 12 UDG / XDG	1048	854	230	197	570	294	580	773

i Dimensions [mm] valid for all countries except the U.S.A.

Size	E	F	G	H	L	M	N	S	T
C 4825 R / 6 12 UDG / XDG	43	44	106	508	953	780	1335	403	270
C 4825 R / 10 12 UDG / XDG	43	44	106	508	953	780	1335	403	270
C 4828 R / 6 12 UDG / XDG	43	44	106	508	953	780	1335	403	270
C 4828 R / 10 12 UDG / XDG	43	44	106	508	953	780	1335	403	270
C 5725 R / 6 12 UDG / XDG	43	44	106	508	953	875	1335	403	270
C 5725 R / 10 12 UDG / XDG	43	44	106	508	953	875	1335	403	270
C 5728 R / 10 12 UDG / XDG	43	44	106	508	953	875	1335	403	270
C 5731 R / 10 12 UDG / XDG	43	44	106	508	953	875	1335	403	270
C 5735 R / 10 12 UDG / XDG	43	44	106	508	953	875	1335	403	270
C 5738 R / 10 12 UDG / XDG	43	44	106	508	953	875	1335	403	270

Amamix 600, 60 Hz, n = 585 rpm, motor housing material stainless steel - version with jet ring

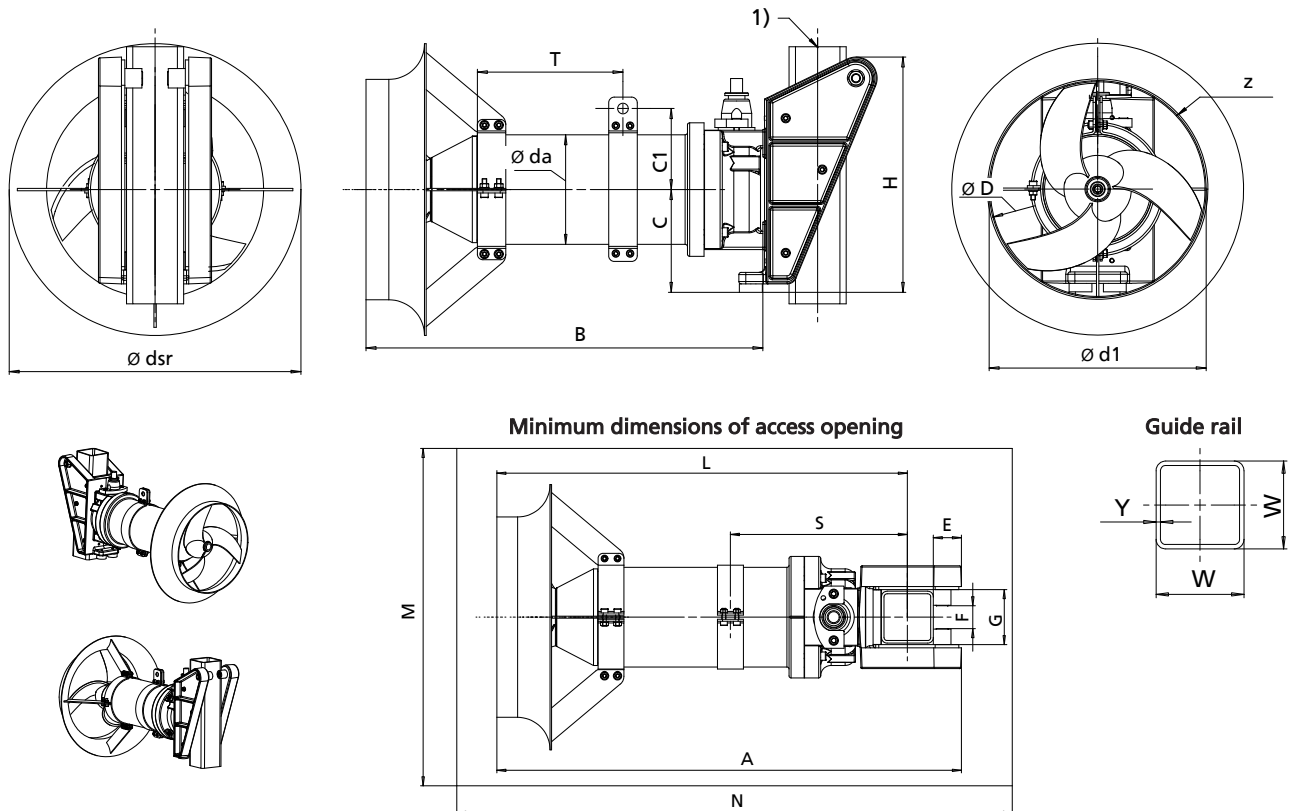

1) = guide rail

 Technical data valid for the U.S.A.

Size	P ₂ [hp]	[lbs] ⁽⁴³⁾	z ⁽⁴⁴⁾	Guide rail	
				W ["]	Y ["]
C 4825 R / 4 12 UMC	7,5	360	2	4	³ / ₁₆
C 4825 R / 8 12 UMC	15,0	474	2	4	³ / ₁₆
C 4828 R / 4 12 UMC	7,5	360	2	4	³ / ₁₆
C 4828 R / 8 12 UMC	15,0	474	2	4	³ / ₁₆
C 5725 R / 4 12 UMC	7,5	364	2	4	³ / ₁₆
C 5725 R / 8 12 UMC	15,0	478	2	4	³ / ₁₆
C 5728 R / 8 12 UMC	15,0	478	2	4	³ / ₁₆
C 5731 R / 8 12 UMC	15,0	478	3	4	³ / ₁₆
C 5738 R / 8 12 UMC	15,0	478	3	4	³ / ₁₆

 Technical data valid for all countries except the U.S.A.

Size	P ₂ [kW]	[kg] ⁴³⁾	z ⁴⁴⁾	Guide rail	
				W [mm]	Y [mm]
C 4825 R / 4 12 UMC	5,6	163,5	2	100	5
C 4825 R / 8 12 UMC	11,2	215,5	2	100	5
C 4828 R / 4 12 UMC	5,6	163,5	2	100	5
C 4828 R / 8 12 UMC	11,2	215,5	2	100	5
C 5725 R / 4 12 UMC	5,6	165,5	2	100	5
C 5725 R / 8 12 UMC	11,2	217,5	2	100	5
C 5728 R / 8 12 UMC	11,2	217,5	2	100	5
C 5731 R / 8 12 UMC	11,2	217,5	3	100	5
C 5738 R / 8 12 UMC	11,2	217,5	3	100	5

43) Incl. 30 ft [10 m] power cable and guide bracket

44) z = number of blades

i Dimensions ["] valid for the U.S.A.

Size	A	B	C	C1	ØD	Øda	Ød1	Ødsr
C 4825 R / 4 12 UMC	39 ¹¹ / ₁₆	32 ³ / ₈	8 ⁷ / ₁₆	6 ⁷ / ₈	18 ⁷ / ₈	9 ⁷ / ₈	19 ⁵ / ₁₆	26 ⁷ / ₈
C 4825 R / 8 12 UMC	44 ⁷ / ₁₆	37 ¹ / ₁₆	8 ⁷ / ₁₆	6 ⁷ / ₈	18 ⁷ / ₈	9 ⁷ / ₈	19 ⁵ / ₁₆	26 ⁷ / ₈
C 4828 R / 4 12 UMC	39 ¹¹ / ₁₆	32 ³ / ₈	8 ⁷ / ₁₆	6 ⁷ / ₈	18 ⁷ / ₈	9 ⁷ / ₈	19 ⁵ / ₁₆	26 ⁷ / ₈
C 4828 R / 8 12 UMC	44 ⁷ / ₁₆	37 ¹ / ₁₆	8 ⁷ / ₁₆	6 ⁷ / ₈	18 ⁷ / ₈	9 ⁷ / ₈	19 ⁵ / ₁₆	26 ⁷ / ₈
C 5725 R / 4 12 UMC	39 ¹¹ / ₁₆	32 ³ / ₈	8 ⁷ / ₁₆	6 ⁷ / ₈	22 ⁷ / ₁₆	9 ⁷ / ₈	22 ¹³ / ₁₆	30 ⁷ / ₁₆
C 5725 R / 8 12 UMC	44 ⁷ / ₁₆	37 ¹ / ₁₆	8 ⁷ / ₁₆	6 ⁷ / ₈	22 ⁷ / ₁₆	9 ⁷ / ₈	22 ¹³ / ₁₆	30 ⁷ / ₁₆
C 5728 R / 8 12 UMC	44 ⁷ / ₁₆	37 ¹ / ₁₆	8 ⁷ / ₁₆	6 ⁷ / ₈	22 ⁷ / ₁₆	9 ⁷ / ₈	22 ¹³ / ₁₆	30 ⁷ / ₁₆
C 5731 R / 8 12 UMC	44 ⁷ / ₁₆	37 ¹ / ₁₆	8 ⁷ / ₁₆	6 ⁷ / ₈	22 ⁷ / ₁₆	9 ⁷ / ₈	22 ¹³ / ₁₆	30 ⁷ / ₁₆
C 5738 R / 8 12 UMC	44 ⁷ / ₁₆	37 ¹ / ₁₆	8 ⁷ / ₁₆	6 ⁷ / ₈	22 ⁷ / ₁₆	9 ⁷ / ₈	22 ¹³ / ₁₆	30 ⁷ / ₁₆

i Dimensions ["] valid for the U.S.A.

Size	E	F	G	H	L	M	N	S	T
C 4825 R / 4 12 UMC	1 ¹¹ / ₁₆	1 ³ / ₄	4 ³ / ₁₆	16 ⁹ / ₁₆	36	30 ¹¹ / ₁₆	50 ¹³ / ₁₆	14 ¹⁵ / ₁₆	9 ¹³ / ₁₆
C 4825 R / 8 12 UMC	1 ¹¹ / ₁₆	1 ³ / ₄	4 ³ / ₁₆	16 ⁹ / ₁₆	40 ³ / ₄	30 ¹¹ / ₁₆	55 ¹ / ₂	17 ¹ / ₂	12 ³ / ₁₆
C 4828 R / 4 12 UMC	1 ¹¹ / ₁₆	1 ³ / ₄	4 ³ / ₁₆	16 ⁹ / ₁₆	36	30 ¹¹ / ₁₆	50 ¹³ / ₁₆	14 ¹⁵ / ₁₆	9 ¹³ / ₁₆
C 4828 R / 8 12 UMC	1 ¹¹ / ₁₆	1 ³ / ₄	4 ³ / ₁₆	16 ⁹ / ₁₆	40 ³ / ₄	30 ¹¹ / ₁₆	50 ¹³ / ₁₆	17 ¹ / ₂	12 ³ / ₁₆
C 5725 R / 4 12 UMC	1 ¹¹ / ₁₆	1 ³ / ₄	4 ³ / ₁₆	16 ⁹ / ₁₆	36	34 ¹ / ₁₆	50 ¹³ / ₁₆	14 ¹⁵ / ₁₆	9 ¹³ / ₁₆
C 5725 R / 8 12 UMC	1 ¹¹ / ₁₆	1 ³ / ₄	4 ³ / ₁₆	16 ⁹ / ₁₆	40 ³ / ₄	34 ⁷ / ₁₆	50 ¹³ / ₁₆	17 ¹ / ₂	12 ³ / ₁₆
C 5728 R / 8 12 UMC	1 ¹¹ / ₁₆	1 ³ / ₄	4 ³ / ₁₆	16 ⁹ / ₁₆	40 ³ / ₄	34 ⁷ / ₁₆	50 ¹³ / ₁₆	17 ¹ / ₂	12 ³ / ₁₆
C 5731 R / 8 12 UMC	1 ¹¹ / ₁₆	1 ³ / ₄	4 ³ / ₁₆	16 ⁹ / ₁₆	40 ³ / ₄	34 ⁷ / ₁₆	50 ¹³ / ₁₆	17 ¹ / ₂	12 ³ / ₁₆
C 5738 R / 8 12 UMC	1 ¹¹ / ₁₆	1 ³ / ₄	4 ³ / ₁₆	16 ⁹ / ₁₆	40 ³ / ₄	34 ⁷ / ₁₆	50 ¹³ / ₁₆	17 ¹ / ₂	12 ³ / ₁₆

i Dimensions [mm] valid for all countries except the U.S.A.

Size	A	B	C	C1	ØD	Øda	Ød1	Ødsr
C 4825 R / 4 12 UMC	1008	822	215	175	480	251	490	683
C 4825 R / 8 12 UMC	1128	942	215	175	480	251	490	683
C 4828 R / 4 12 UMC	1008	822	215	175	480	251	490	683
C 4828 R / 8 12 UMC	1128	942	215	175	480	251	490	683
C 5725 R / 4 12 UMC	1008	822	215	175	570	251	580	773
C 5725 R / 8 12 UMC	1128	942	215	175	570	251	580	773
C 5728 R / 8 12 UMC	1128	942	215	175	570	251	580	773
C 5731 R / 8 12 UMC	1128	942	215	175	570	251	580	773
C 5738 R / 8 12 UMC	1128	942	215	175	570	251	580	773

i Dimensions [mm] valid for all countries except the U.S.A.





Size	E	F	G	H	L	M	N	S	T
C 4825 R / 4 12 UMC	43	44	106	420	915	780	1290	380	250
C 4825 R / 8 12 UMC	43	44	106	420	1035	780	1410	445	310
C 4828 R / 4 12 UMC	43	44	106	420	915	780	1290	380	250
C 4828 R / 8 12 UMC	43	44	106	420	1035	780	1410	445	310
C 5725 R / 4 12 UMC	43	44	106	420	915	875	1290	380	250
C 5725 R / 8 12 UMC	43	44	106	420	1035	875	1410	445	310
C 5728 R / 8 12 UMC	43	44	106	420	1035	875	1410	445	310
C 5731 R / 8 12 UMC	43	44	106	420	1035	875	1410	445	310
C 5738 R / 8 12 UMC	43	44	106	420	1035	875	1410	445	310





Accessories

Overview of accessories

Valid for all countries except the U.S.A.:


Overview of accessories

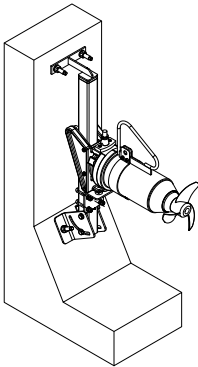Accessories	Amamix				Illustration	Description
	200	300	400	500		
Accessories set 4 (⇒ Page 41)	X	X	X	X		Lifting devices and lifting tackle
Accessories set 6 Floor mounting (⇒ Page 43)	X	X	-	-		- With horizontal swiveling option - Fixed vertical installation height - Condition: Place of installation is accessible (e.g. stormwater relief structures)
Accessories set 7 Mounting on sump/tank wall (⇒ Page 45)	X	X	-	-		Continuously adjustable installation depth with fixed jet direction. The submersible mixer can be lifted out of the tank or sump for maintenance and inspection work.
Accessories set 7 Mounting on benching and sump/tank wall (⇒ Page 45)	X	X	-	-		Special feature: continuously adjustable installation depth and adjustable jet direction. The submersible mixer can be lifted out of the tank or sump for maintenance and inspection work.
Accessories set 22 Mounting on the sump/tank wall and horizontal tank floor (inclined by 0 - 0.5°) (⇒ Page 50)	X	X	X	X		Special feature: continuously adjustable installation depth and adjustable jet direction. The submersible mixer can be lifted out of the tank or sump for maintenance and inspection work.

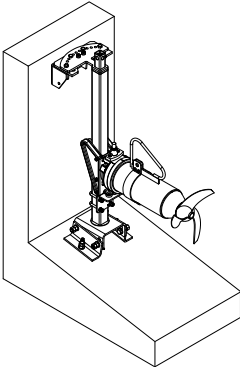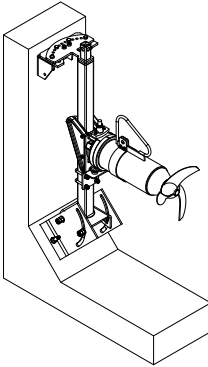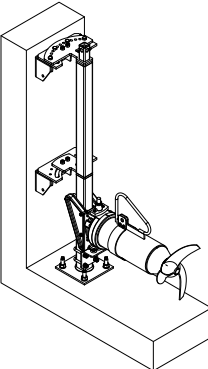Accessories	Amamix				Illustration	Description
	200	300	400	600		
Accessories set 22 Mounting on the sump/tank wall and sloping tank floor (inclined by 0.5 - 10°) (⇒ Page 54)	X	X	X	X		Special feature: continuously adjustable installation depth and adjustable jet direction. The submersible mixer can be lifted out of the tank or sump for maintenance and inspection work.
Accessories set 22 Mounting on the sump/tank wall and on the inclined tank floor or on the sump/tank wall (inclined by 10 - 90°) (⇒ Page 58)	X	X	X	X		Special feature: continuously adjustable installation depth and adjustable jet direction. The submersible mixer can be lifted out of the tank or sump for maintenance and inspection work.
Accessories set 22 Accessories set 22 - options with middle support for guide rail (⇒ Page 62)	X	X	X	X		For installation depths > 6 m
Accessories set 22 Accessories set 22 - options Pitch adapter (⇒ Page 65)	X	X	X	X		For upward or downward pitch adjustment in increments of 10° from 40° upwards to 40° downwards (Amamix 600 G: 15° or 30° upward or downward pitch)
Forcing screws	X	X	X	X		
Guide rails for accessories sets 7 and 22	X	X	X	X		
Other accessories (⇒ Page 74)	X	X	X	X		
Lifting equipment	X	X	X	X		See type series booklet "KSB Lifting Equipment" 1596.5

Valid for the U.S.A.:

Overview of accessories


Accessories	Amamix				Illustration	Description
	200	300	400	600		
Accessories set 6 Floor mounting (⇒ Page 43)	X	X	-	-		- With horizontal swiveling option - Fixed vertical installation height - Condition: Place of installation is accessible (e.g. stormwater relief structures)
Other accessories (⇒ Page 74)	X	X	X	X		
Lifting equipment	X	X	X	X		See type series booklet "KSB Lifting Equipment" 1596.5

Accessories (valid for all countries except the U.S.A.)

Accessories set 4

Overview of product features


Lifting tackle



Lifting tackle

1	Attachment point (center-of-gravity position) ⁴⁵⁾
---	--


Lifting ropes



Lifting rope


1	Lifting rope made of 1.4401 or
2	Lifting rope made of PP
3	Attachment point on submersible mixer

Rope winder/bollard



1	Rope winder
---	-------------

Alternative combination: bail on submersible mixer / lifting hook on lifting rope of lifting equipment

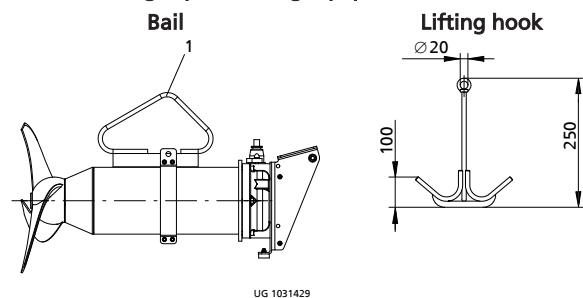

1 Bail

⁴⁵⁾ Shackle included in scope of supply

Overview of accessories set 4: lifting devices and lifting tackle

Description		Amamix								Material	Mat. No.	[kg]
		200		300		400		600				
		G	C	G	C	G	C	G	C			
Lifting rope for Haacon cranes ⁴⁶⁾	Ø = 5 mm, L = 12 m	X	X	X	X	X	X	X	X	1.4401	11304621	1.95
	Ø = 5 mm, L = 18 m	X	X	X	X	X	X	X	X	1.4401	11306713	2.7
	Ø = 5 mm, L = 22 m	X	X	X	X	X	X	X	X	1.4401	11306712	3.2
Lifting rope, max. load-carrying capacity 200 kg, 5 m; material: polypropylene ⁴⁷⁾		Select in acc. with mixer weight								PP	11185207	2
Lifting rope, max. load-carrying capacity 450 kg, 5 m; material: polypropylene ⁴⁷⁾										PP	11190024	5
Rope winder/bollard for Haacon cranes for securing the lifting ropes at the tank edge or railing										1.4571	19554260	1.5
Lifting hook, max. load-carrying capacity 500 kg		X	X	X	X	X	X	X	X	1.4301	19219613	2.44
Bail for fitting to the supporting clamp		X	X	-	-	-	-	-	-	1.4571	19219830	1.6
		-	-	X	X	X	-	-	-	1.4571	19219831	2.1
		-	-	-	-	-	-	X	X	1.4571	19219832	2.6

More information

- See type series booklet "KSB lifting equipment" 1596.5

⁴⁶⁾ The lifting rope must be attached to the attachment point on the submersible mixer and can be fastened on the winch of the cranes indicated. When transportable cranes are used, the upper end of the rope is removed from the winch and tied securely around the rope winder. The lower end remains attached to the submersible mixer.


⁴⁷⁾ Use several 5-meter ropes connected via spliced loops for large installation depths.

Accessories set 6

Overview of product features

i Valid for all countries except the U.S.A.

For permanent mounting of the submersible mixer on the tank floor.

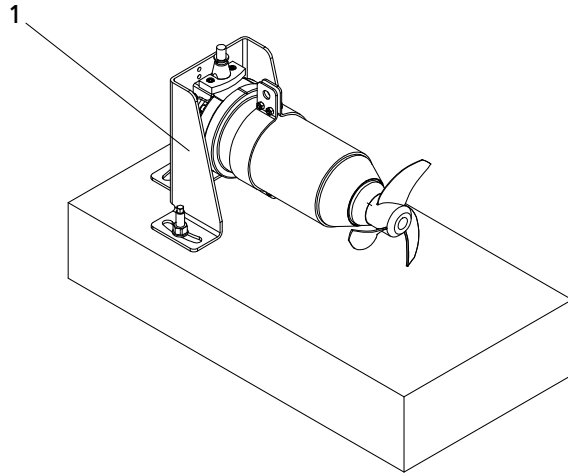

Installation using accessories set 6: permanent mounting of submersible mixer on tank floor

1	Submersible mixer stand
---	-------------------------

Overview of accessories set 6


Description	Amamix				Material	Mat. No.	[kg]
	200	300	400	600			
Submersible mixer stand (for use in tanks which can be drained to provide access to the submersible mixer, e.g. for maintenance and inspection purposes, e.g. stormwater relief structures) incl. 3 chemical anchors for mounting the submersible mixer stand on the tank floor, min. concrete quality C25/30	X	X	48)	48)	1.4301	01109062	8
					1.4571	19556921	8

48) On request

Installation with accessories set 6 - Amamix 200 / 300

i Valid for all countries except the U.S.A.

For permanent **mounting on the tank floor**
(sizes 400 and 600 on request)

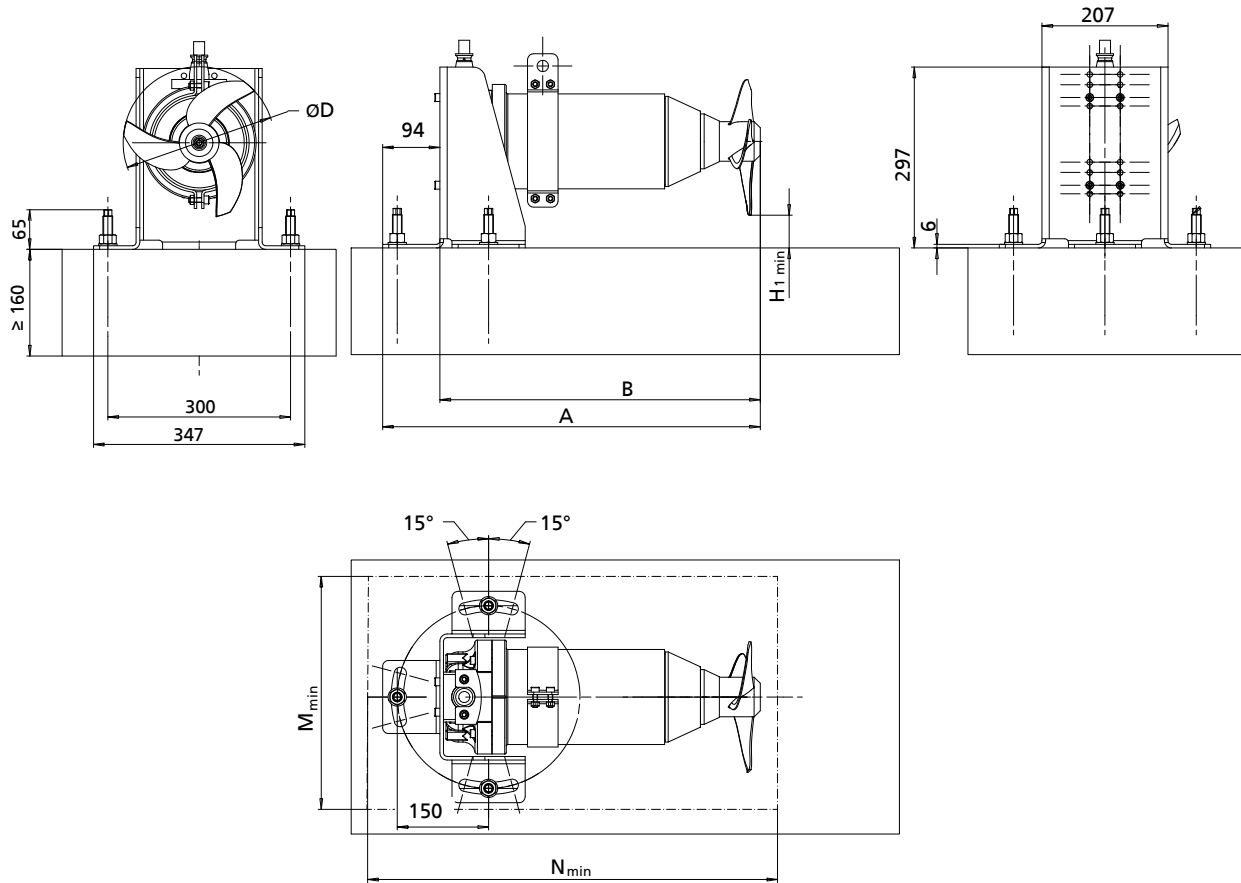

Installation with accessories set 6 - Amamix 200 / 300

Dimensions [mm]


$\varnothing D$	$H_{1 \min}$	A	B	$M_{\min}$	$N_{\min}$
200	48,5	560	466	400	610
300	50	694	600	400	750

Accessories set 7


Overview of product features

i Valid for all countries except the U.S.A.

For mounting at the top of the tank wall and at the bottom of the tank wall/benching, level-adjustable.

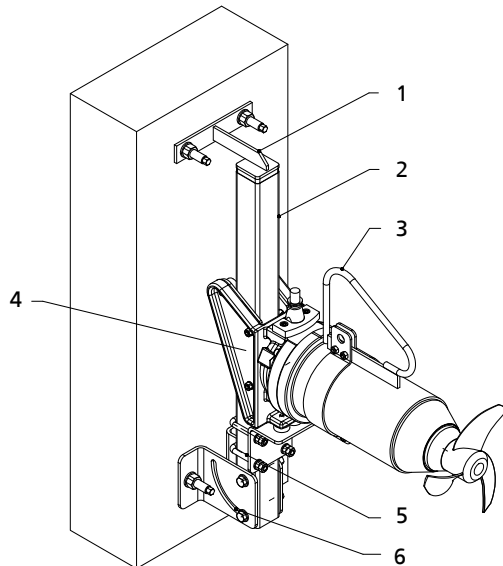

Installation example: mounted on the tank wall

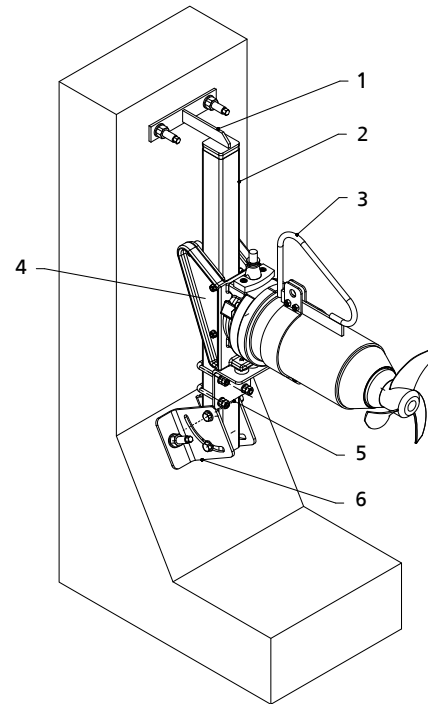

Installation example: mounted on the benching

1	Upper holder	4	Guide bracket for guide rail
2	Guide rail ⁴⁹⁾	5	Retaining bracket for guide rail
3	Bail (optional)	6	Lower holder

Overview of accessories set 7: mounting at the tank wall or on the benching

Description	Amamix				Material	Mat. No.	[kg]
	200		300				
	G	C	G	C			
Upper holder for guide rail 60 x 60 x 3 mm	X	X	X	X	1.4301	01109095	1.5
Upper holder for guide rail 60 x 60 x 3 mm	X	X	X	X	1.4571	01103807	1.5
Guide rail	(⇒ Page 73)						
Guide bracket for guide rail 60 x 60 x 3 mm ⁵⁰⁾	X	-	X	-	EN-GJL-250	19203139	6.83
Guide bracket for guide rail 60 x 60 x 3 mm	-	X	-	X	1.4571	19202241	3.4
Retaining bracket for guide rail 60 x 60 x 3 mm ⁵¹⁾	X	X	X	X	1.4571	19202369	1.5
Retaining bracket for guide rail 60 x 60 x 3 mm ⁵¹⁾	X	X	X	X	1.4301	01109104	1.5
Lower holder for guide rail 60 x 60 x 3 mm	X	X	X	X	1.4301	01109097	2.8
Lower holder for guide rail 60 x 60 x 3 mm	X	X	X	X	1.4571	01103809	2.8




⁴⁹⁾ Not included in KSB's general scope of supply

⁵⁰⁾ Optional: guide bracket for guide rail 60 x 60 x 3 mm made of 1.4571 (19202241)

⁵¹⁾ The materials of the retaining bracket and of the guide rail are usually identical.

Installation with accessories set 7 - Amamix 200 / 300

For mounting at the top of the tank wall and on the benching,
level-adjustable.

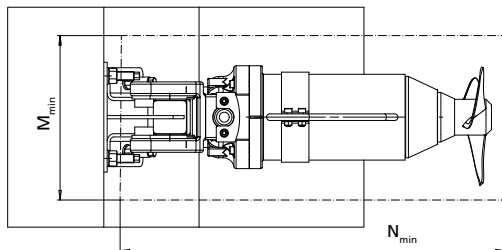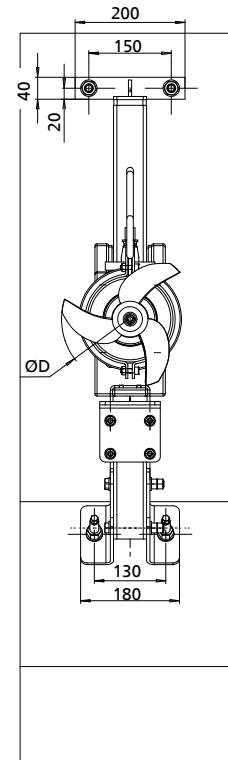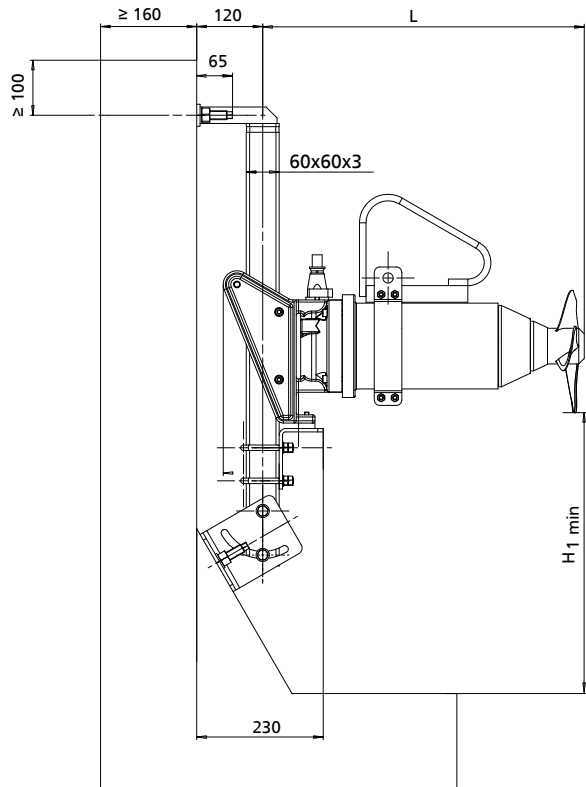


Installation with accessories set 7 - Amamix 200 / 300

Dimensions [mm]

Ø D	Motor housing material	H ₁	L	M _{min}	N _{min}
200	G	120	524	275	700
200	C	120	520	275	700
300	G	150	659	375	830
300	C	150	655	375	830

Installation with accessories set 7 - Amamix 200 / 300

For mounting at the top and bottom of the tank wall,
level-adjustable

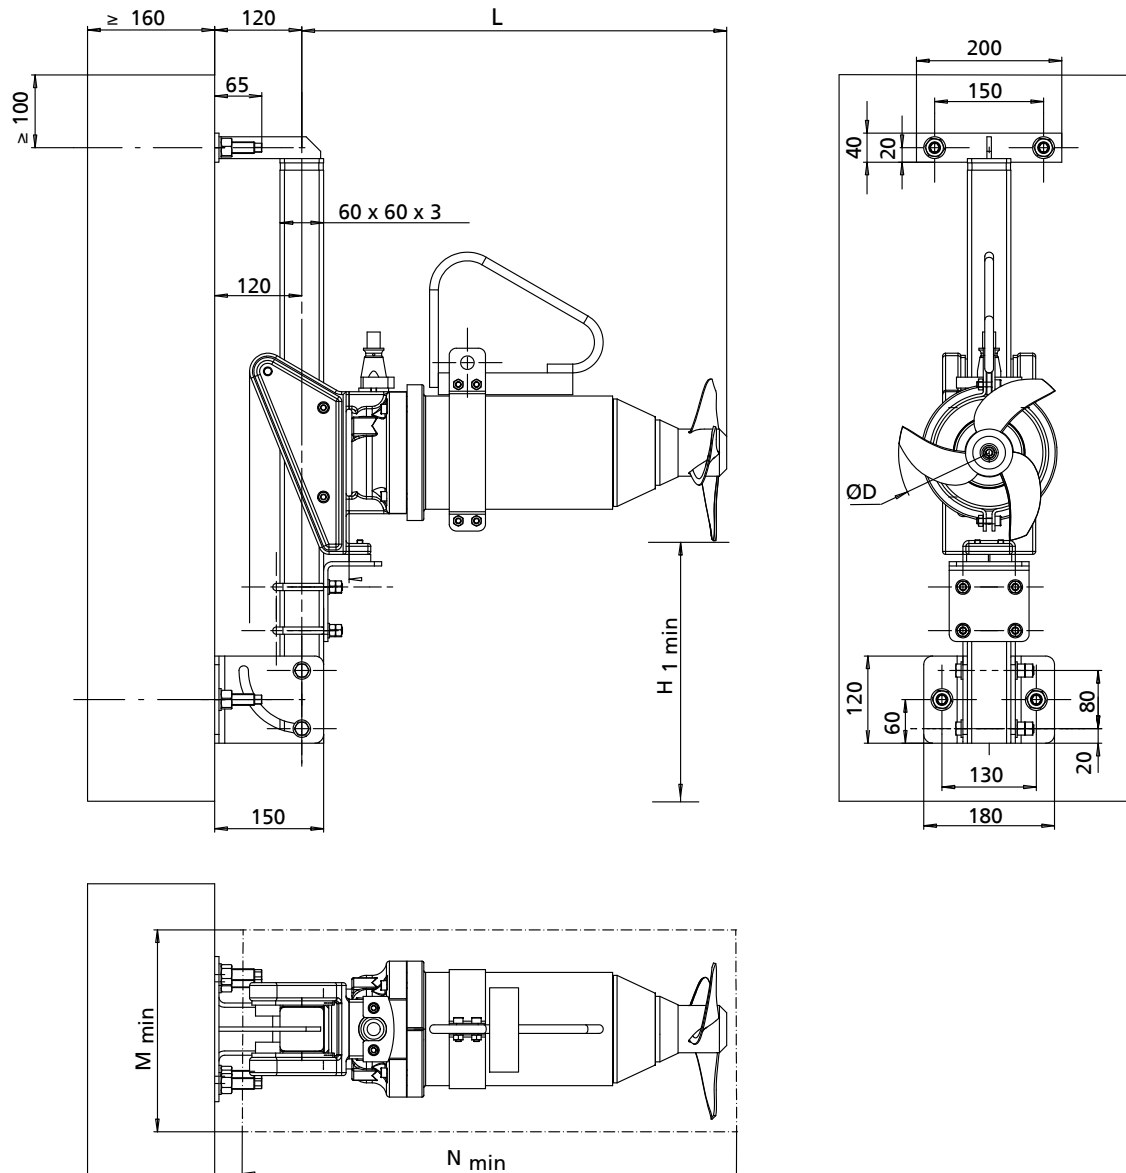

Installation with accessories set 7 - Amamix 200 / 300

Dimensions [mm]

Ø D	Motor housing material	H ₁	L	M _{min}	N _{min}
200	G	120	524	275	700
200	C	120	520	275	700
300	G	150	659	375	830
300	C	150	655	375	830

Accessories set 22

Accessories set 22 comprises the upper guide rail holder, the guide rail, the retaining bracket and the lower guide rail holder.

Guide rails


The cross-section of the guide rail depends on the mixer size:

Overview of guide rails

Amamix	Guide rail cross-section	
	60 x 60 x 3 mm	100 x 100 x 5 mm
200	X	-
300	X	-
400	X	X
600	-	X

The guide rail can be supplied either by KSB or the customer/operator.


Overview of guide rails

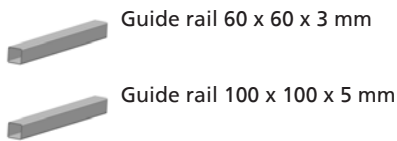

Upper holder

The upper holder is identical for all installation variants (installation on horizontal, sloping or inclined floor). Two designs are available:


Overview of upper holders

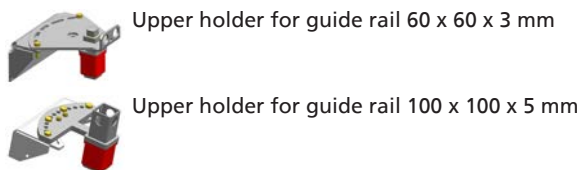

Lower holder

Different types of lower holders are available to suit individual tank floor designs.


Overview of lower holders

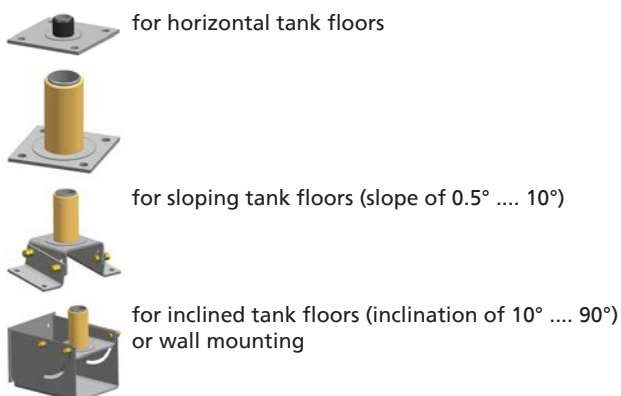

Retaining bracket

The retaining bracket is mounted on the guide rail and serves as a bottom stop for the submersible mixer. Retaining brackets are available for guide rails 60 x 60 x 3 mm and 100 x 100 x 5 mm

Overview of retaining brackets

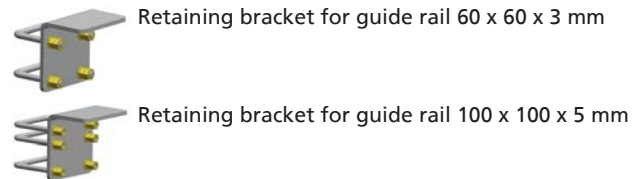

Guide bracket for guide rail

The guide bracket is bolted to the motor housing cover of the submersible mixer and serves to guide the submersible mixer along the guide rail. Any forces generated by the submersible mixer, such as the reactive force to the propeller's axial thrust, the motor torque and any lateral forces are transferred into the guide rail via the guide bracket and thus safely dissipated into the foundation (tank wall and floor). The upper holder provides a mixer swiveling option around the guide rail axis of up to 45° towards both sides.

Overview of guide brackets for the guide rail



Pitch adapter

The pitch adapter is fitted between the motor housing cover of the submersible mixer and the guide bracket. By fitting a pitch adapter, the jet pitch can be adjusted either upwards or downwards from the standard horizontal installation position.

Overview of pitch adapters



Pitch adapter for all sizes except Amamix 600 G⁵²⁾



Pitch adapter 15° for Amamix 600 G.⁵³⁾



Pitch adapter 30° for Amamix 600 G⁵⁴⁾

Middle support

For installation depths > 6 m a middle support is required for the guide rail; this may also be useful for lower installation depths depending on tank design and flow conditions.

Overview of middle supports



Middle support for guide rail 60 x 60 x 3 mm



Middle support for guide rail 100 x 100 x 5 mm

⁵²⁾ Pitch can be adjusted through a range of +/- 40°, depending on the mixer size.

⁵³⁾ Allows only fixed angles of 15°, jet direction (upward or downward) must be specified in the purchase order.


⁵⁴⁾ Allows only fixed angles of 30°, jet direction (upward or downward) must be specified in the purchase order.

For mounting on the tank wall and horizontal tank floor


Overview of product features

 Valid for all countries except the U.S.A.

Installation using accessories set 22: mounting on the tank wall and horizontal tank floor

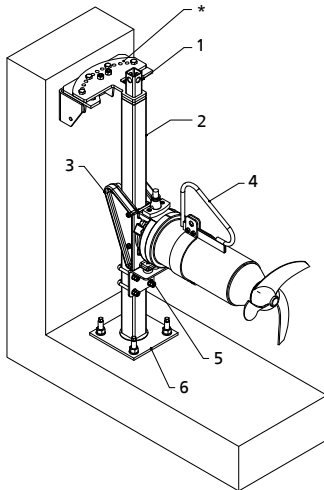

Amamix 200, 300, 400

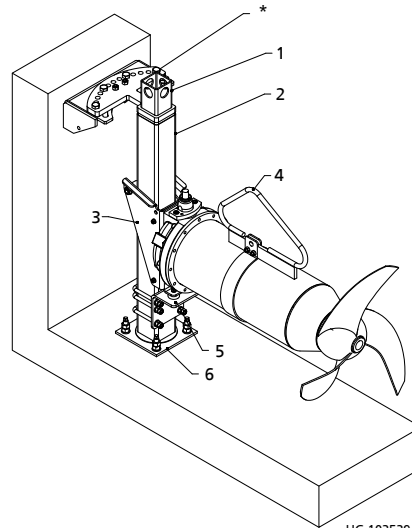

UG 1035394

Amamix 400, 600

*	Swiveling option through 45° to the left and right around the guide rail axis (in increments of 7.5°)	4	Bail (optional)
1	Upper holder	5	Retaining bracket for guide rail
2	Guide rail ⁵⁵⁾	6	Lower holder
3	Guide bracket for guide rail		

Overview of standard accessories set 22: mounting on the tank wall and horizontal tank floor

Description	Amamix								Material	Mat. No.	[kg]
	200		300		400		600				
	G	C	G	C	G	C	G	C			
Upper holder for guide rail 60 x 60 x 3 mm, incl. 2 chemical anchors	X	X	X	X	X	X	-	-	1.4301	01306260	8.9
Upper holder for guide rail 60 x 60 x 3 mm, incl. 2 chemical anchors	X	X	X	X	X	X	-	-	1.4571	01306261	8.9
Upper holder for guide rail 100 x 100 x 5 mm, incl. 2 chemical anchors	-	-	-	-	X	X	X	X	1.4301	01313458	23.23
Upper holder for guide rail 100 x 100 x 5 mm, incl. 2 chemical anchors	-	-	-	-	X	X	X	X	1.4571	01313459	23.23
Guide rail	(⇒ Page 73)										
Guide bracket for guide rail 60 x 60 x 3 mm ⁵⁶⁾	X	-	X	-	-	-	-	-	EN-GJL-250	19203139	6.83
Guide bracket for guide rail 60 x 60 x 3 mm ⁵⁷⁾	-	-	-	-	X	-	-	-	EN-GJL-250	01307155	10.5
Guide bracket for guide rail 60 x 60 x 3 mm	-	X	-	X	-	-	-	-	1.4571	19202241	3.4
Guide bracket for guide rail 60 x 60 x 3 mm	-	-	-	-	-	X	-	-	1.4571	01307156	7
Guide bracket for guide rail 100 x 100 x 5 mm	-	-	-	-	-	-	X	-	EN-GJL-250	19556700	17
Guide bracket for guide rail 100 x 100 x 5 mm ⁵⁸⁾	-	-	-	-	X	-	-	-	EN-GJL-250	19556701	13
Guide bracket for guide rail 100 x 100 x 5 mm	-	-	-	-	-	X	-	-	1.4571	19202242	8.79
Retaining bracket for guide rail 60 x 60 x 3 mm	X	X	X	X	X	X	-	-	1.4301	01109104	1.5
Retaining bracket for guide rail 60 x 60 x 3 mm	X	X	X	X	X	X	-	-	1.4571	19202369	1.5
Retaining bracket for guide rail 100 x 100 x 5 mm	-	-	-	-	X	X	X	X	1.4301	01129810	3.5
Retaining bracket for guide rail 100 x 100 x 5 mm	-	-	-	-	X	X	X	X	1.4571	19202370	3.5

⁵⁵⁾ Not included in KSB's general scope of supply

⁵⁶⁾ Optional: guide bracket for guide rail 60 x 60 x 3 mm made of 1.4571 (19202241)

⁵⁷⁾ Optional: guide bracket for guide rail 60 x 60 x 3 mm made of 1.4571 (01307156)


⁵⁸⁾ Optional: guide bracket for guide rail 100 x 100 x 5 mm made of 1.4571 (19202242)

Description	Amamix								Material	Mat. No.	[kg]
	200		300		400		600				
	G	C	G	C	G	C	G	C			
Lower holder for guide rail 60 x 60 x 3 mm, incl. 4 chemical anchors	X	X	X	X	X	X	-	-	1.4301	01129858	4.24
Lower holder for guide rail 60 x 60 x 3 mm, incl. 4 chemical anchors	X	X	X	X	X	X	-	-	1.4571	01129859	4.24
Lower holder for guide rail 100 x 100 x 5 mm, incl. 4 chemical anchors	-	-	-	-	X	X	X	X	1.4301	01118892	5.68
Lower holder for guide rail 100 x 100 x 5 mm, incl. 4 chemical anchors	-	-	-	-	X	X	X	X	1.4571	01118903	5.68

Installation with accessories set 22 - Amamix 200 / 300 / 400 (except size 4135)

 **Valid for all countries except the U.S.A.**

For mounting at the top of the tank wall and on the tank floor, level-adjustable and with horizontal swiveling option.

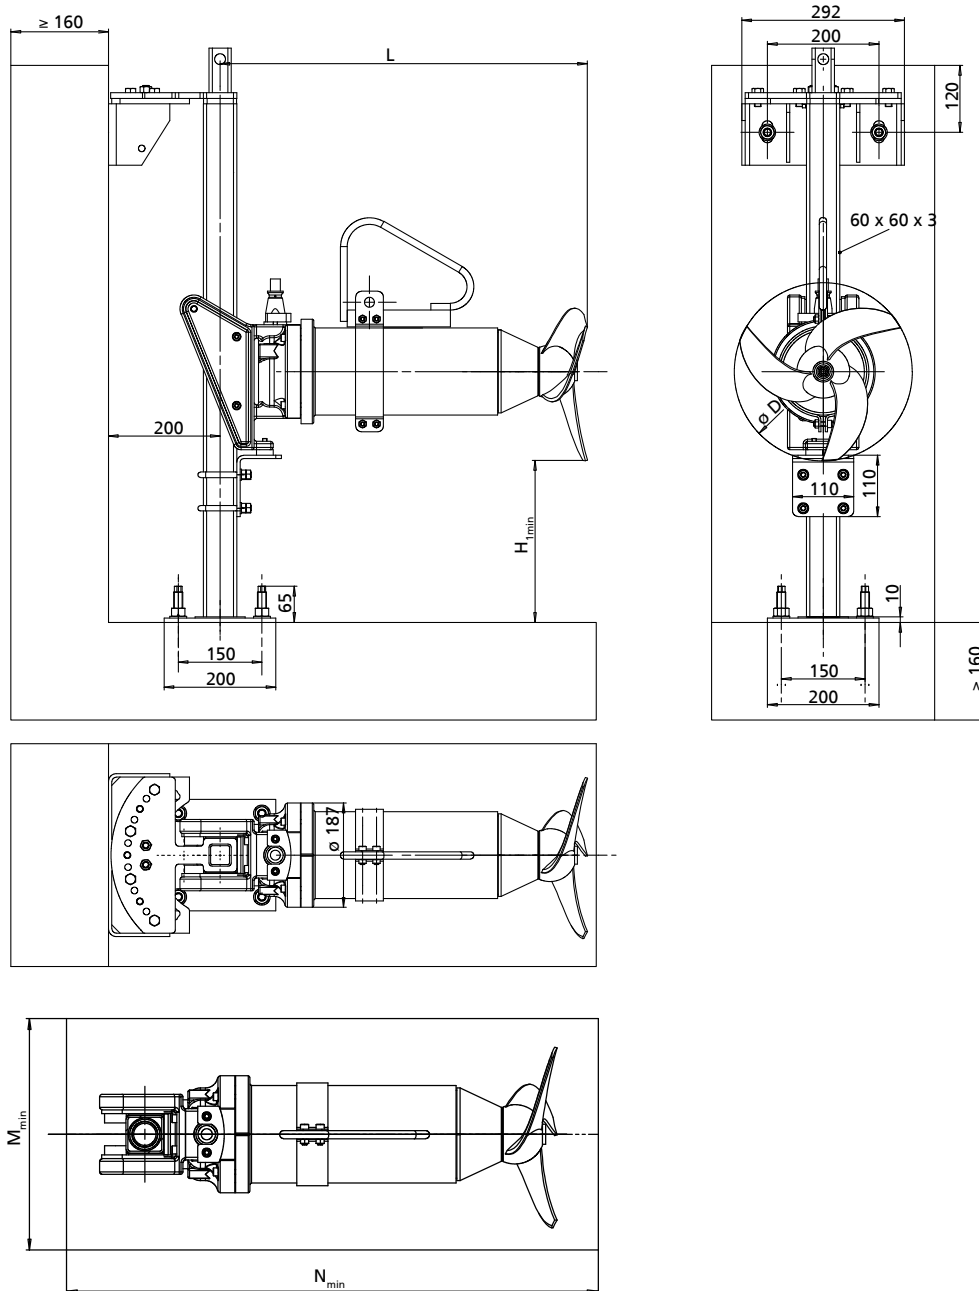

UG 1312313

Installation with accessories set 22 - Amamix 200 / 300 / 400 (except size 4135)


Dimensions [mm]

$\varnothing D$	Motor housing material	L	M_{min}	N_{min}
200	G	524	275	780
200	C	520	275	780
300	G	659	375	910
300	C	655	375	910
400	G	844	460	1050
400	C	844	460	1050

Installation with accessories set 22 - Amamix 400 (size 4135 only) / 600

 **Valid for all countries except the U.S.A.**

For mounting at the top of the tank wall and on a horizontal tank floor, level-adjustable and with horizontal swiveling option.

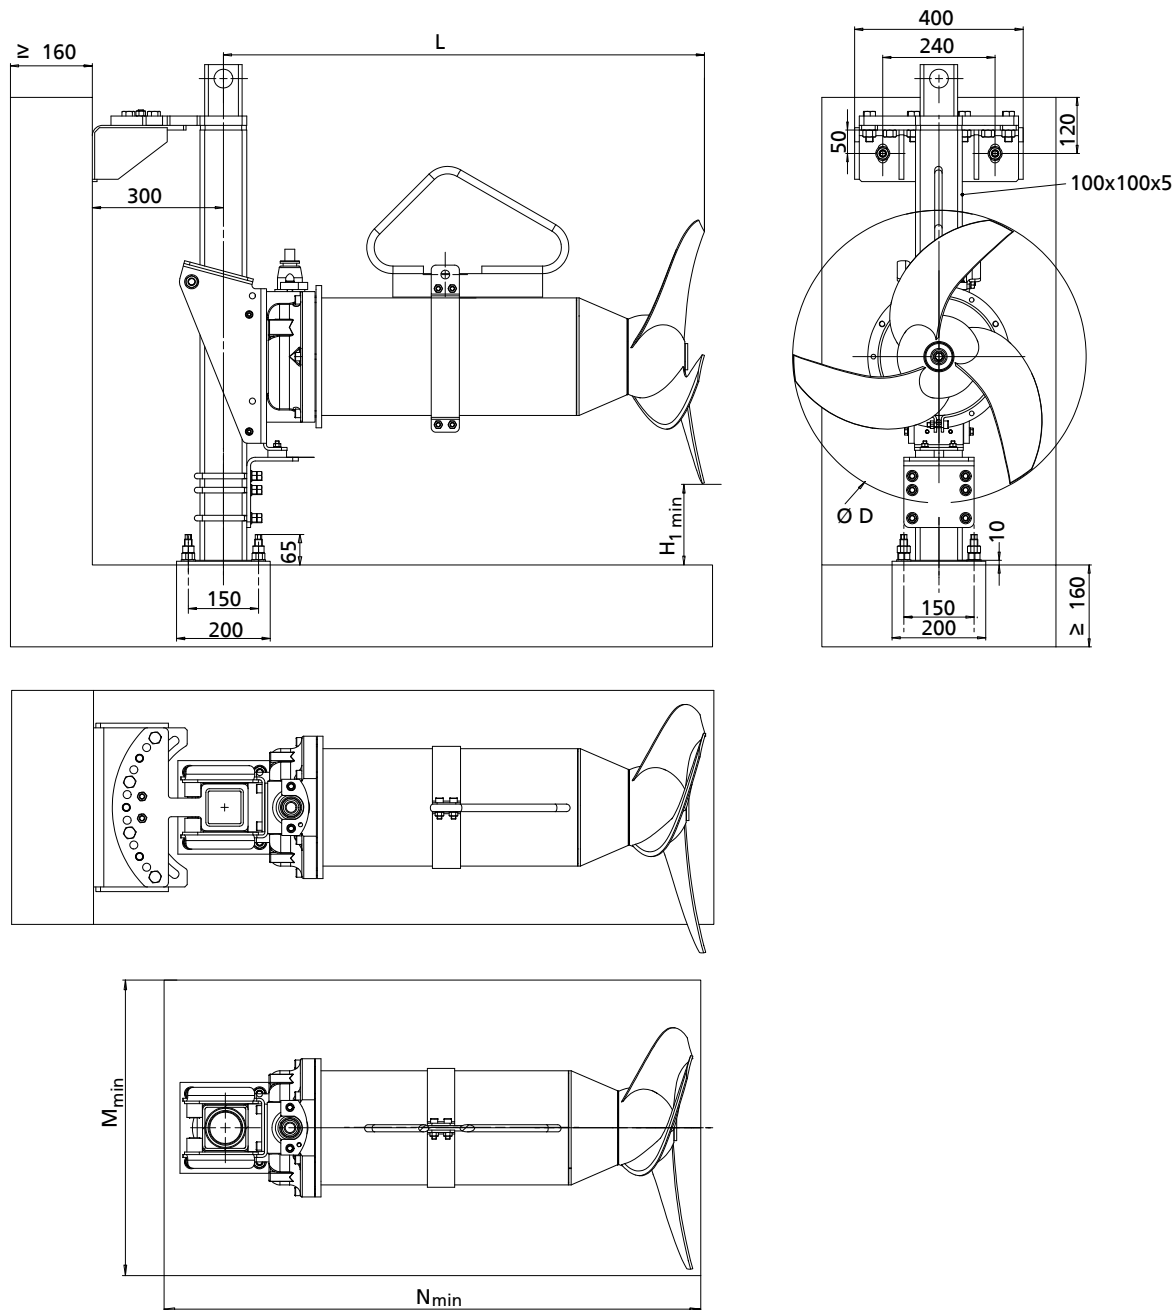

Installation with accessories set 22 - Amamix 400 (size 4135 only) / 600

Dimensions [mm]


Ø D	Motor housing material	H _{1 min}	L _{max}	M _{min}	N _{min}
400	G	205	783	460	1150
400	C	205	780	460	1150
600	G	315	949	700	1310
600	C	315	949	700	1390

For mounting on the tank wall and on a sloping tank floor (0.5° - 10°)


Overview of product features

 Valid for all countries except the U.S.A.

Installation using accessories set 22: mounting on the tank wall and on a sloping tank floor (0.5° ... 10°)

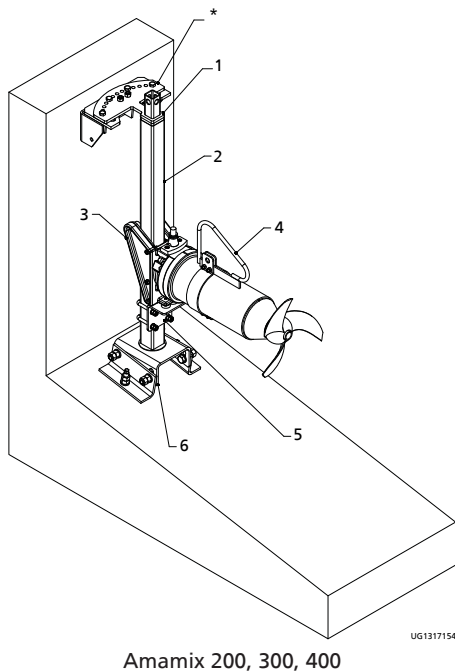

Amamix 200, 300, 400

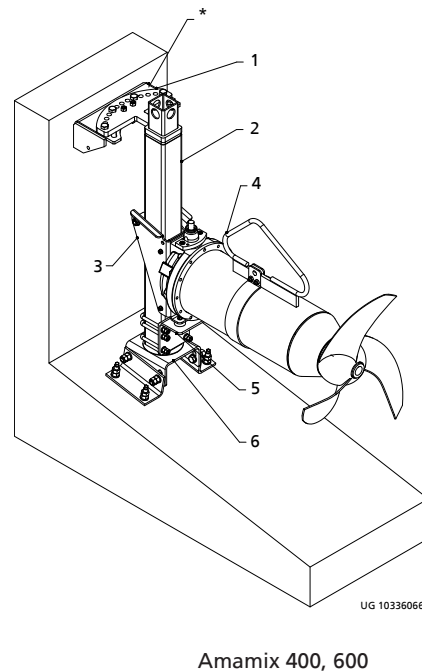

Amamix 400, 600

*	Swiveling option through 45° to the left and right around the guide rail axis (in increments of 7.5°)	4	Bail (optional)
1	Upper holder	5	Retaining bracket for guide rail
2	Guide rail ⁵⁹⁾	6	Lower holder
3	Guide bracket for guide rail		

Overview of standard accessories set 22: mounting on the tank wall and on a sloping tank floor (0.5° ... 10°)

Description	Amamix								Material	Mat. No.	[kg]
	200		300		400		600				
	G	C	G	C	G	C	G	C			
Upper holder for guide rail 60 x 60 x 3 mm, incl. 2 chemical anchors	X	X	X	X	X	X	-	-	1.4301	01306260	8.9
Upper holder for guide rail 60 x 60 x 3 mm, incl. 2 chemical anchors	X	X	X	X	X	X	-	-	1.4571	01306261	8.9
Upper holder for guide rail 100 x 100 x 5 mm, incl. 2 chemical anchors	-	-	-	-	X	X	X	X	1.4301	01313458	23.23
Upper holder for guide rail 100 x 100 x 5 mm, incl. 2 chemical anchors	-	-	-	-	X	X	X	X	1.4571	01313459	23.23
Guide rail	(⇒ Page 73)										
Guide bracket for guide rail 60 x 60 x 3 mm ⁶⁰⁾	X	-	X	-	-	-	-	-	EN-GJL-250	19203139	6.83
Guide bracket for guide rail 60 x 60 x 3 mm ⁶¹⁾	-	-	-	-	X	-	-	-	EN-GJL-250	01307155	10.5
Guide bracket for guide rail 60 x 60 x 3 mm	-	X	-	X	-	-	-	-	1.4571	19202241	3.4
Guide bracket for guide rail 60 x 60 x 3 mm	-	-	-	-	-	X	-	-	1.4571	01307156	7
Guide bracket for guide rail 100 x 100 x 5 mm ⁶²⁾	-	-	-	-	-	-	X	-	EN-GJL-250	19556700	17
Guide bracket for guide rail 100 x 100 x 5 mm	-	-	-	-	X	-	-	-	EN-GJL-250	19556701	13
Guide bracket for guide rail 100 x 100 x 5 mm	-	-	-	-	-	X	-	-	1.4571	19202242	8.79

⁵⁹⁾ Not included in KSB's general scope of supply

⁶⁰⁾ Optional: guide bracket for guide rail 60 x 60 x 3 mm made of 1.4571 (19202241)

⁶¹⁾ Optional: guide bracket for guide rail 60 x 60 x 3 mm made of 1.4571 (01307156)


⁶²⁾ Optional: guide bracket for guide rail 100 x 100 x 5 mm made of 1.4571 (19202242)

Description	Amamix								Material	Mat. No.	[kg]
	200		300		400		600				
	G	C	G	C	G	C	G	C			
Retaining bracket for guide rail 60 x 60 x 3 mm	X	X	X	X	X	X	-	-	1.4301	01109104	1.5
Retaining bracket for guide rail 60 x 60 x 3 mm	X	X	X	X	X	X	-	-	1.4571	19202369	1.5
Retaining bracket for guide rail 100 x 100 x 5 mm	-	-	-	-	X	X	X	X	1.4301	01129810	3.5
Retaining bracket for guide rail 100 x 100 x 5 mm	-	-	-	-	X	X	X	X	1.4571	19202370	3.5
Lower holder for guide rail 60 x 60 x 3 mm, incl. 4 chemical anchors	X	X	X	X	X	X	-	-	1.4301	01129860	9.4
Lower holder for guide rail 60 x 60 x 3 mm, incl. 4 chemical anchors	X	X	X	X	X	X	-	-	1.4571	01129861	9.4
Lower holder for guide rail 100 x 100 x 5 mm, incl. 4 chemical anchors	-	-	-	-	X	X	X	X	1.4301	01118906	11.92
Lower holder for guide rail 100 x 100 x 5 mm, incl. 4 chemical anchors	-	-	-	-	X	X	X	X	1.4571	01118907	11.92

Installation with accessories set 22 - Amamix 200 / 300 / 400

 **Valid for all countries except the U.S.A.**

For mounting at the top of the tank wall and on a sloping tank floor (0.5° - 10°), level-adjustable and with horizontal swiveling option.

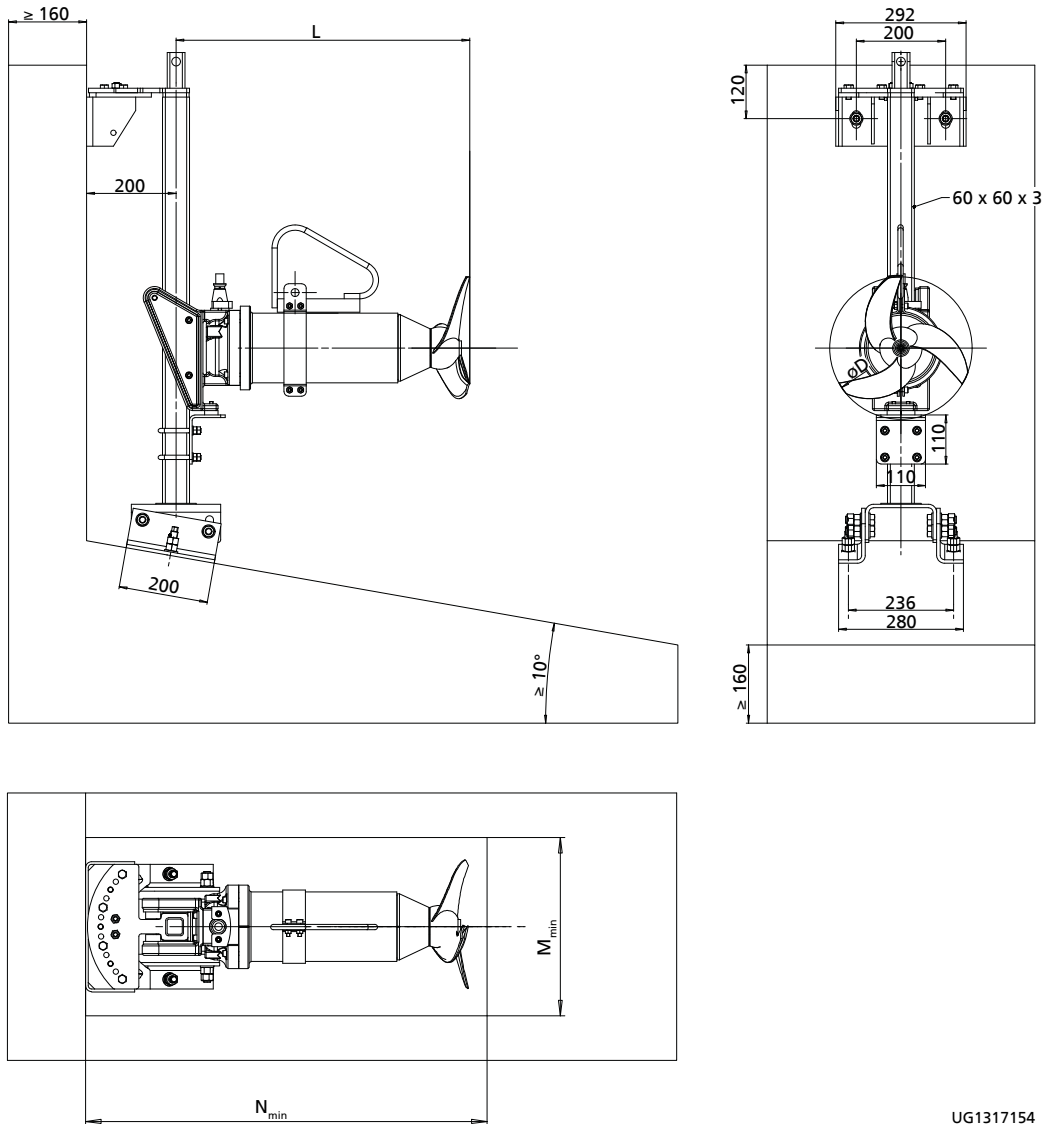

UG1317154

Installation with accessories set 22 - Amamix 200, 300, 400


Dimensions [mm]

Ø D	Motor housing material	L	M _{min}	N _{min}
200	G	524	275	780
200	C	520	275	780
300	G	659	375	910
300	C	655	375	910
400	G	844	460	1050
400	C	844	460	1050

Installation with accessories set 22 - Amamix 400 (size 4135 only) / 600

 **Valid for all countries except the U.S.A.**

For mounting at the top of the tank wall and on a sloping tank floor (0.5° - 10°), level-adjustable and with horizontal swiveling option.

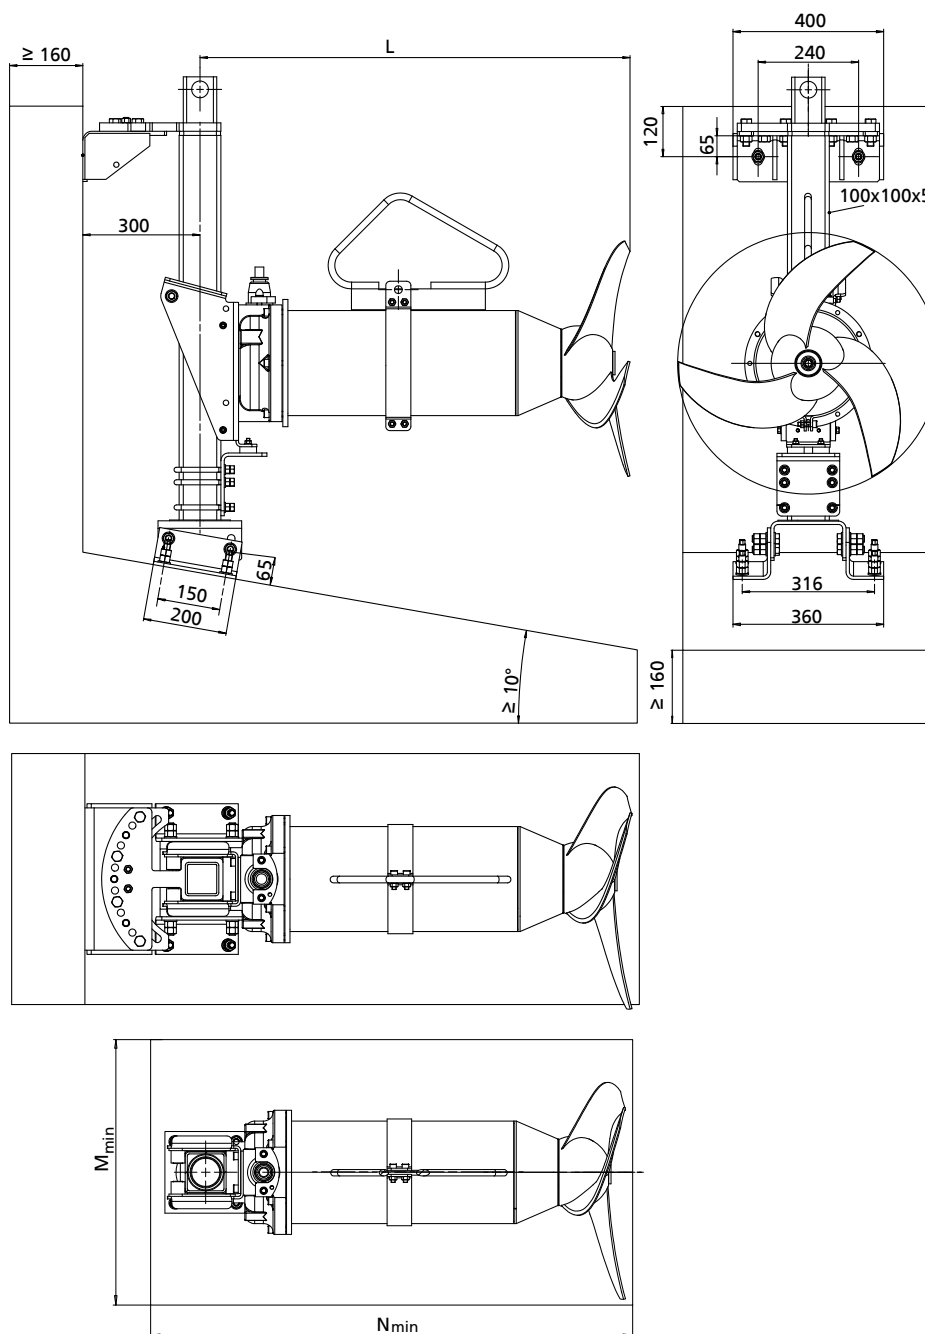

Installation with accessories set 22 - Amamix 400 (size 4135 only) / 600

Dimensions [mm]



Ø D	Motor housing material	H _{1 min}	L _{max}	M _{min}	N _{min}
400	G	205	783	460	1150
400	C	205	780	460	1150
600	G	315	949	700	1310
600	C	315	949	700	1390

For mounting at the top of the tank wall and at the bottom of the tank wall or on an inclined floor (10° - 90°), level-adjustable and with horizontal swiveling option

Overview of product features

 Valid for all countries except the U.S.A.

Installation with accessories set 22: mounted at the top of the tank wall and at the bottom of the tank wall or on an inclined floor (10° - 90°)

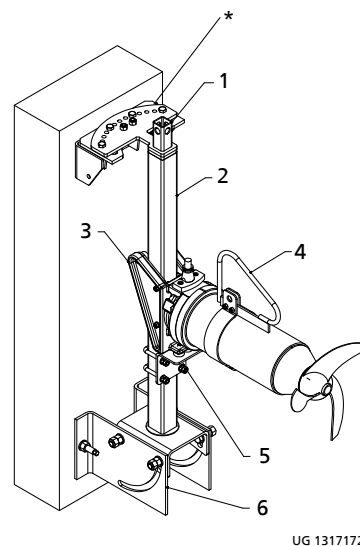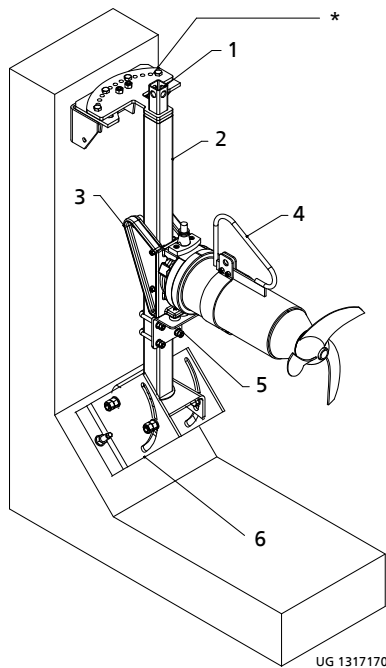

Installation example: mounted on an inclined tank floor (10° - 90°)

Installation example: mounted on the tank wall

*	Swiveling option through 45° to the left and right around the guide rail axis (in increments of 7.5°)	4	Bail (optional)
1	Upper holder	5	Retaining bracket for guide rail
2	Guide rail ⁶³⁾	6	Lower holder
3	Guide bracket for guide rail		

Overview of standard accessories set 22: mounted at the top of the tank wall and at the bottom of the tank wall or on an inclined floor (10° - 90°)

Description	Amamix								Material	Mat. No.	[kg]
	200		300		400		600				
	G	C	G	C	G	C	G	C			
Upper holder for guide rail 60 x 60 x 3 mm, incl. 2 chemical anchors	X	X	X	X	X	X	-	-	1.4301	01306260	8.9
Upper holder for guide rail 60 x 60 x 3 mm, incl. 2 chemical anchors	X	X	X	X	X	X	-	-	1.4571	01306261	8.9
Upper holder for guide rail 100 x 100 x 5 mm, incl. 2 chemical anchors	-	-	-	-	X	X	X	X	1.4301	01313458	23.23
Upper holder for guide rail 100 x 100 x 5 mm, incl. 2 chemical anchors	-	-	-	-	X	X	X	X	1.4571	01313459	23.23
Guide rail	(⇒ Page 73)										
Guide bracket for guide rail 60 x 60 x 3 mm ⁶⁴⁾	X	-	X	-	-	-	-	-	EN-GJL-250	19203139	6.83
Guide bracket for guide rail 60 x 60 x 3 mm ⁶⁵⁾	-	-	-	-	X	-	-	-	EN-GJL-250	01307155	10.5
Guide bracket for guide rail 60 x 60 x 3 mm	-	X	-	X	-	-	-	-	1.4571	19202241	3.4

⁶³⁾ Guide rail 60 x 60 x 3 mm for Amamix 200/300/400 (not included in KSB's general scope of supply)

⁶⁴⁾ Optional: guide bracket for guide rail 60 x 60 x 3 mm made of 1.4571 (19202241)

⁶⁵⁾ Optional: guide bracket for guide rail 60 x 60 x 3 mm made of 1.4571 (01307156)


Description	Amamix								Material	Mat. No.	[kg]
	200		300		400		600				
	G	C	G	C	G	C	G	C			
Guide bracket for guide rail 60 x 60 x 3 mm	-	-	-	-	-	X	-	-	1.4571	01307156	7
Guide bracket for guide rail 100 x 100 x 5 mm	-	-	-	-	-	-	X	-	EN-GJL-250	19556700	17
Guide bracket for guide rail 100 x 100 x 5 mm ⁶⁶⁾	-	-	-	-	X	-	-	-	EN-GJL-250	19556701	13
Guide bracket for guide rail 100 x 100 x 5 mm	-	-	-	-	-	X	-	-	1.4571	19202242	8.79
Retaining bracket for guide rail 60 x 60 x 3 mm	X	X	X	X	X	X	-	-	1.4301	01109104	1.5
Retaining bracket for guide rail 60 x 60 x 3 mm	X	X	X	X	X	X	-	-	1.4571	19202369	1.5
Retaining bracket for guide rail 100 x 100 x 5 mm	-	-	-	-	X	X	X	X	1.4301	01129810	3.5
Retaining bracket for guide rail 100 x 100 x 5 mm	-	-	-	-	X	X	X	X	1.4571	19202370	3.5
Lower holder for guide rail 60 x 60 x 3 mm, incl. 4 chemical anchors	X	X	X	X	X	X	-	-	1.4301	01129731	13.27
Lower holder for guide rail 60 x 60 x 3 mm, incl. 4 chemical anchors	X	X	X	X	X	X	-	-	1.4571	01129732	13.27
Lower holder for guide rail 100 x 100 x 5 mm, incl. 4 chemical anchors	-	-	-	-	X	X	X	X	1.4301	01314360	26.52
Lower holder for guide rail 100 x 100 x 5 mm, incl. 4 chemical anchors	-	-	-	-	X	X	X	X	1.4571	01314362	26.52

⁶⁶⁾ Optional: guide bracket for guide rail 100 x 100 x 5 mm made of 1.4571 (19202242)

Installation with accessories set 22 - Amamix 200 / 300 / 400 (except size 4135)

 **Valid for all countries except the U.S.A.**

For mounting at the top of the tank wall and at the bottom of the tank wall or on an inclined floor (10° - 90°), level-adjustable and with horizontal swiveling option.

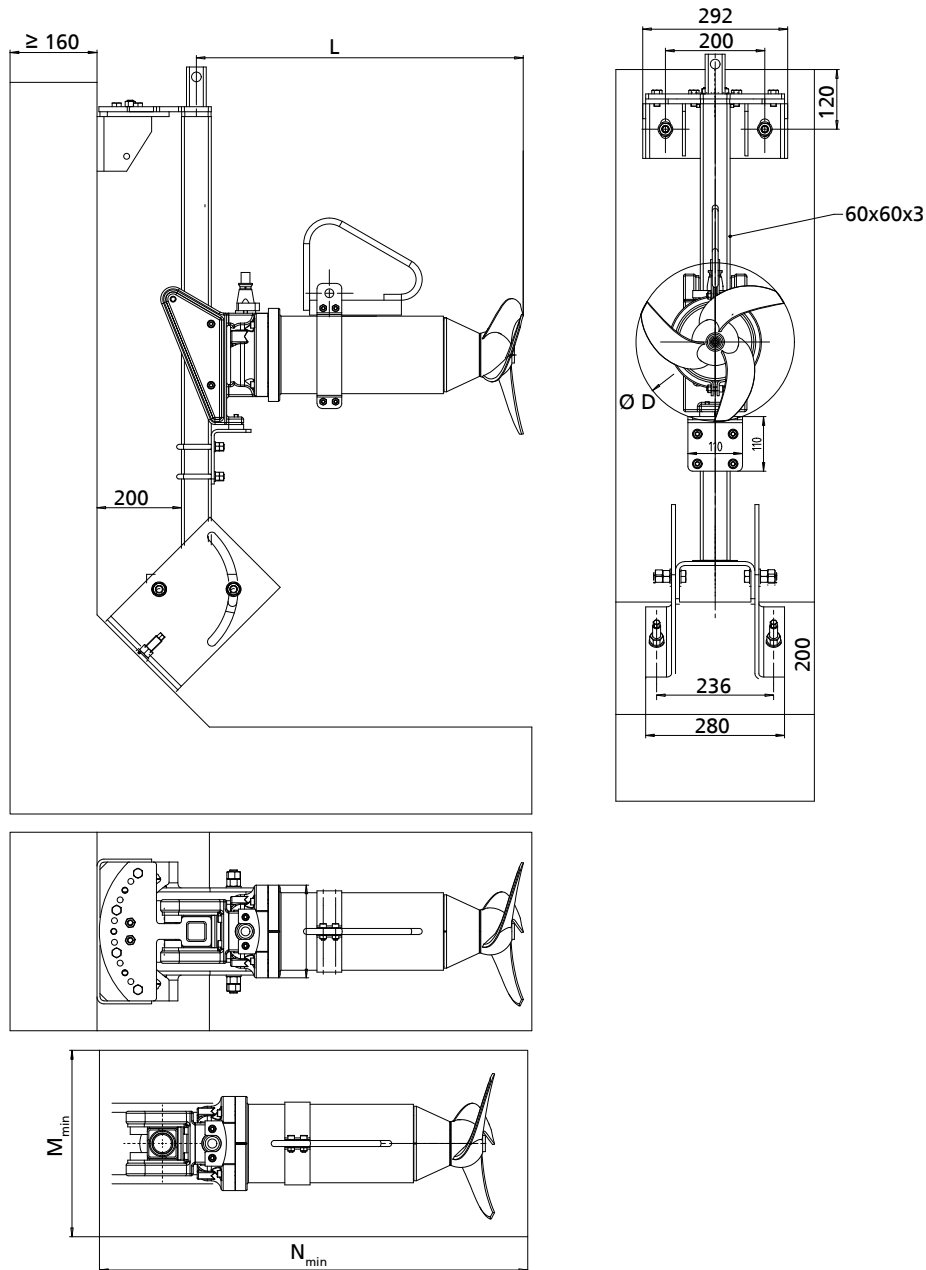

Installation with accessories set 22 - Amamix 200 / 300 / 400 (except size 4135)


Dimensions [mm]

$\varnothing D$	Motor housing material	$H_{1\ min}$	L	M_{min}	N_{min}
200	G	120	524	275	780
200	C	120	520	275	780
300	G	150	659	375	910
300	C	150	655	375	910
400	G	200	844	460	1050
400	C	200	844	460	1050

Installation with accessories set 22 - Amamix 400 (size 4135 only) / 600

 **Valid for all countries except the U.S.A.**

For mounting at the top of the tank wall and at the bottom of the tank wall or on an inclined floor (10° - 90°), level-adjustable and with horizontal swiveling option.

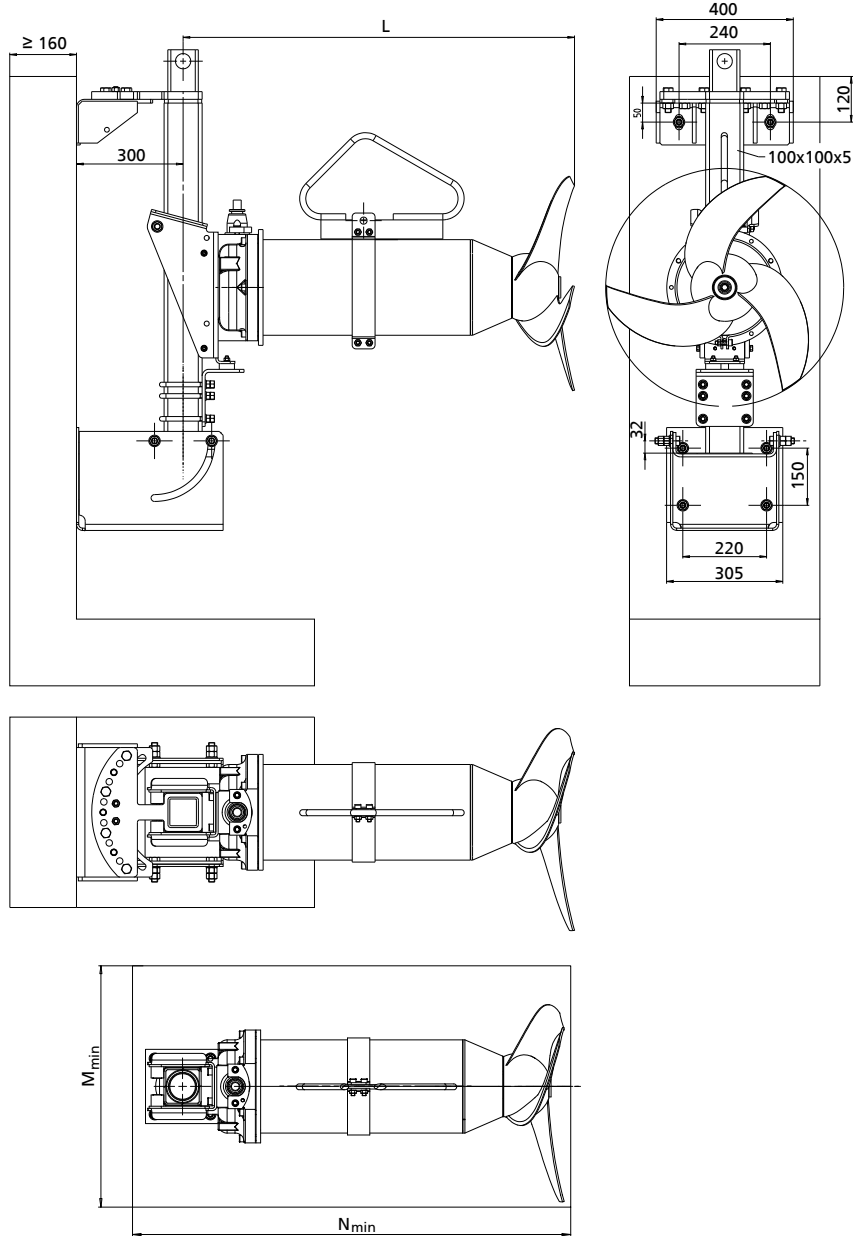

Installation with accessories set 22 - Amamix 400 (size 4135 only) / 600

Dimensions [mm]


Ø D	Motor housing material	L	M _{min}	N _{min}
400	G	783	460	1150
400	C	780	460	1150
600	G	949	700	1310
600	C	949	700	1390

**Middle support for 60 x 60 x 3 mm or 100 x 100 x 5 mm
guide rail for large installation depths**


Overview of product features

 **Valid for all countries except the U.S.A.**

Installation with accessories set 22: mounted middle support for guide rail

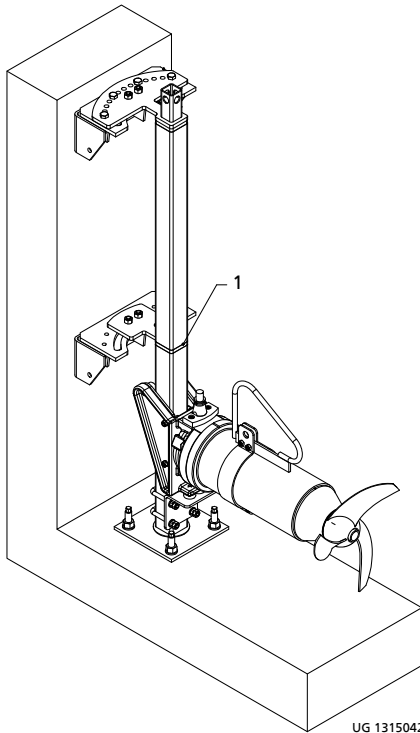

Amamix 200, 300, 400 with guide rail 60 x 60 x 3 mm

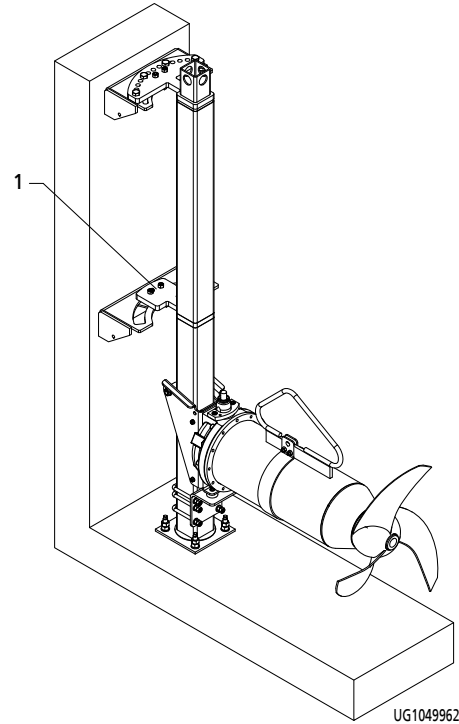

Amamix 400, 600 with guide rail 100 x 100 x 5 mm

1 Middle support

For installation depths > 6 m a middle support for the guide rail must be fitted on the tank wall. Middle supports are not required for installation depths of up to 6 m. However, if the set jet direction and tank wall reflections result in increased forces acting on the guide rail and upper and lower holders, a middle support must be fitted.


Overview of standard accessories set 22: middle support

Description	Amamix								Material	Mat. No.	[kg]
	200		300		400		600				
	G	C	G	C	G	C	G	C			
Middle support for guide rail 60 x 60 x 3 mm, incl. 2 chemical anchors	X	X	X	X	X	X	-	-	1.4301	01306324	7.7
Middle support for guide rail 60 x 60 x 3 mm, incl. 2 chemical anchors	X	X	X	X	X	X	-	-	1.4571	01306325	7.7
Middle support for guide rail 100 x 100 x 5 mm, incl. 2 chemical anchors	-	-	-	-	X	X	X	X	1.4301	01313462	19.26
Middle support for guide rail 100 x 100 x 5 mm, incl. 2 chemical anchors	-	-	-	-	X	X	X	X	1.4571	01313463	19.26

Installation with accessories set 22 - Amamix 200 / 300 / 400 (except size 4135)

 **Valid for all countries except the U.S.A.**

Middle support for guide rail 60 x 60 x 3 mm, for large installation depths.

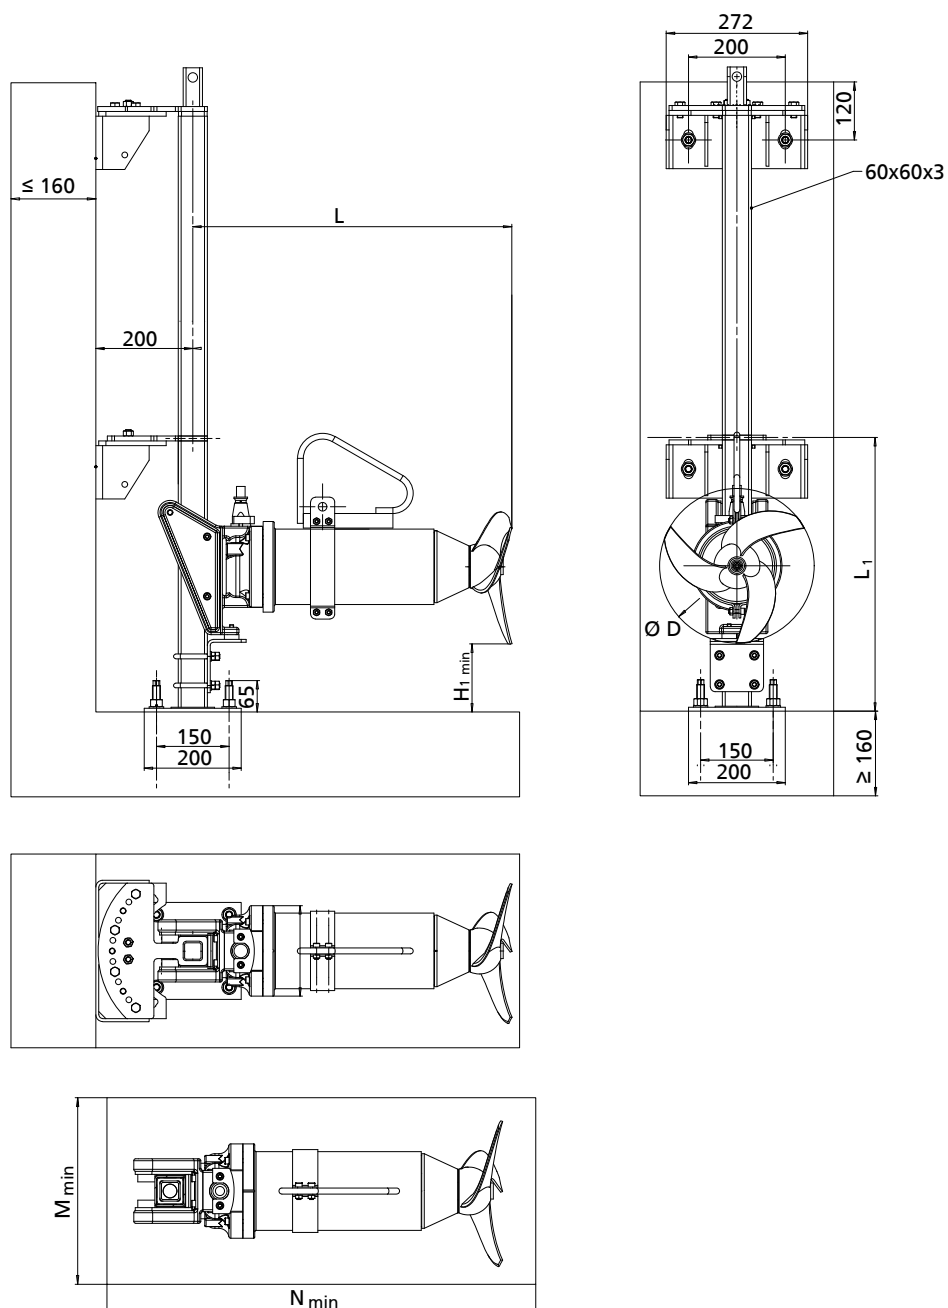

Installation with accessories set 22 - Amamix 200 / 300 / 400 (except size 4135)


Dimensions [mm]

Ø D	Motor housing material	H _{1 min}	L	M _{min}	N _{min}
200	G	120	524	275	780
200	C	120	520	275	780
300	G	150	659	375	910
300	C	150	655	375	910
400	G	200	844	460	1050
400	C	200	844	460	1050

Installation with accessories set 22 - Amamix 400 (size 4135 only) / 600

 **Valid for all countries except the U.S.A.**

Middle support for guide rail 100 x 100 x 5 mm, for large installation depths.

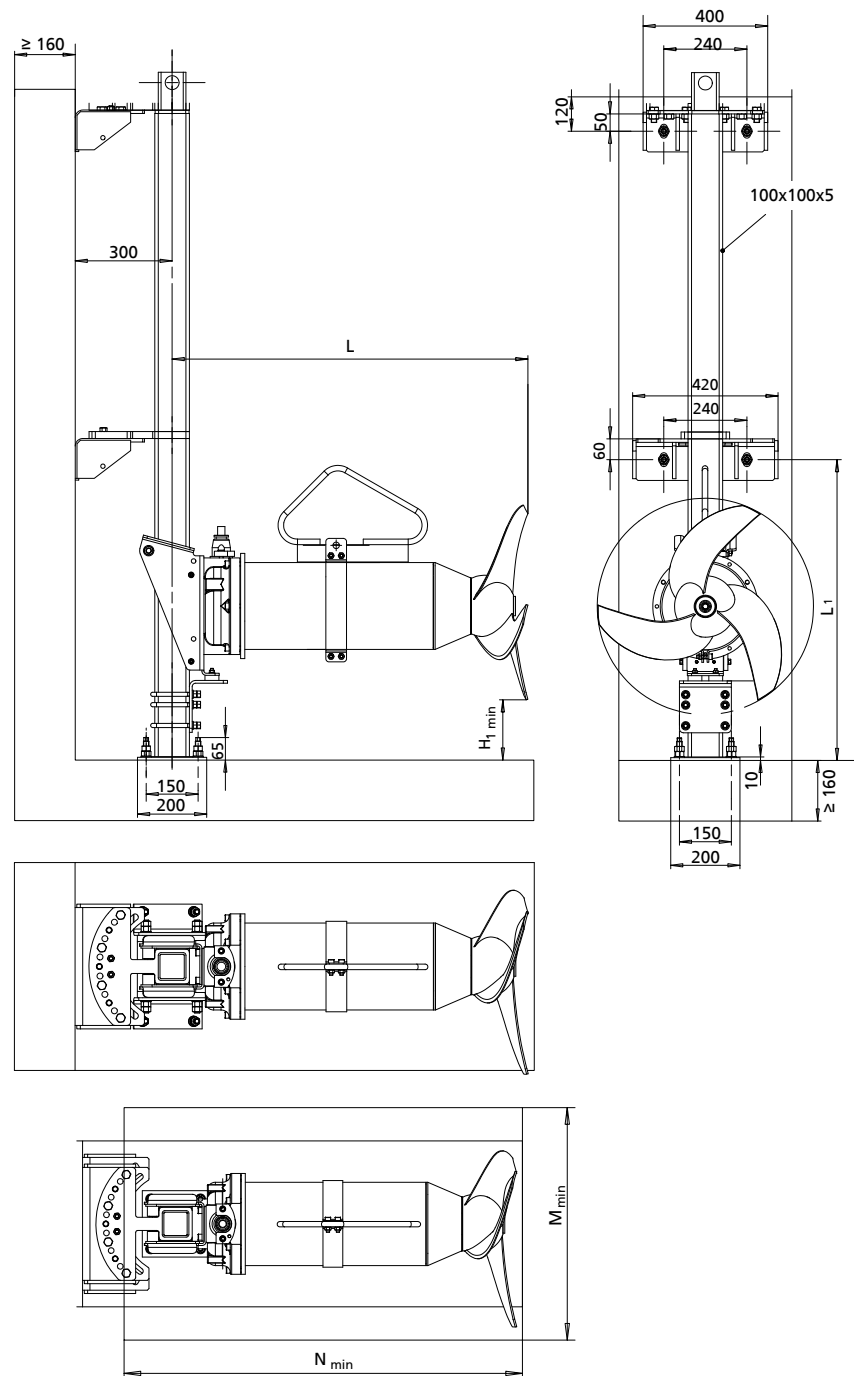

Installation with accessories set 22 - Amamix 400 (size 4135 only) / 600

Dimensions [mm]

Ø D	Motor housing material	H _{1 min}	L _{max}	M _{min}	N _{min}
400	G	205	783	460	1150
400	C	205	780	460	1150
600	G	315	949	700	1310
600	C	315	949	700	1390

Pitch adapter

General information

The guide bracket for the guide rail does not allow an inclined mixer position relative to the guide rail axis.

For duties requiring an upward or downward inclination of the submersible mixer a pitch adapter is required. The pitch adapter is fitted between the motor housing cover and the guide bracket. It enables the requisite inclination of the submersible mixer axis in increments of 10°, from 40° upwards to 40° downwards.

Exception:

Amamix 200 C/G - max. downward pitch of 10°⁶⁷⁾

Amamix 600 C - max. upward or downward pitch of 30°

Amamix 600 G - max. upward or downward pitch of 15° or 30°⁶⁸⁾

Amamix 200 only allows a downward pitch of up to 10°.

On variants with a stainless steel motor housing, the pitch adapter can be mounted on the guide bracket (in material 1.4571) without any problems. On variants with a gray cast iron motor housing, the pitch adapter cannot be mounted on the guide bracket (in EN-GJL-250) of Amamix 200/300/400. The following guide brackets (in material 1.4571) must be used in this case:

Description	Amamix						Material	Mat. No.	[kg]
	200		300		400 ⁶⁹⁾				
	G	C	G	C	G	C			
Guide bracket for guide rail 60 x 60 x 3 mm	X	-	X	-	-	-	1.4571	19202241	3.4
Guide bracket for guide rail 60 x 60 x 3 mm	-	-	-	-	X	-	1.4571	01307156	7
Guide bracket for guide rail 100 x 100 x 5 mm	-	-	-	-	-	X	1.4571	19202242	8.79

When the submersible mixer is pitched downwards it may not be possible to shift the supporting clamp towards the motor housing cover far enough to still allow smooth lifting and lowering of the mixer (approx. 5° inclination of the guide bracket relative to the guide rail). In such cases, the supporting strap shown must be used (included in the pitch adapter assembly), which provides the user with a suitable attachment point. The attachment point is determined by the specified hole.

Selecting the attachment hole in the supporting strap required for downward pitch

1. Example: submersible mixer V222. / 1 4 UDG
2. V2... / 1 4 ...: see "Pitch 20°" column
3. See column "Tu": 2. L*

A supporting strap is required. Lifting tackle must be attached to the second hole from the left.

The power cable is protected against damage (chafing) by the supplied cable sleeve and cable ties.

⁶⁷⁾ With Amamix 200, the maximum pitch is 10°, as the motor housing is relatively short and does not allow an optimum position of the supporting strap. A pitch angle of 20°/30°/40° can be achieved with a specially designed supporting clamp (on request).


⁶⁸⁾ The pitch direction (upward or downward) must always be specified in the purchase order.

⁶⁹⁾ Except size 4132


Overview of product features

 Valid for all countries except the U.S.A.

Amamix 200, 300, 400 (motor housing material gray cast iron, stainless steel)
Amamix 600 (motor housing material stainless steel)

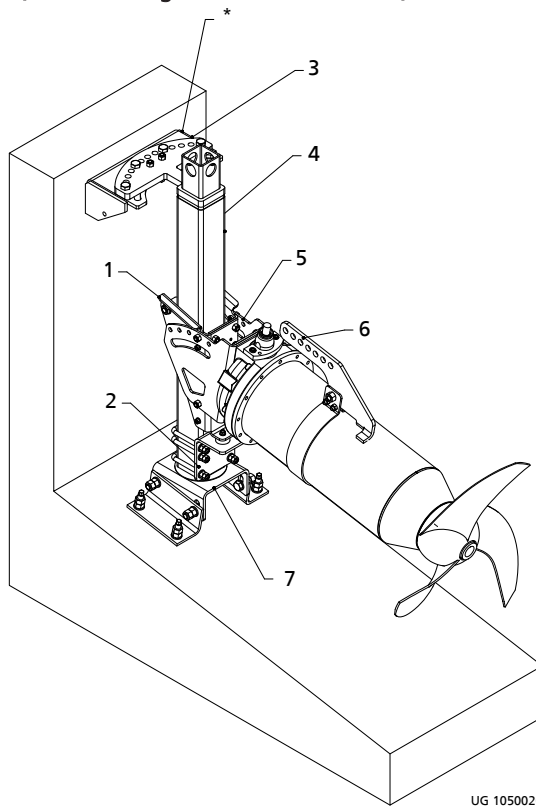


Mounted on sloping tank floor (0.5° - 10°) with pitch adapter fitted between guide bracket and motor housing cover (downward pitch)

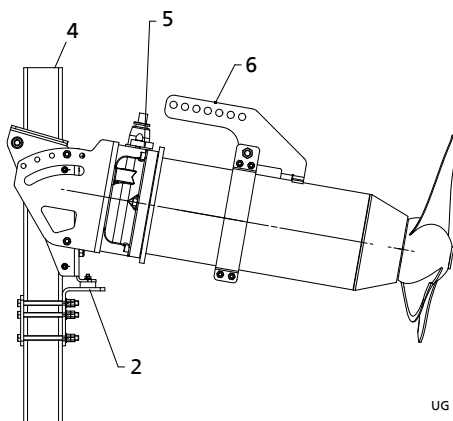

Side view/isometric view

Amamix 600 (motor housing material gray cast iron)

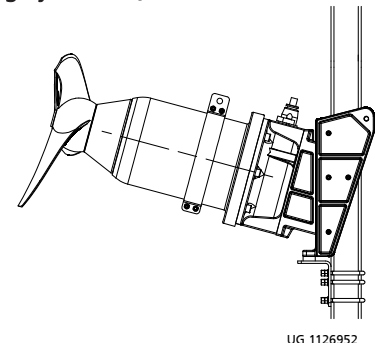

Installation example: 15° upward pitch

*	Swiveling option through 45° to the left and right around the guide rail axis (in increments of 7.5°)	4	Guide rail
1	Guide bracket	5	Pitch adapter
2	Retaining bracket	6	Supporting strap ⁷⁰⁾
3	Upper holder	7	Lower guide rail holder

⁷⁰⁾ The supporting strap is required for downward pitch only.


Overview of pitch adapters

Description	Amamix								Material	Mat. No.	[kg]
	200		300		400		600				
	G	C	G	C	G	C	G	C			
Pitch adapter	X	X	X	X	X	X	-	-	1.4571	19554654	4
	-	-	-	-	X ⁷¹⁾	X ⁷¹⁾	-	X ⁷²⁾	1.4571	19554656	9
	-	-	-	-	-	-	-	X ⁷³⁾	1.4571	19554655	9
	-	-	-	-	-	-	X ⁷⁴⁾	-	EN-GJL-250	01137874	12.64
	-	-	-	-	-	-	X ⁷⁵⁾	-	EN-GJL-250	01137876	20.35

71) Propeller 4135 only
 72) With motor 4 12 only
 73) With motor 8 12 only
 74) 15°
 75) 30°

Installation with downward pitch adjustment

For accessories set 22 - Amamix 200 - 600

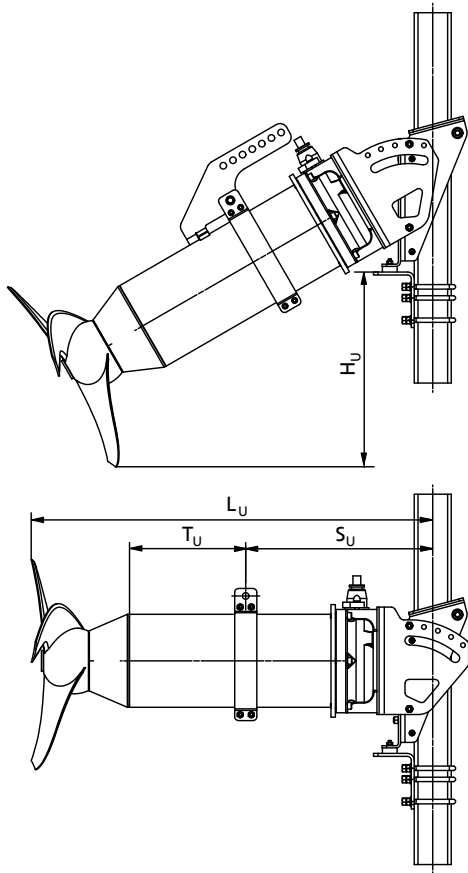

Downward pitch adjustment

Downward pitch adjustment by 0°, 10°, 20°, 30°, 40°

Size	Pitch = 0°				Pitch = 10°				Pitch = 20°				Pitch = 30°				Pitch = 40°			
	H _U	L _U	S _U	T _U	H _U	L _U	S _U	T _U	H _U	L _U	S _U	T _U	H _U	L _U	S _U	T _U	H _U	L _U	S _U	T _U
	[mm]																			
C2... / 1 4...	< 0	560	230	230	40	585	250	245	76)	76)	76)	76)	76)	76)	76)	76)	76)	76)	76)	76)
C2... / 2 4...	< 0	560	235	225	40	585	250	245	76)	76)	76)	76)	76)	76)	76)	76)	76)	76)	76)	76)
C29... / 0 6...	13	709	275	255	150	744	285	280	245	759	285	305	335	754	285	2.L	415	729	270	4.L
C32... / 2 6...	13	709	275	255	150	744	285	280	245	759	285	305	335	754	285	2.L	415	729	270	4.L
C37... / 3 8...	25	858	340	310	165	898	345	340	275	918	355	1.L	380	913	340	3.L	470	883	330	5.L
C41... / 4 8...	25	858	340	310	165	898	345	340	275	918	355	1.L	380	913	340	3.L	470	883	330	5.L
C57... / 4 12...	100	1004	400	290	305	1074	415	325	430	1114	420	360	540	1129	420	390	77)	77)	77)	77)
C63... / 8 12...	100	1129	460	350	325	1194	475	385	470	1229	475	420	600	1234	470	455	77)	77)	77)	77)


Downward pitch adjustment of 0°, 15°, 30°

Size	Pitch = 0°				Pitch = 15°				Pitch = 30°			
	H _U	L _U	S _U	T _U	H _U	L _U	S _U	T _U	H _U	L _U	S _U	T _U
	[mm]											
C57.../C63...	/ 6 12...				85	946	393	280	350	950	700	300
	/ 10 12...				85	946	393	280	350	950	700	300

76) On request only
77) Max. permissible pitch: 30°

Installation with upward pitch adjustment

For accessories set 22 - Amamix 200 - 600

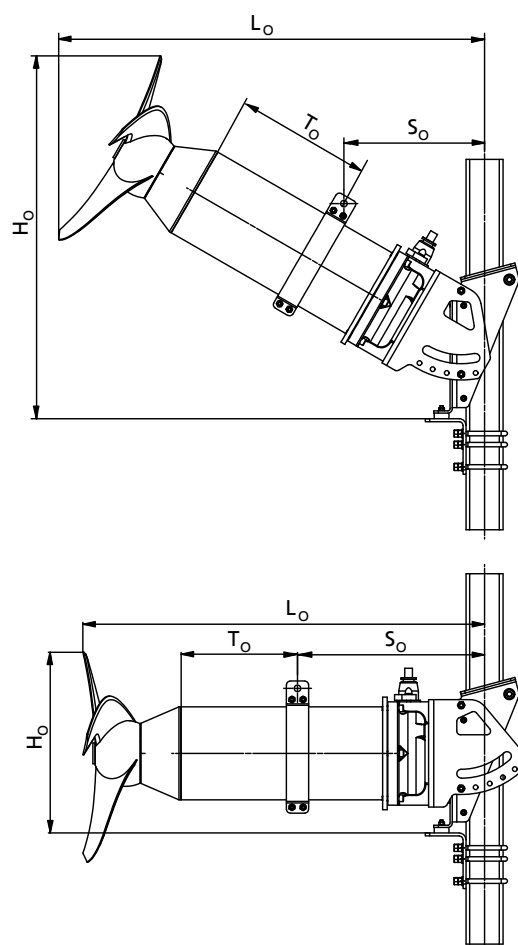

Upward pitch adjustment

Upward pitch adjustment by 0°, 10°, 20°, 30°, 40°

Size		Pitch = 0°				Pitch = 10°				Pitch = 20°				Pitch = 30°				Pitch = 40°			
		H _o	L _o	S _o	T _o	H _o	L _o	S _o	T _o	H _o	L _o	S _o	T _o	H _o	L _o	S _o	T _o	H _o	L _o	S _o	T _o
		[mm]																			
C2...	/ 1 4...	270	560	230	230	360	585	250	210	450	595	255	190	530	590	260	165	600	565	260	135
C2...	/ 2 4...	270	560	235	225	360	585	255	205	450	595	260	185	530	590	265	160	600	565	260	130
C29...	/ 0 6...	313	709	275	255	470	744	295	230	570	759	315	200	655	754	315	170	735	729	305	140
C32...	/ 2 6...	313	709	275	255	470	744	295	230	570	759	315	200	655	754	315	170	735	729	305	140
C37...	/ 3 8...	385	858	340	310	630	898	360	285	740	918	380	250	845	913	290	210	935	883	390	160
C41...	/ 4 8...	385	858	340	310	630	898	360	285	740	918	380	250	845	913	290	210	935	883	390	160
C57...	/ 4 12...	530	1004	400	290	765	1074	425	260	890	1114	440	225	1000	1129	445	185	78)	78)	78)	78)
C63...	/ 8 12...	530	1129	460	350	785	1194	485	320	930	1229	500	280	1060	1234	505	235	78)	78)	78)	78)

Upward pitch adjustment of 0°, 15°, 30°

Size		Pitch = 0°				Pitch = 15°				Pitch = 30°			
		H _o	L _o	S _o	T _o	H _o	L _o	S _o	T _o	H _o	L _o	S _o	T _o
		[mm]											
C57.../C63...	/ 6 12...	545	946	393	280	800	1079	400	250	1050	1116	360	230
	/ 10 12...	545	946	393	280	800	1079	400	250	1050	1116	360	230

78) Max. permissible pitch: 30°

Options: Amamix 200, 300 with guide bracket for guide rail 100 x 100 x 5 mm

The standard version of Amamix 200, 300 with accessories set 22 is designed for a 60 x 60 x 3 mm guide rail (new installations). If a 100 x 100 x 5 mm guide rail has been specified, or if a 100 x 100 x 5 mm guide rail is already installed (e.g. in the case of KSB replacement units), Amamix 200, 300 units can be equipped with the following guide brackets instead of the standard guide brackets:

Overview of guide brackets for Amamix 200, 300 with guide rail 100 x 100 x 5 mm

Description	Amamix				Material	Mat. No.	[kg]
	200		300				
	G	C	G	C			
Guide bracket for guide rail 100 x 100 x 5 mm	X	-	X	-	EN-GJL-250	19556701	13
Guide bracket for guide rail 100 x 100 x 5 mm	○ ⁷⁹⁾	X	○ ⁷⁹⁾	X	1.4571	19202242	8.79


The guide brackets are already provided with the holes required for fastening the Amamix 200, 300 mixer.

Guide bracket mounted on motor housing cover with socket head cap screws

Description	Qty	Thread	Tightening torque
Socket head cap screws	4	M8	17 Nm


Compared to the technical data of the standard version (guide bracket for guide rail 60 x 60 x 3 mm), the complete unit weight, incl. guide bracket and 10-meter power cable, will be increased by 9.1 kg (motor housing material gray cast iron) or 5.1 kg (motor housing material stainless steel). A heavier guide bracket also results in different dimensions and a different position of the supporting clamp.

Dimensions of guide bracket for guide rail 100 x 100 x 5 mm

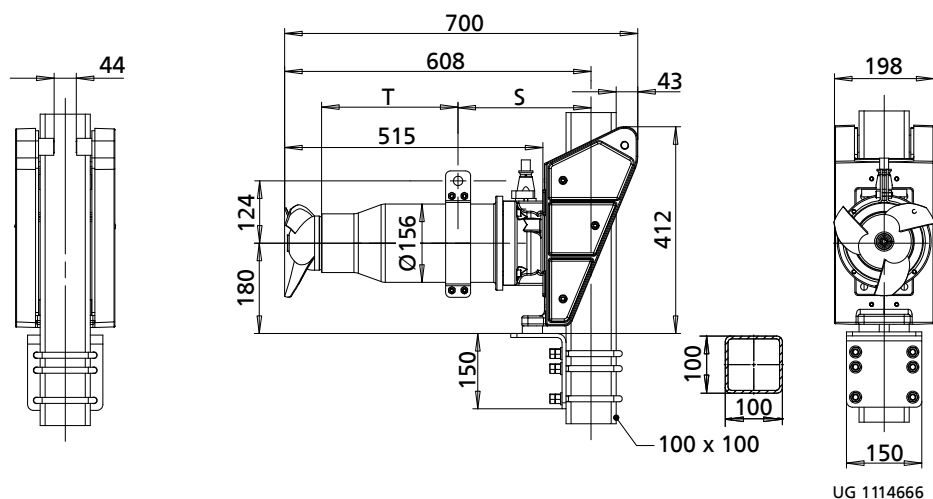


Amamix 200 G: S = 215 / T = 270, motor 1 4 = 43 kg, motor 2 4 = 43.5 kg


⁷⁹⁾ Optional

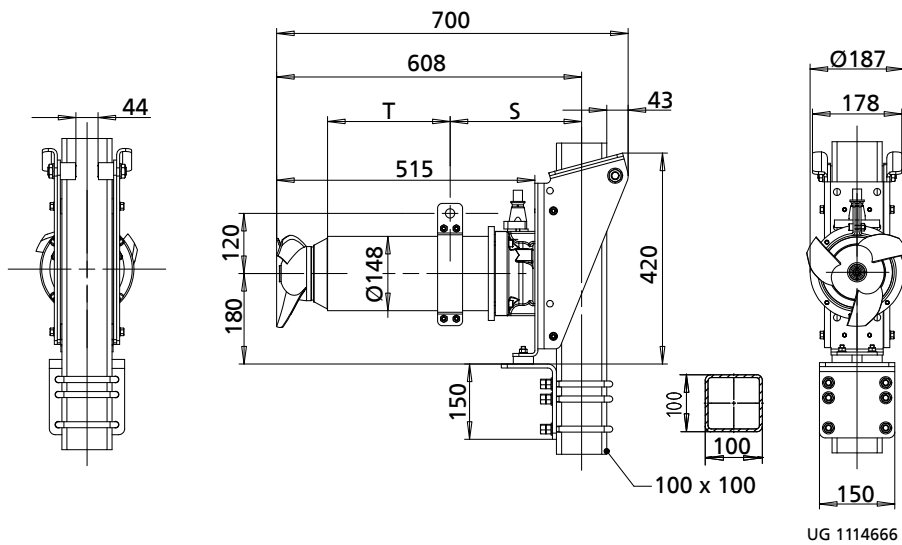

Amamix 200 C: S = 215 / T = 240 (motor 1 4) S = 220 / T = 235 (motor 2 4), motor 1 4 = 36.5 kg, motor 2 4 = 39 kg

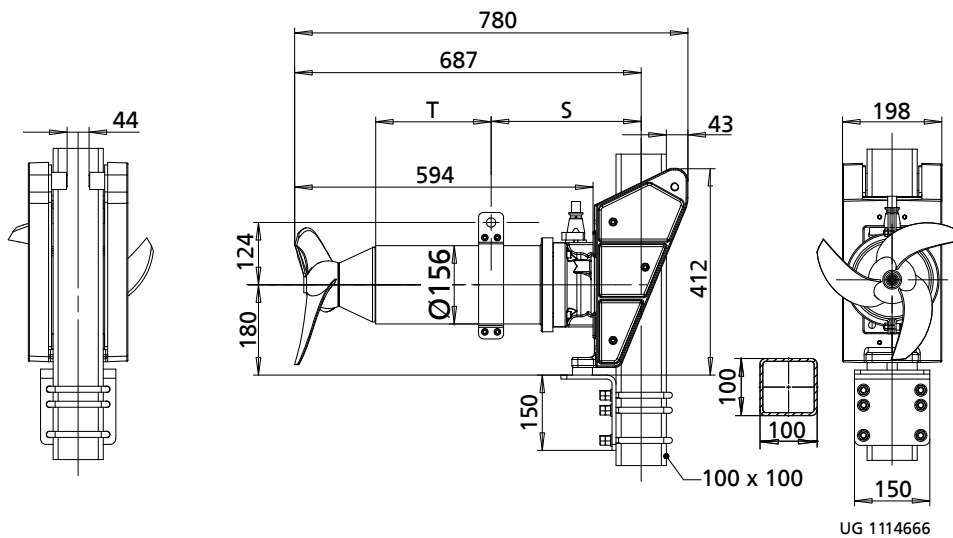



Amamix 300 G: S = 265 / T = 260, motor 0 6 / 2 6 = 55 kg

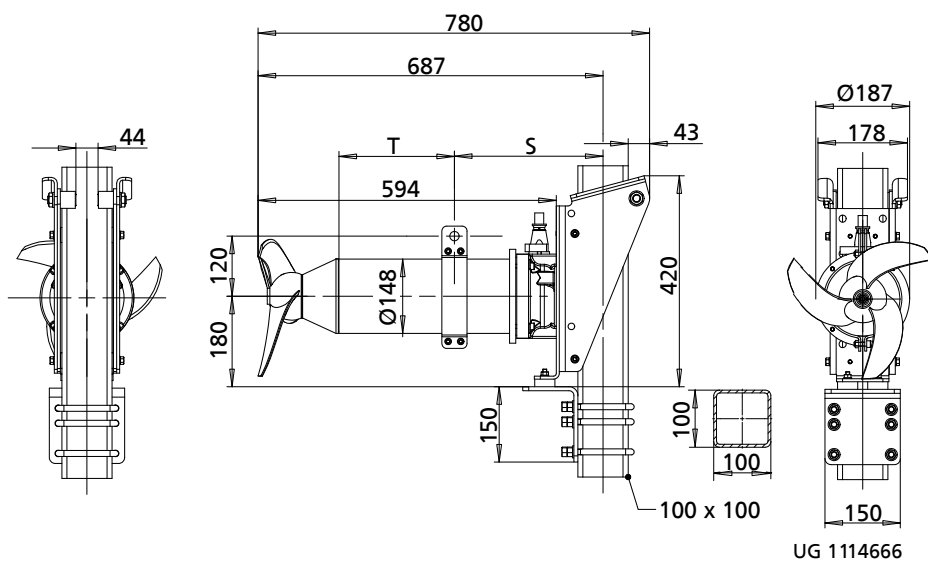

Amamix 300 C: S = 265 / T = 260, motor 0 6 / 2 6 = 48.5 kg

Forcing screws


Forcing screws

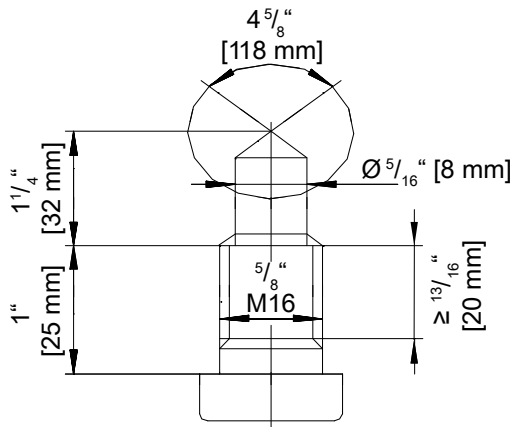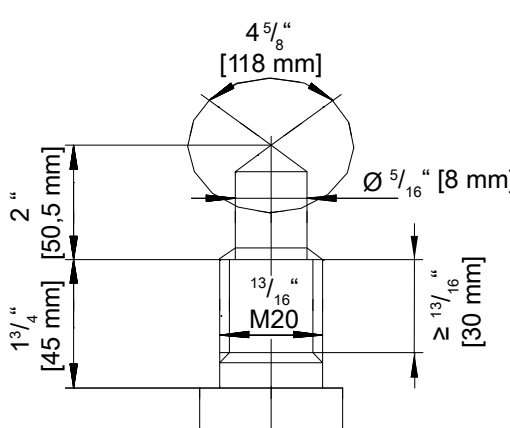Size	Forcing screw		Mat. No.	[kg]
200	M16 x 60		11197135	0,1
300			11197135	0,1
400			11197135	0,1
600	M20 x 95		11197784	0,25


Guide rails

 Valid for all countries except the U.S.A.

Overview of guide rails



Guide rail 60 x 60 x 3 mm



Guide rail 100 x 100 x 5 mm

Overview of guide rails

Description	Length	Amamix								Material	Mat. No.	[kg]
		200		300		400		600				
	[m]	G	C	G	C	G	C	G	C			
Guide rail 60 x 60 x 3 mm	1,5	X	X	X	X	X	X	-	-	1.4301	11307851	7.85
Guide rail 60 x 60 x 3 mm	1,5	X	X	X	X	X	X	-	-	1.4571	11307852	7.85
Guide rail 60 x 60 x 3 mm	3,0	X	X	X	X	X	X	-	-	1.4301	11304010	15.7
Guide rail 60 x 60 x 3 mm	3,0	X	X	X	X	X	X	-	-	1.4571	11304011	15.7
Guide rail 60 x 60 x 3 mm	6,0	X	X	X	X	X	X	-	-	1.4301	11304596	31.3
Guide rail 60 x 60 x 3 mm	6,0	X	X	X	X	X	X	-	-	1.4571	11304597	31.3
Guide rail 100 x 100 x 5 mm	3,0	-	-	-	-	X	X	X	X	1.4301	11304598	43.2
Guide rail 100 x 100 x 5 mm	3,0	-	-	-	-	X	X	X	X	1.4571	11304599	43.2
Guide rail 100 x 100 x 5 mm	6,0	-	-	-	-	X	X	X	X	1.4301	11304600	86.4
Guide rail 100 x 100 x 5 mm	6,0	-	-	-	-	X	X	X	X	1.4571	11304601	86.4

Cable support/carabiner

Cable support

The cable support is used for supporting the power cable at the lifting rope or tank edge (one included in standard scope of supply; additional or spare cable supports optionally available).


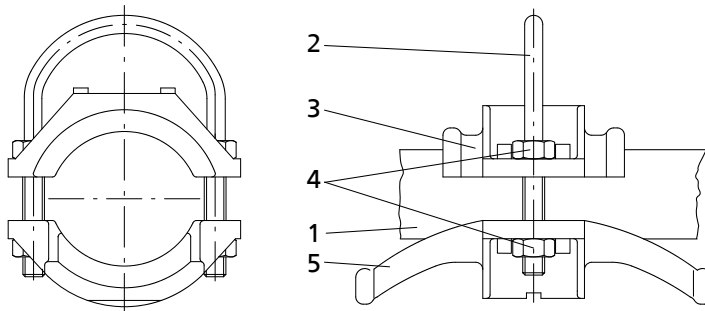


Illustration of cable support

1	Diameter of power cable ⁸⁰⁾
2	Bail
3	Polypropylene
4	Hexagon nut made of A4
5	Polypropylene

Carabiner

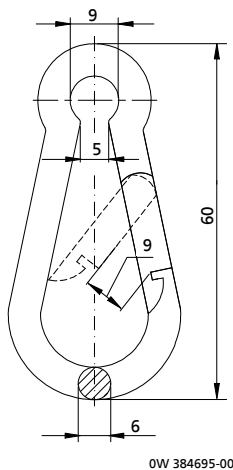

Dimensions of carabiner [mm]

Overview of cable supports/carabiners

Description	Suitable for	Material	Material No.	[kg]
Cable support, incl. carabine hook	Motors 1 4, 2 4, 3 4 (power cable diameters: Ø = 10 ... 16 mm)	Plastic / A4, carabine hook: A4	19555522	0.06
Cable support, incl. carabine hook	Motors 4 4, 5 4, 11 4, 16 4, 23 4 (power cable diameters: Ø = 17 ... 25 mm)	Plastic / A4, carabine hook: A4	19555523	0.09

⁸⁰⁾ Refer to the power cable data given in the motor catalog.


Accessories (valid for the U.S.A.)

Accessories set 6

Overview of product features

Valid for the U.S.A.

For permanent mounting of the submersible mixer on the tank floor.

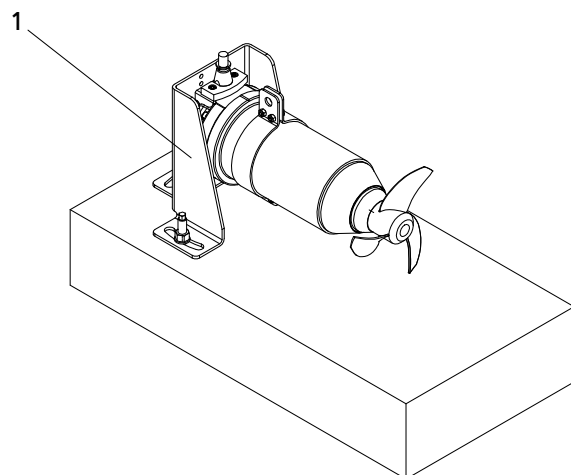

Installation using accessories set 6: permanent mounting of submersible mixer on tank floor

1	Submersible mixer stand
---	-------------------------


Overview of accessories set 6

Description	Amamix				Material	Mat. No.	[lbs]
	200	300	400	600			
Submersible mixer stand (for use in tanks which can be drained to provide access to the submersible mixer, e.g. for maintenance and inspection purposes, e.g. stormwater relief structures) incl. 3 chemical anchors for mounting the submersible mixer stand on the tank floor, min. concrete quality C25/30	X	X	.81)	.48)	A 276 Type 304	01109062	17.5
					A 276 Type 316 Ti	19556921	17.5

81) On request

Installation with accessories set 6 - Amamix 200 / 300

For permanent mounting on the tank floor
(sizes 400 and 600 on request)

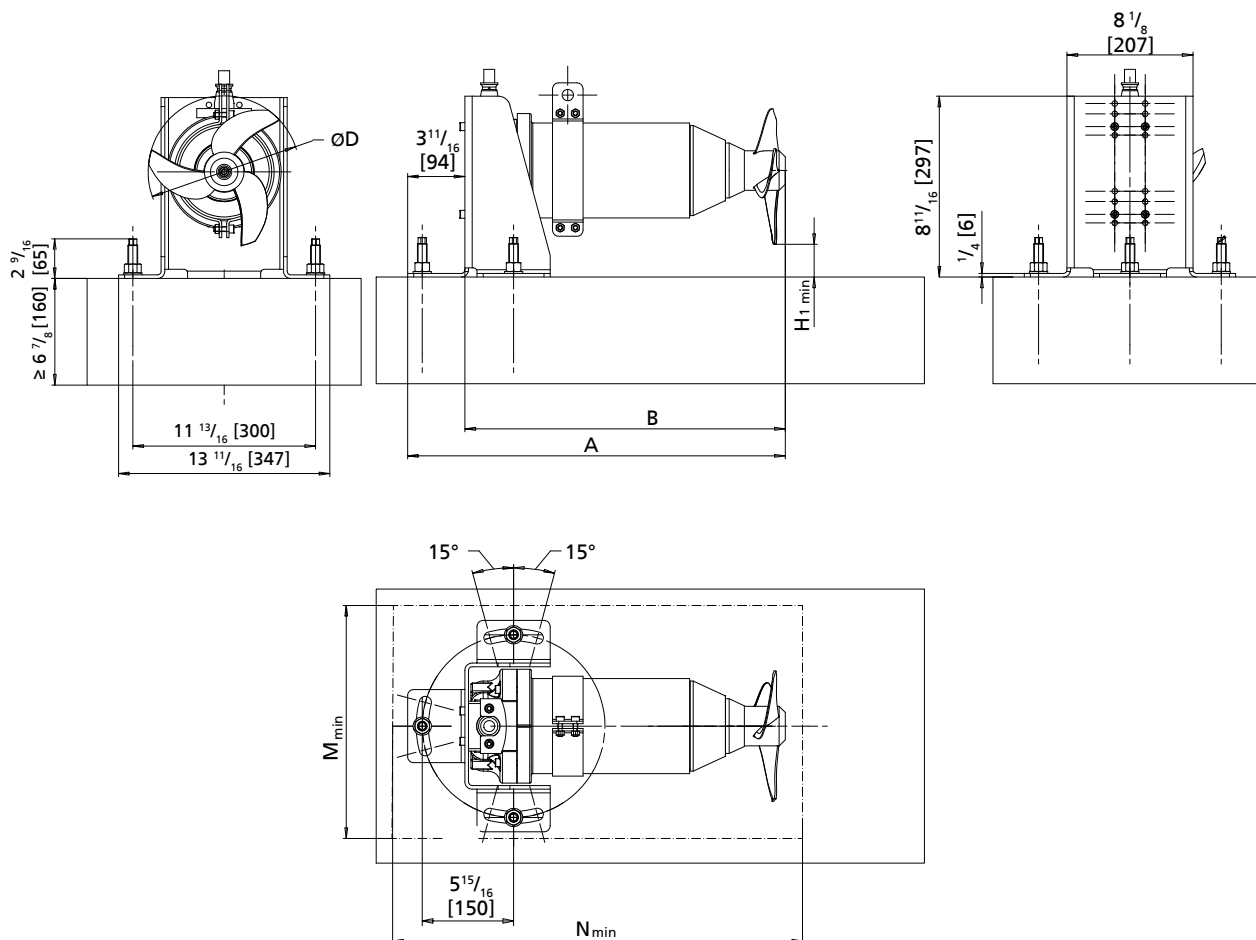

Installation with accessories set 6 - Amamix 200 / 300 ["/mm]

Dimensions [mm]

$\varnothing D$ [mm]	$H_{1 \min}$ [mm]	A [mm]	B [mm]	$M_{\min}$ [mm]	$N_{\min}$ [mm]
200	48,5	560	466	400	610
300	50	694	600	400	750

Scope of supply

Depending on the model, the following items are included in the scope of supply:

Accessories of accessories set 6

- Stand for floor mounting



- Chemical anchors



Accessories of accessories set 7

- Chemical anchors



- Guide rail with guide rail extension if required



- Lower holder for mounting on the sump/tank wall or benching



- Upper holder



- Retaining bracket



- Guide bracket Version C or version G, usually supplied fitted to the mixer



Accessories of accessories set 22


- Chemical anchors



- Guide rail with guide rail extension if required



- Lower holder for mounting on a horizontal tank floor (0° - 0.5°) Version 60 x 60 or 100 x 100 mm



- Lower holder for mounting on a sloping tank floor (0.5° - 10°)




- Lower holder for mounting on an inclined tank floor or on the sump/tank wall (10° - 90°)




- Upper holder Version 60 x 60 mm or 100 x 100 mm



- Retaining bracket Version 60 x 60 mm or 100 x 100 mm



- Guide bracket Version C, version G, usually supplied fitted to the mixer



Special accessory - Middle support for guide rail



Special accessory - Supporting strap

Fastened to the mixer via the supporting clamp if a pitch adapter is used; usually fitted at the factory (included in the pitch adapter assembly)



Special accessory - Bail

Fastened to the mixer via the supporting clamp; usually fitted at the factory



Special accessory - Pitch adapter

Usually fitted between the motor housing cover and the guide bracket at the factory


**Special accessory - Pitch adapter for Amamix 600 G**

Always fitted between the motor housing cover and the guide bracket at the factory



General assembly drawings with list of components

Amamix 200 - motor housing material gray cast iron

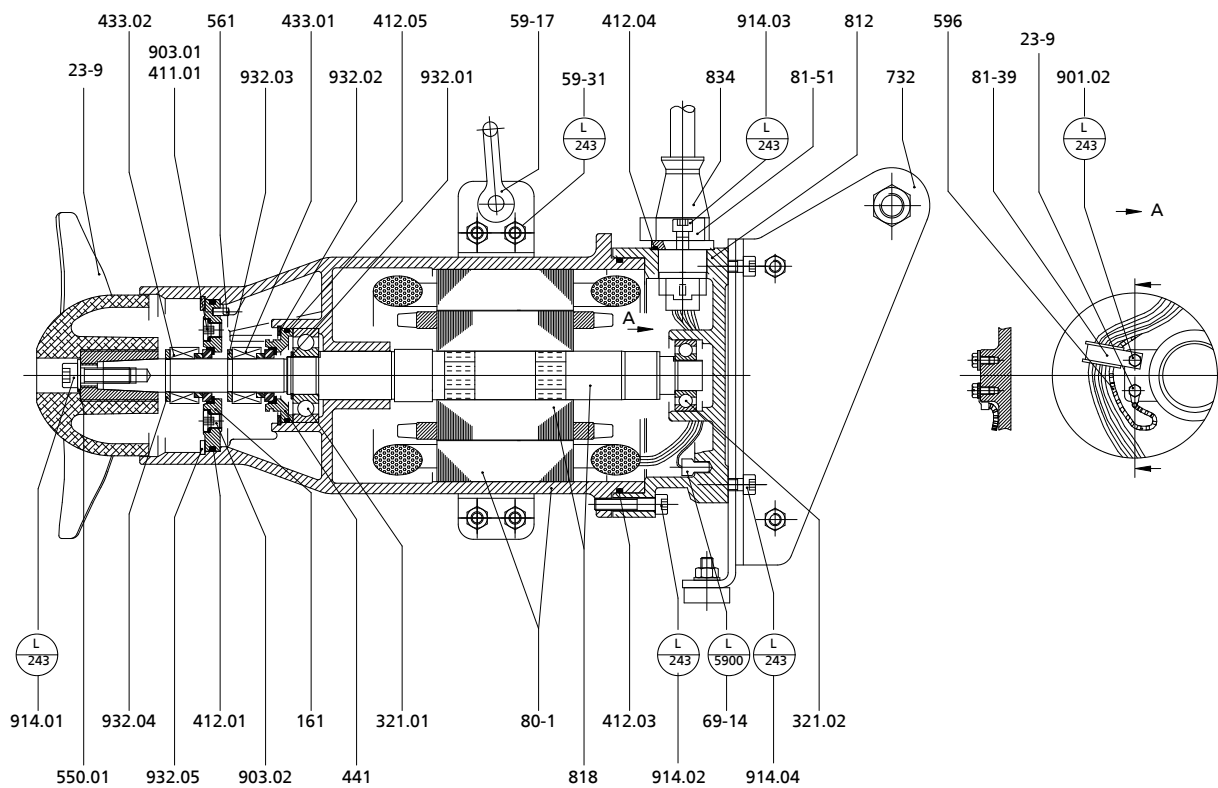


General assembly drawing Amamix 200, motor housing material gray cast iron

List of components Amamix 200, motor housing material gray cast iron

Part No.	Description	Part No.	Description
161	Casing cover	732	Guide bracket (accessory)
23-9	Axial propeller	80-1	Motor unit
321	Radial ball bearing	81-39	Clamp
411	Joint ring	81-51	Clamping sleeve
412	O-ring	812	Motor housing cover
433	Mechanical seal	818	Rotor
441	Shaft seal housing	834	Cable gland
550	Disc	901	Hexagon head bolt
561	Grooved pin	903	Screw plug
59-17	Shackle	914	Hexagon socket head cap screw
59-31	Supporting clamp	930	Safety device
596	Wire (ground connection)	932	Circlip
69-14	Leakage monitor		

Amamix 200 - motor housing material stainless steel

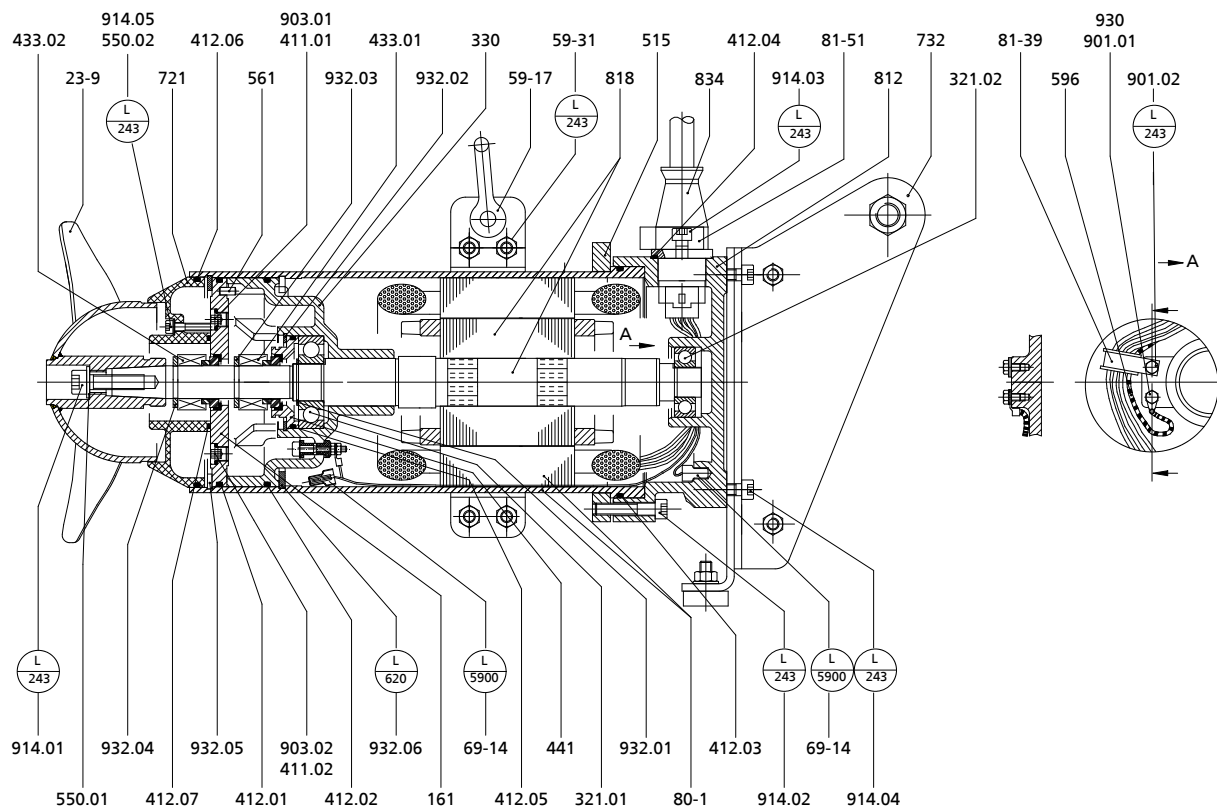


General assembly drawing Amamix 200, motor housing material stainless steel

List of components Amamix 200, motor housing material stainless steel

Part No.	Description	Part No.	Description
161	Casing cover	69-14	Leakage monitor
23-9	Axial propeller	721	Adapter
321	Radial ball bearing	732	Guide bracket (accessory)
330	Bearing bracket	80-1	Motor unit
411	Joint ring	81-39	Clamp
412	O-ring	81-51	Clamping sleeve
433	Mechanical seal	812	Motor housing cover
441	Shaft seal housing	818	Rotor
515	Locking ring	834	Cable gland
550	Disc	901	Hexagon head bolt
561	Grooved pin	903	Screw plug
59-17	Shackle	914	Hexagon socket head cap screw
59-31	Supporting clamp	930	Safety device
596	Wire	932	Circlip

Amamix 300/400/600 - motor housing material gray cast iron

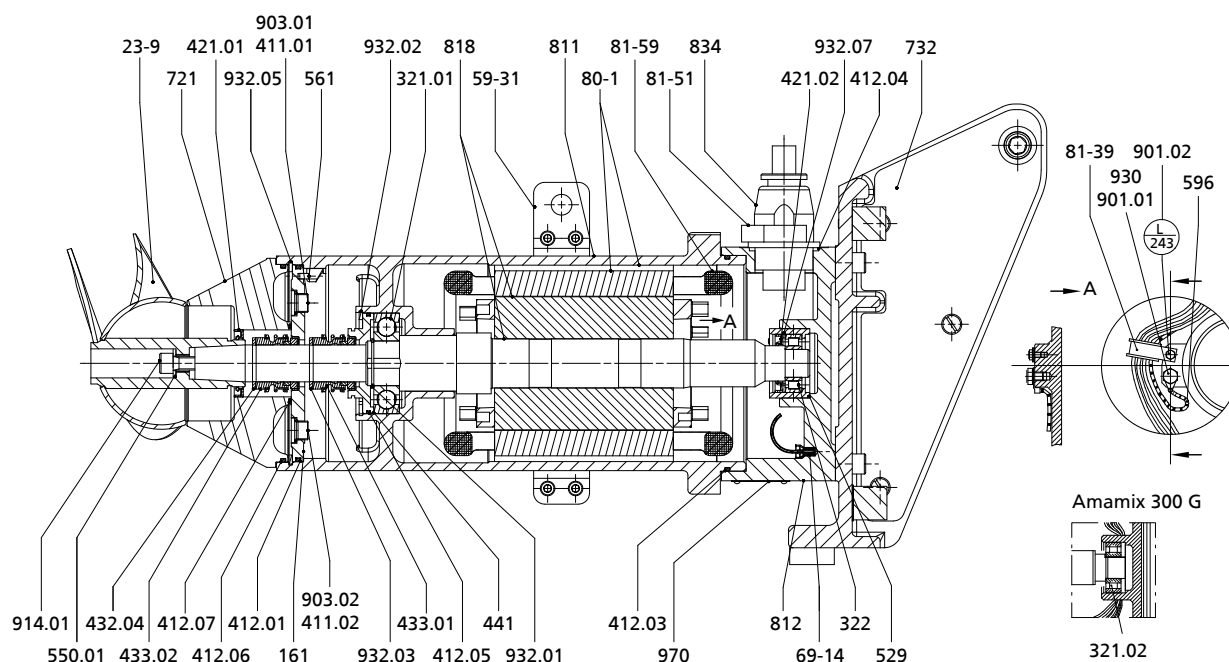


General assembly drawing Amamix 300/400/600, motor housing material gray cast iron

List of components Amamix 300/400/600, motor housing material gray cast iron

Part No.	Description	Part No.	Description
161	Casing cover	721	Adapter
23-9	Axial propeller	732	Guide bracket (accessory)
321	Radial ball bearing	80-1	Motor unit
322	Radial roller bearing	81-51	Clamping sleeve
411	Joint ring	81-59	Stator
412	O-ring	811	Motor housing
421	Lip seal	812	Motor housing cover
433	Mechanical seal	818	Rotor
441	Shaft seal housing	834	Cable gland
529	Bearing sleeve	901	Hexagon head bolt
550	Disc	903	Screw plug
561	Grooved pin	914	Hexagon socket head cap screw
59-31	Supporting clamp	930	Safety device
596	Wire (ground connection)	932	Circlip
69-14	Leakage monitor	970	Label/plate

Amamix 300/400/600 - motor housing material stainless steel

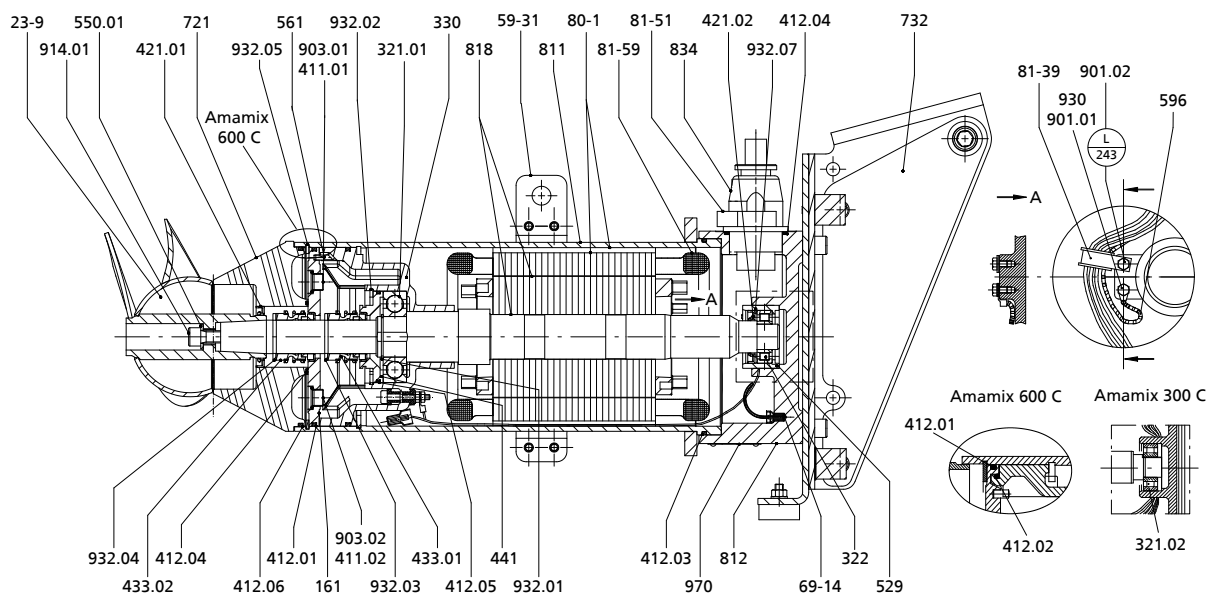

General assembly drawing Amamix 300/400/600, motor housing material stainless steel

List of components Amamix 300/400/600, motor housing material stainless steel

Part No.	Description	Part No.	Description
161	Casing cover	721	Adapter
23-9	Axial propeller	732	Guide bracket (accessory)
321	Radial ball bearing	80-1	Motor unit
322	Radial roller bearing	81-39	Clamp
330	Bearing bracket	81-51	Clamping sleeve
411	Joint ring	81-59	Stator
412	O-ring	811	Motor housing
421	Lip seal	812	Motor housing cover
433	Mechanical seal	818	Rotor
441	Shaft seal housing	834	Cable gland
529	Bearing sleeve	901	Hexagon head bolt
550	Disc	903	Screw plug
561	Grooved pin	914	Hexagon socket head cap screw
59-31	Supporting clamp	930	Safety device
596	Wire (ground connection)	932	Circlip
69-14	Leakage monitor	970	Label/plate

Selection of Submersible Mixers

To: KSB Aktiengesellschaft
Turmstraße 92
06110 Halle/Saale (Germany)
Abt.: P&A Tauchmotorrührwerke

Tel.: +49 (345) 4826-4627

Fax: +49 (345) 4826-4694

From:

Project:

Data for selection

Fluid

Description:	
Solids content:	 %
Temperature:	 °C
Density:	 kg/m ³
Viscosity:	 m Pa s
Loss on ignition:	 %
Explosion protection:	☐ Yes ☐ No

Flow behavior:

☐ Newtonian	☐ Pseudoplastic	☐ Thixotropic
☐ Other:		

Thickening method

☐ Static	☐ Mechanical:	
	☐ Screening drum	
	☐ Centrifuge	
Application of polymers:	☐ Yes	☐ No

Installation parts

☐ 1.4571	☐ 1.4301
---------------------------------	---------------------------------

Installation parts

☐ Floor mounting (accessories set 6)	☐ 1.4301	☐ 1.4571
☐ Pump sump (accessories set 7)	☐ 1.4301	☐ 1.4571
☐ Tank (accessories set 22)	☐ 1.4301	☐ 1.4571
☐ Guide rail (accessories sets 7 and 22)	☐ 1.4301	☐ 1.4571

Material of lifting equipment (crane)

☐ Galvanized steel	☐ 1.4301
☐ Aluminum	

Aeration

Floor aeration:		
☐ Pipe diffusers	☐ Disc diffusers	☐ Plate diffusers
☐ Other:		
Air supply:		

Tank/reservoir

Material:		
☐ Concrete	☐ Steel	☐ Stainless steel
☐ Plastic	☐ Steel, enameled	
Coating:		
Design:	☐ Covered	☐ Open
Tank geometry:		
☐ Round	☐ Ring channel	☐ Square
☐ Rectangular	☐ Square	☐ Racetrack ⁸²⁾
☐ Other:		
Dimensions:		
Length:	 m	
Width:	 m	
Outside diameter:	 m	
Inside diameter ⁸³⁾ :	 m	
Fill level:	 m	
Tank depth:	 m	

Comment

[illegible]

82) Please enclose a drawing or sketch.

83) For ring channel tanks only



KSB, Inc.

4415 Sarellen Road • Richmond, VA 23231

Phone: (804) 222-1818 • Fax: (804) 226-6961 • www.ksbusa.com

KSB PUMPS Inc.

5885 Kennedy Road • Mississauga • Ontario L 4Z 2G3

Phone: (905) 568-9200 • Fax: (905) 568-3740 • www.ksb.ca