

Sheet Metal Pump and SS Motor Performance - CORAChrom 100 - 2

Pump Type	Motor rating		Cable size	Starting method		Discharge m³/hr.							
- 2	kW	HP	mm²		Head (m)	0	0.40	0.80	1.20	1.60	2.0	2.40	2.70
06	0.37	0.5	1.5	DOL		36	35	33	31	27	23	17	10
09	0.37	0.5	1.5	DOL		54	53	50	46	41	35	25	15
13	0.75	1.0	1.5	DOL		78	76	72	66	59	51	36	22
18	0.75	1.0	1.5	DOL		108	105	100	92	81	70	50	30
23	1.10	1.5	1.5	DOL		138	134	128	118	104	89	64	38
28	1.50	2.0	2.5	DOL		168	163	156	143	126	109	78	47
33	1.50	2.0	2.5	DOL		198	193	183	169	149	128	92	55
40	2.20	3.0	2.5	DOL		240	233	222	204	180	156	111	67
48	2.20	3.0	2.5	DOL		288	280	267	245	216	187	133	80
55	3.00	4.0	2.5	DOL		330	321	306	281	248	214	153	92
65	3.00	4.0	2.5	DOL		390	279	361	332	293	253	181	108
75	3.70	5.0	2.5	DOL		450	438	417	383	338	292	208	125
90	4.50	6.0	2.5	DOL	540	525	500	460	405	350	250	150	

Sheet Metal Pump and SS Motor Performance - CORAChrom 100 - 3

Pump Type	Motor rating		Cable size	Starting method		Discharge m³/hr.							
- 3	kW	HP	mm²		Head (m)	0	0.40	1.2	2.0	2.8	3.2	3.6	4.0
06	0.37	0.50	1.5	DOL		37	37	35	32	29	26	22	18
09	0.55	0.75	1.5	DOL		56	55	52	48	43	39	33	27
12	0.75	1.00	1.5	DOL		75	74	70	64	58	52	44	36
15	1.10	1.50	1.5	DOL		93	92	87	81	72	65	56	45
18	1.10	1.50	1.5	DOL		112	110	104	97	86	78	67	54
22	1.50	2.00	2.5	DOL		137	135	128	118	106	95	81	66
25	1.50	2.00	2.5	DOL		155	153	145	134	120	108	93	75
29	2.20	3.00	2.5	DOL		180	178	168	156	139	126	107	87
33	2.20	3.00	2.5	DOL		205	202	191	177	158	143	122	99
39	3.00	4.00	2.5	DOL		242	239	226	209	187	169	144	117
45	3.00	4.00	2.5	DOL		280	276	261	242	216	195	167	135
52	3.70	5.00	2.5	DOL		323	319	302	279	250	225	192	156
60	4.50	6.00	2.5	DOL	373	368	348	322	288	260	222	180	

Sheet Metal Pump and SS Motor Performance - CORAChrom 100 - 5

Pump Type	Motor rating		Cable size	Starting method		Discharge m³/hr.							
- 5	kW	HP	mm²		Head (m)	0	1.0	2.0	3.0	4.0	5.0	6.0	7.0
04	0.37	0.50	1.5	DOL		25	24	22	21	19	16	11	8
06	0.55	0.75	1.5	DOL		37	36	34	31	28	24	16	12
08	0.75	1.00	1.5	DOL		50	48	45	42	38	32	21	16
12	1.10	1.50	1.5	DOL		74	72	67	62	56	48	32	24
17	1.50	1.50	1.5	DOL		105	102	95	88	80	68	45	34
21	2.20	3.00	2.5	DOL		130	125	118	109	99	84	56	42
25	2.20	3.00	2.5	DOL		155	149	140	130	117	100	67	50
33	3.00	4.00	2.5	DOL		205	197	185	172	155	132	88	66
38	3.70	5.00	2.5	DOL		236	227	213	198	178	152	101	76
44	4.50	6.00	2.5	DOL		273	263	246	229	207	176	117	88
52	5.50	7.50	2.5	DOL		322	311	291	270	244	208	139	104
60	5.50	7.50	2.5	DOL		372	358	336	312	282	240	160	120
75	7.50	10.00	2.5	DOL		465	448	420	390	352	300	200	150
85	7.50	10.00	6.0	S. D.		527	508	476	442	399	340	227	170



KSB Limited
Standard Pumps Division
Plot No. E-3 & E-4, MIDC Sinnar, Nashik - 422 113.
Tel.: +91-2551-230252 / 253, 229700 www.ksbindia.co.in

Our toll free no : 1800 233 1299
(Mon-Sat. 8am to 10pm)

Mktg. Services /03-19/2000

Our technology. Your success.
Pumps ▪ Valves ▪ Service



Sheet Metal Pumps
CORAChrom



Subject to technical modification without prior notice.

Sheet Metal Pumps:

KSB Sheet Metal Pumps are developed with latest design and manufacturing techniques; which makes the product reliable, efficient and hygienic.

The pumps are developed to withstand the tougher and stringent bore and water conditions.

Features:

Higher Efficiency

KSB Sheet Metal Pumps offers higher efficiency than the conventional Pumps.*

Sturdy NRV and Suction Casings

SS NRV's as compared to regular Cast Iron NRV's makes the pumps sturdier and small deflection in the pipes and severe water conditions don't harm the pumps.

KSB SS Pumps are fitted with SS 304 Valve Bodies which makes it much more suitable for the rigorous water conditions.

Ideal for Solar Conditions

SS sheet metal pumps are much lighter in weight than the conventional cast impellers, which makes the pumps to start early in the morning. The light weight also helps the pumps run longer durations in the fields.

The use of Hex Shafts


4" pumps are developed with hexagonal shafts which gives more engagement area and no slippage. This ensures better reliability and efficiency of the products.

Developed to handle severe conditions

SS 304 gives very high yield and mechanical strength than the conventional Noryl available. This makes the pumps give you un-interrupted water supply even for longer durations.

Protects from Sand

The use of SS Wearing Rings protects the pumps from small amount of sands entering the pumps.

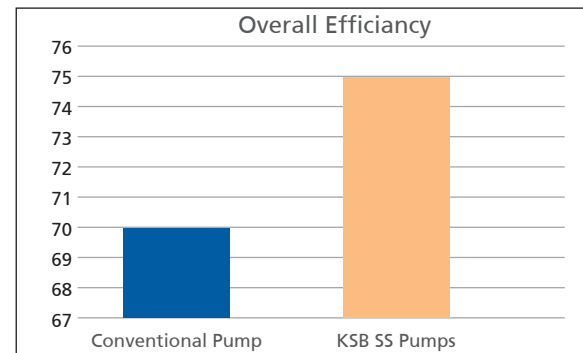

Sturdy NRV
Investment Cast SS 304 NRV for increased life, sturdy and aesthetically superior

Superior Pump performance
Efficient hydraulic designs

Curved Hook Bolt
For better mechanical designs

- 1 Electro polished cast components
- 2 Complete SS 304 Construction
- 3 All Components washed before welding
- 4 Welding joints validated @ 4200 rpm
- 5 Performances complying to MNRE specifications
- 6 Projection welded components





Rubber O'ring for better sand performance

Rubber Bush for better performance

NRV
NRV of SS-CORACHrom Pump

Regular NRV of CORA Pump

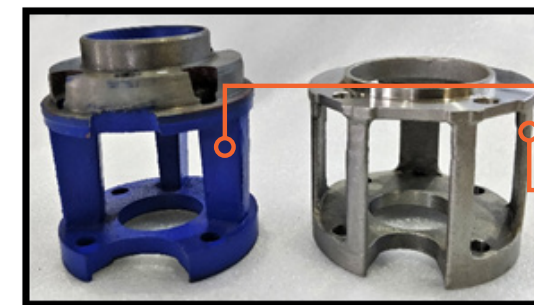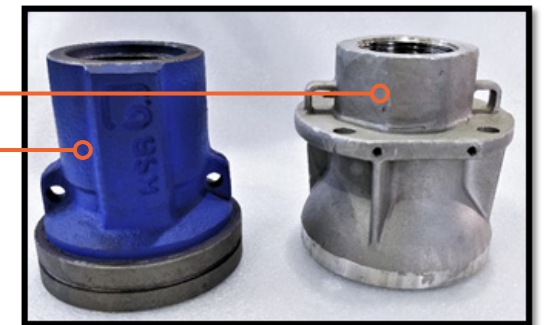



Suction Casing

Regular Suction casing of CORA Pump

Suction casing of SS-CORACHrom Pump

Impellers
Impeller of SS-CORACHrom Pump

Regular Noryl Impeller of CORA Pump

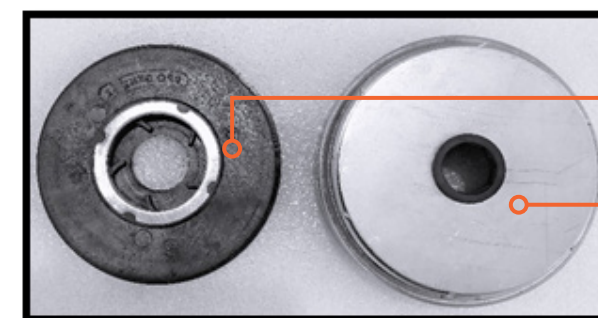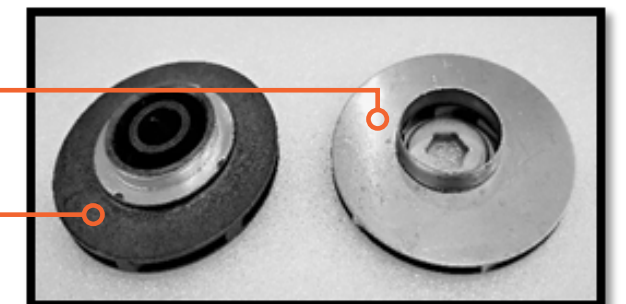

Diffuser

Regular Noryl Diffuser of CORA Pump

Diffuser of SS-CORACHrom Pump

Shaft
Regular Shaft (Round Bar) of CORA Pump

Regular Shaft (Hex Bar) of CORA Pump

