


HGC


Centrifugal Pump



-
- Pumping feed water in power stations
 - Condensate transport
 - Pressurised water generation for presses, bark peeling systems, descaling systems
 - Boiler feed applications
-

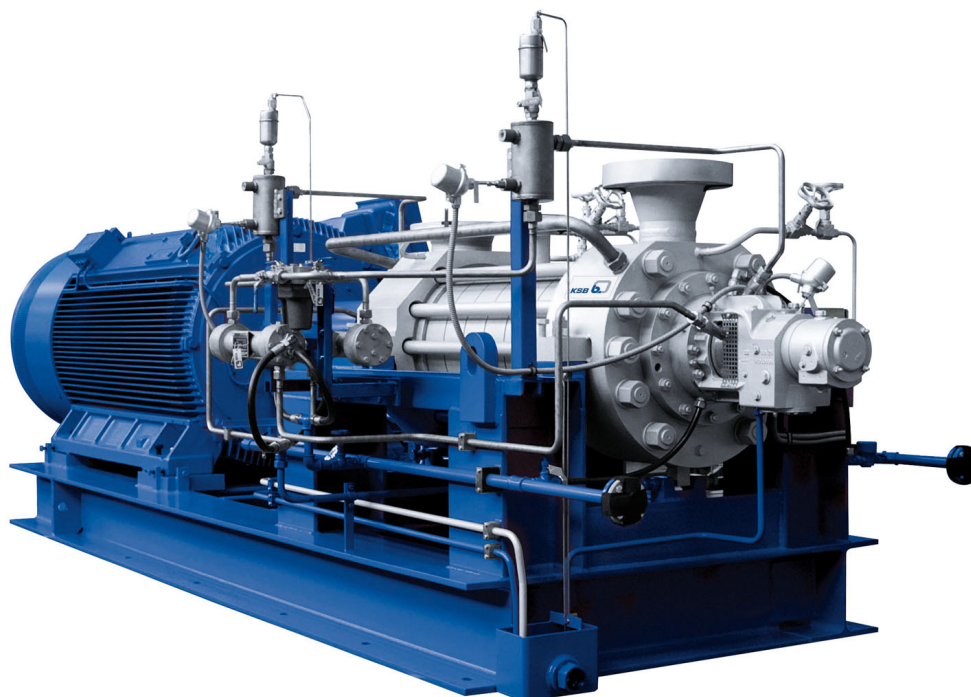

HGC – Centrifugal Pump

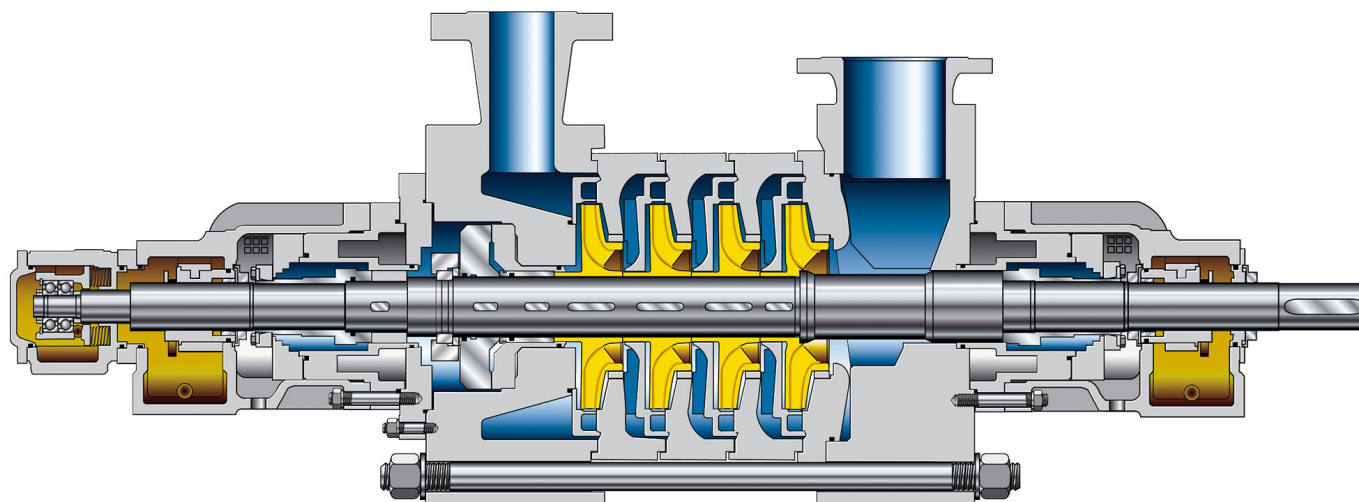

Benefits

■ High operating reliability

- Axial thrust balancing by balance disc
- Adaptation of pump casing to rotor deflection line

■ Tapping

- Extraction of one or several partial flows of feed water for use elsewhere in the power station

■ Ease of service

- Easy maintenance of wear parts (bearings, sealing elements, balancing devices)
- Metal-to-metal sealing of casing

■ Long service life

- Avoidance of cavitation erosion inside the pump through hydraulically optimised inlet
- Option of straight-shaft design (middle support) for increased operating reliability in case of frequent load changes

■ Reduced energy costs

- No pre-warming of pump required
- More than 100 impeller/diffuser combinations with optimum efficiencies

■ Low investment costs

- Double-entry inlet available as an option (so, in many applications, no booster pump is required)

Materials

Component	Material
Suction casing	Carbon steel
Discharge casing	Chrome steel
Stage casing	Chrome steel
Impeller/diffuser	Chrome steel
Shaft	Tempered steel

Operating data

Characteristic	Value	
Flow rate	Q [m³/h]	≤ 1450
	Q [US.gpm]	≤ 6350
Head	H [m]	≤ 4200
	H [ft]	≤ 13750
Operating pressure	p [bar]	≤ 420
	p [psi]	≤ 6050
Fluid temperature	T [°C]	≤ 200
	T [°F]	≤ 392
Speed	n [rpm]	≤ 7000
Frequency	[Hz]	50/60

Higher values on request