


HGD


Boiler Feed Pump



-
- Handling boiler feed water in utility power stations
-

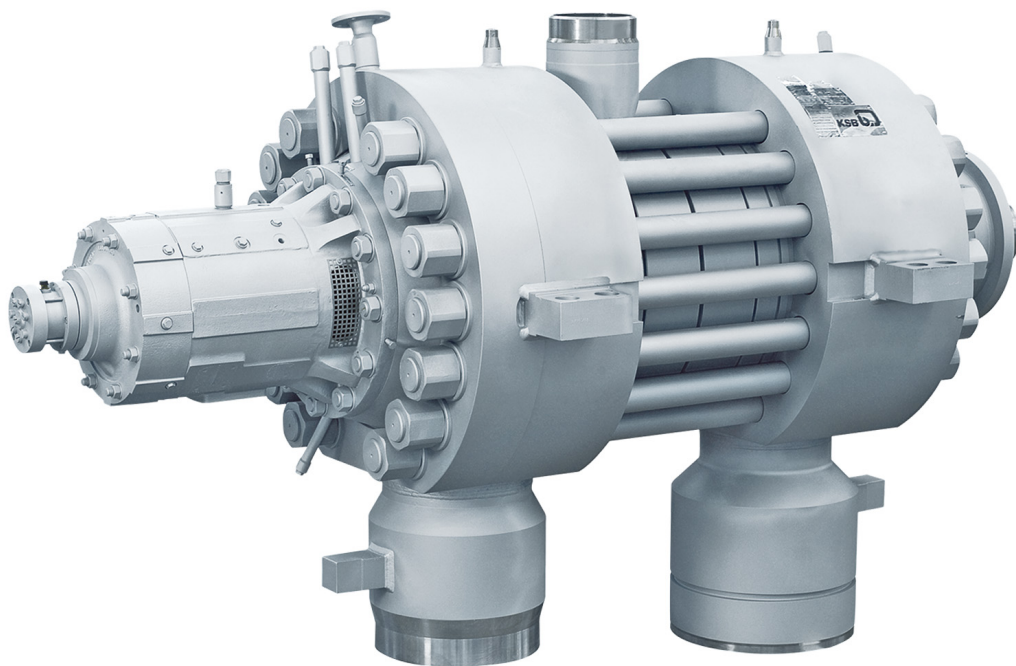

HGD – Boiler Feed Pump

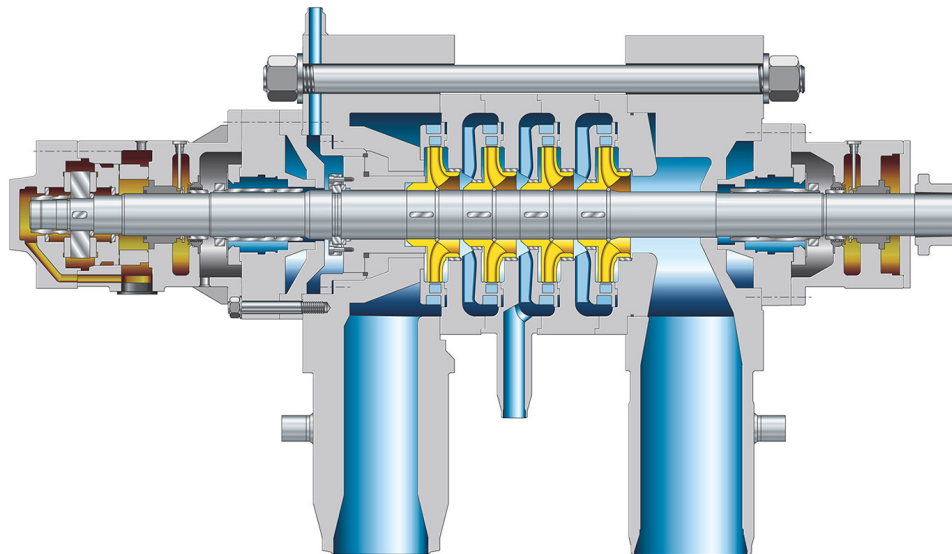

Benefits

■ High operating reliability

- Double drum enables optimum axial thrust balancing over a large operating range.
- Closed, single-piece bearing housings with high stiffness ensure excellent vibration behaviour.
- Cellular surface wear ring features outstanding anti-seizure properties.
- A stepped shaft with individually supported impellers ensures a defined introduction of axial thrust into the shaft.
- The pump casing is adapted to the rotor deflection line.
- Special vane profiling on suction stage impellers for optimised suction behaviour.

■ Ease of service

- Wear parts such as bearings, sealing elements and the balancing device are accessible for maintenance without the need to open the pump.

■ Reduced energy costs

- The efficiency is improved by the cellular surface wear ring.
- Order-specific hydraulic system selection for maximum efficiency

Operating data

Characteristic	Value	
Flow rate	Q [m ³ /h]	≤ 2500
	Q [US.gpm]	≤ 1100
Head	H [m]	≤ 4500
	H [ft]	≤ 14750
Fluid temperature	T [°C]	≤ 210
	T [°F]	≤ 410
Pump discharge pressure	p _d [bar]	≤ 450
	p _d [psi]	≤ 6500
Speed	n [rpm]	≤ 6100
Frequency	[Hz]	50/60

Higher values on request

Materials

Component	Material
Suction casing	Carbon steel
Discharge casing	Chrome steel
Stage casing	Chrome steel
Impeller/diffuser	Chrome steel
Shaft	Chrome steel