

HGM-S


Boiler Feed Pump



-
- Pumping feed water in power stations
 - Handling cold water
 - Boiler feed applications
 - Condensate transport
-



HGM-S – Boiler Feed Pump

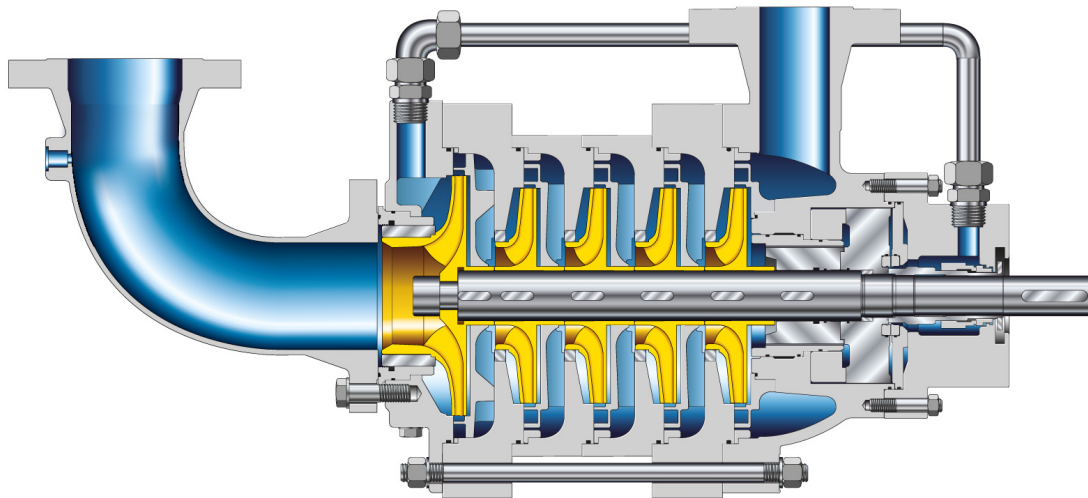

Benefits

■ Very smooth operation

- Product-lubricated bearings ensure excellent smooth running.

■ Low NPSH values

- Axial inlet makes for low NPSH values.
- Optimised suction stage impeller in the first stage

■ No auxiliary systems required

- Cooling water or lubricant are not needed.

■ Robust design and long service life

- The stage casing is fitted with a casing wear ring.
- Impellers and diffusers are made of chrome steel.

■ Service-friendly

- Designed with ease of service in mind

■ Optimum matching to customer requirements

- Variety of hydraulic systems enables optimum matching to customer requirements.

■ Mechanical seal design

- One mechanical seal is sufficient.
- Uncooled operation with standard seal up to 140 °C
- Uncooled operation with special seal up to 160 °C

■ Warranty

- A 5-year warranty is included as standard.

Materials

Component	Material		
	Variant 3	Variant 4	Variant 7 ¹⁾
Discharge casing	Stainless steel	Stainless steel	Steel
Stage casings	Stainless steel	Stainless steel	Steel
Suction stage impellers	Stainless steel	Stainless steel	Stainless steel
Impellers	Stainless steel	Stainless steel	Stainless steel
Diffusers	Stainless steel	Stainless steel	Stainless steel
Shaft	Steel	Stainless steel	Steel

Operating data

Characteristic	Value	
Flow rate	Q [m ³ /h]	≤ 390 ²⁾
	Q [l/s]	≤ 108 ²⁾
	Q [US.gpm]	≤ 1431 ²⁾
Head	H [m]	≤ 1000 ²⁾
	H [ft]	≤ 3280 ²⁾
Fluid temperature	T [°C]	≤ 160
	T [°F]	≤ 5408
Pump inlet pressure	p _s [bar]	≤ 7
	p _s [psi]	≤ 102
Pump discharge pressure	p _d [bar]	≤ 100
	p _d [psi]	≤ 1450
Speed	n [rpm]	≤ 3600

1 Combinations available: Variant 7 only for pump sizes 2 and 3

2 At max. permissible speed