

LevelControl Basic 2

Level Control Unit



BS



BC

- Grey water
- Waste water
- Service water supply

- Waste water lifting units / pump stations
- Draining of pits, shafts, etc.
- Dewatering

- Drainage
- Water extraction
- Fluid transport
- Disposal




LevelControl Basic 2 – Level Control Unit

Technical data


Characteristic		Type Basic Compact (BC)	Type Basic Control Cabinet (BS)
Nominal operating voltage	V [V AC]	3~400: +10 % -15 % 1~230: +10 % -15 %	
Mains frequency	F [Hz]	50 / 60 Hz ± 2 %	
Nominal insulation voltage	V [V AC]	500	
Rated current per motor	I [A]	1 to max. 10	1 to max. 63
Rated power per motor	P [kW]	DOL starting: Up to max. 4	DOL starting / star-delta starting: 0.35 to 30
Enclosure			IP54
Material		Plastic (polycarbonate) Colour: RAL 7035, light grey	Sheet steel Colour: RAL 7035, grey
Operating temperature	T [°C]	-10 to +50	
Bearing temperature	T [°C]	-10 to +70	
Sensors		Float switches, digital level switches, pneumatic system, bubbler system, 4-20 mA sensor input	
Explosion protection		For controlling pumps inside (zones 1 and 2) or outside potentially explosive atmospheres	

KSB pump with LevelControl Basic 2

- AmaDrainer, AmaDrainer Box
- Amarex, Amarex KRT, AmaDrainer
- AmaPorter, AmaPorter S
- CK pump station
- Etaline

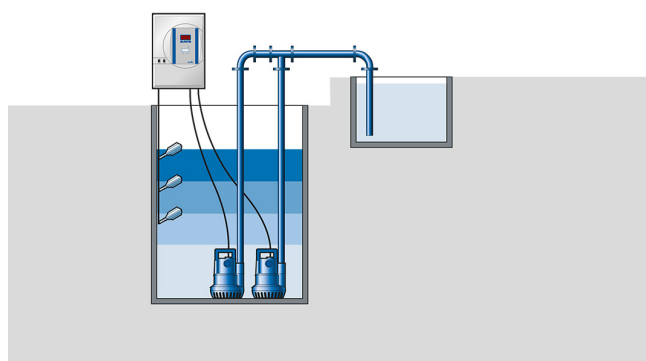

Level detection via float switches

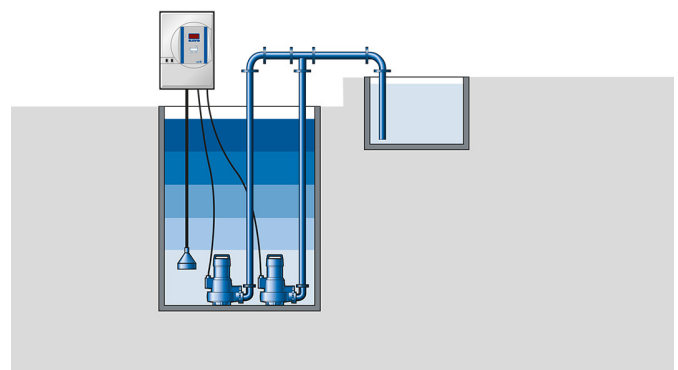

Pneumatic measurement/bubbler system with pressure bell

- Sewabloc, MK
- Sewatec, Evamatic Box
- MiniCompacta / Compacta

Benefits

■ Fast, easy, efficient

- Easy to understand, install and operate
- Ample connection space allows straightforward connection of pumps and sensors.
- Factory-set parameters for swift commissioning and ideal for combination with KSB pumps

■ Reliable operation based on comprehensive information

- The integrated display indicates major parameters.
- Display of measured values such as water level, operating hours, mains voltage, starts per pump, etc.
- Operating status and fault indication per pump are displayed.

■ Comprehensive functionality for high system availability

- Overcurrent and short-circuit protection is ensured by miniature circuit breakers (230 V model) or motor protection switches (400 V model).
- The integrated high water alert provides for early recognition of critical water levels and warnings to prevent damage.
- Comprehensive monitoring of the pumping station, e.g. voltage and phases, dry running protection and moisture detection
- System redundancy is ensured and operating reliability increased by using a stand-by pump.
- Functional check runs after idle periods are available.
- Rechargeable battery retrofit kit for powering electronics, sensors and alarm equipment, e.g. horn, in the event of power supply failure