




Omega FFX

Sprinkler Pump

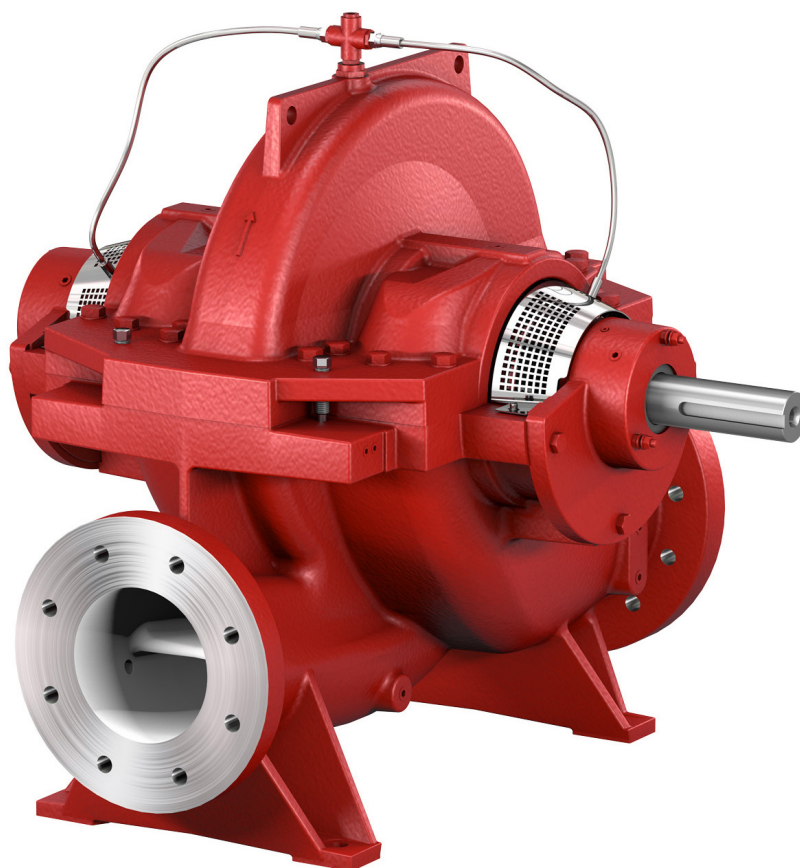

• FM-approved sprinkler systems

• UL-listed sprinkler systems

• Sprinkler systems to EN 12845

More information
www.ksb.com/en-gb



Omega FXF – Sprinkler Pump

Benefits

■ Fire protection approvals

- The pump is FM- and UL-certified.

■ Pump in split-case design

- The in-line pump can be integrated directly into the piping.
- A double-entry impeller balances axial thrust, providing high operating reliability.
- The design is service-friendly.
- The rolling element bearings are grease-packed for life and therefore maintenance-free.
- The design features an integrated gland packing.
- The casing is sealed reliably.

■ Control unit

- The system features a touch display for user-friendly operation.
- Activities are logged.
- The configuration can be adapted to individual customer requirements.

■ Drive

- The diesel engine meets the respective approvals.
- The IEC motor is supplied as per requirements.

■ Pump set

- The pump set can be configured individually according to requirements.
- A design compliant with the German water resources act (WHG) is available.
- A torsion-resistant base frame is used.

■ Service

- 24/7 emergency service is available.
- High availability of spare parts is ensured.
- A global service network is available.

Operating data

Characteristic	Value	
Size	DN [mm]	200-250
	DN ["]	8-10
Flow rate	Q [l/min]	≤ 11924
	Q [US.gpm]	≤ 4900
Head ¹⁾	H [m]	≤ 140
	H [ft]	≤ 459
Operating pressure ¹⁾	p [bar]	≤ 25
	p [psi]	≤ 319
Max. inlet pressure	p [bar]	≤ 5.15
	p [psi]	≤ 75
Fluid temperature	T [°C]	0 to 80
	T [°F]	32 to 176

¹ Depending on the material and size

Sizes

Sizes	Rating	Pmin	Pmax
200-330	1750 GPM	91 kW	224 kW
200-520	2000 GPM	94 kW	339 kW
200-670	2000 GPM	278 kW	417 kW
200-330	2000 GPM	91 kW	224 kW
200-520	2500 GPM	94 kW	339 kW
200-670	2500 GPM	278 kW	417 kW
200-330	2500 GPM	91 kW	214 kW
250-600	3000 GPM	196 kW	386 kW
250-450	3000 GPM	137 kW	373 kW
250-600	3500 GPM	253 kW	386 kW
250-450	3500 GPM	137 kW	373 kW