

RPH-V

Process Pump



-
- | | | |
|--|--|--|
| <ul style="list-style-type: none">• Refineries• Chemical industry | <ul style="list-style-type: none">• Petrochemical industry | <ul style="list-style-type: none">• Onshore processes and offshore processes |
|--|--|--|
-



RPH-V – Process Pump

Description / design

Vertical single-stage sump pump to API 610 and ISO 13709 (heavy duty), type VS4, with integral thrust bearing assembly and separate discharge line. ATEX-compliant version available.

Operating data

Characteristic		Value	
		50 Hz	60 Hz
Sizes	DN [mm]	40 to 150	40 to 150
	DN ["]	1.5 to 6	1.5 to 6
Flow rate	Q [m³/h]	≤ 150	≤ 180
	[US.gpm]	≤ 660	≤ 793
Head	H [m]	≤ 240	≤ 290
	H [ft]	≤ 787.4	≤ 951.4
Fluid temperature	T [°C]	-30 to +274	-30 to +274
	T [°F]	-22 to +525.2	-22 to +525.2
Operating pressure	p [bar]	≤ 35 ¹⁾	≤ 35 ¹⁾
	p [psi]	≤ 508	≤ 508
Maximum immersion depth	[m]	≤ 5	≤ 5
	[ft]	≤ 16.4	≤ 16.4
Installation depths ²⁾	ET [mm]	590 to 5000	590 to 5000

Other operating data on request

Benefits

■ Integral thrust bearings

- Oil-lubricated bearings integrated in the pump exceed the life requirements specified by API 610, reducing maintenance costs and work. Bearings located in the motor are not subjected to thrust forces from the pump.
- Grease lubrication available on request

■ Rigid coupling

- Coupling with removable spacer arranged between seal chamber and thrust bearing facilitates maintenance and removal of mechanical seal.

■ Variety of seal solutions

- Seal chamber designed to API 610 allows installation of any API 682 mechanical seal to meet specific process requirements.
- Gland packing available on request

■ Robust radial bearings


- Product-lubricated PEEK / carbon guide bearings with bearing span below requirements of API 610 ensure low vibrations and reliable operation.
- Other guide bearing materials available on request

■ Optimal lubrication

- Various guide bearing lubrication options available to suit specific applications
 - Internal lubrication by fluid handled
 - Lubrication by external liquid

■ Flexible installation

- Circular or rectangular soleplate allows easy adaptation to different installation conditions.

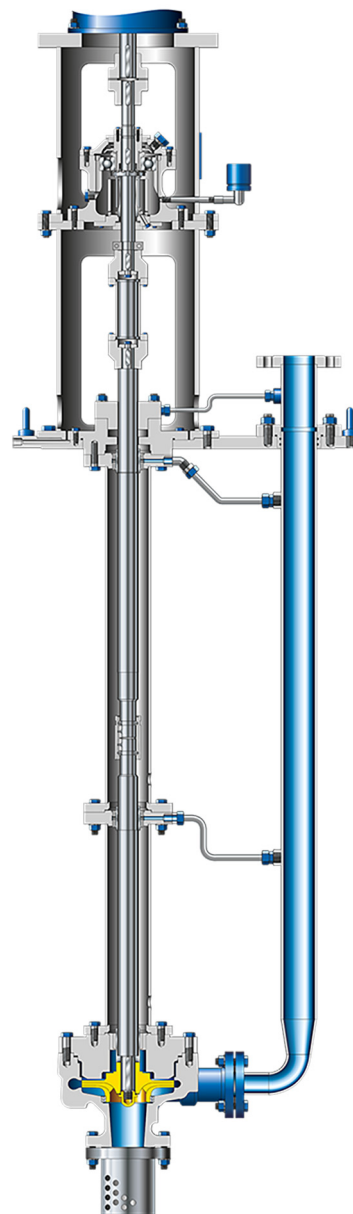

Materials

- S-5, S-6, S-8, C-6, A-8, D-1

1 For piping in material ASTM A 106

2 Standard; larger installation depths on request