

RPHb


Single-suction, Two-stage Heavy-duty BB2 Process Pump to API 610



-
- | | | |
|---------------------|--------------------------|----------------------|
| • Refineries | • Petrochemical industry | • Offshore processes |
| • Chemical industry | • Onshore processes | |
-



RPHb – Single-suction, Two-stage Heavy-duty BB2 Process Pump to API 610

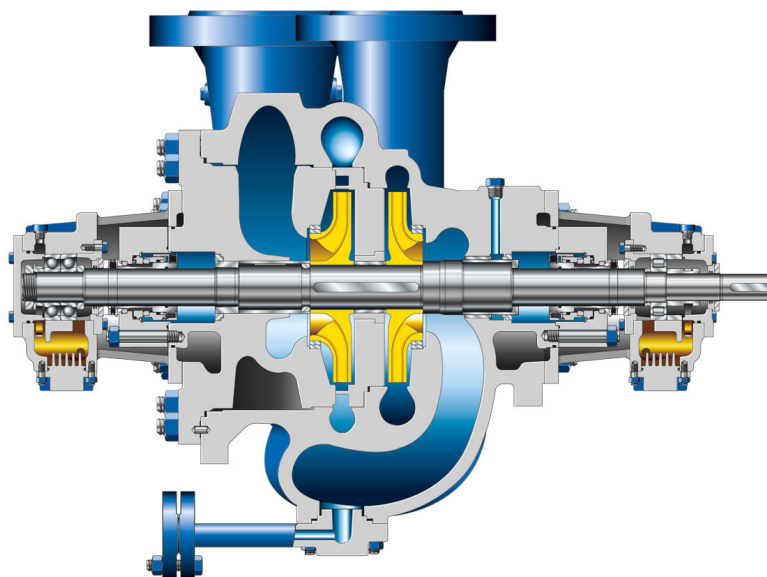

Benefits

■ Robust design for longer service life

- Process pump in heavy-duty design to API 610
- Optimised pressure boundary and hydraulic system with reinforced optimised shaft

■ Wide range of variants for a broad application range and optimum adaptation to the system

- Numerous flange designs
- Large choice of materials
- Coolable/heatable seal housing
- Various bearing lubrication variants

■ Long service life and high level of reliability of bearings

- Heavy-duty paired 40° angular contact ball bearings
- Diffuser design and impellers in back-to-back arrangement
- Standard version with oil ring lubrication and labyrinth seals
- Version with hydrodynamic bearings for higher energy density

■ Lower operating costs and higher system availability

- Comprehensive hydraulic selection chart for optimum selection
- Better efficiencies and NPSH values than OH2 pumps
- No need for a separate cooling circuit; integrated cooling fins and optional fan impeller ensure optimum cooling of the bearing brackets.

■ Ease of maintenance

- Easy to monitor and service due to top-top flange arrangement
- Suction-side casing cover simplifies rotor removal.
- Straightforward servicing due to cartridge mechanical seals to API 682

- Replaceable casing and impeller wear rings

- Modular design system reduces spare parts stock.

Operating data

Characteristic		Value	
		50 Hz	60 Hz
Flow rate	Q [m³/h]	≤ 2100	≤ 1900
	Q [USgpm]	≤ 9246	≤ 8365
Head	H [m]	≤ 680	≤ 800
	H [ft]	≤ 2231	≤ 2625
Operating temperature	T [°C]	-80 to 450	
	T [°F]	-112 to 842	
Operating pressure	p [bar]	≤ 100	
	p [psi]	≤ 1450	
Nominal size	[mm]	40 - 300	
	[inch]	1.5 - 12	

Other values on request

Materials

S5, S6, S8, C6, A8, D1, D2 and special materials