

RPHbd


Double-suction, Two-stage Heavy-duty BB2 Process Pump to API 610



-
- | | | |
|---------------------|--------------------------|----------------------|
| • Refineries | • Petrochemical industry | • Offshore processes |
| • Chemical industry | • Onshore processes | |
-



RPHbd – Double-suction, Two-stage Heavy-duty BB2 Process Pump to API 610

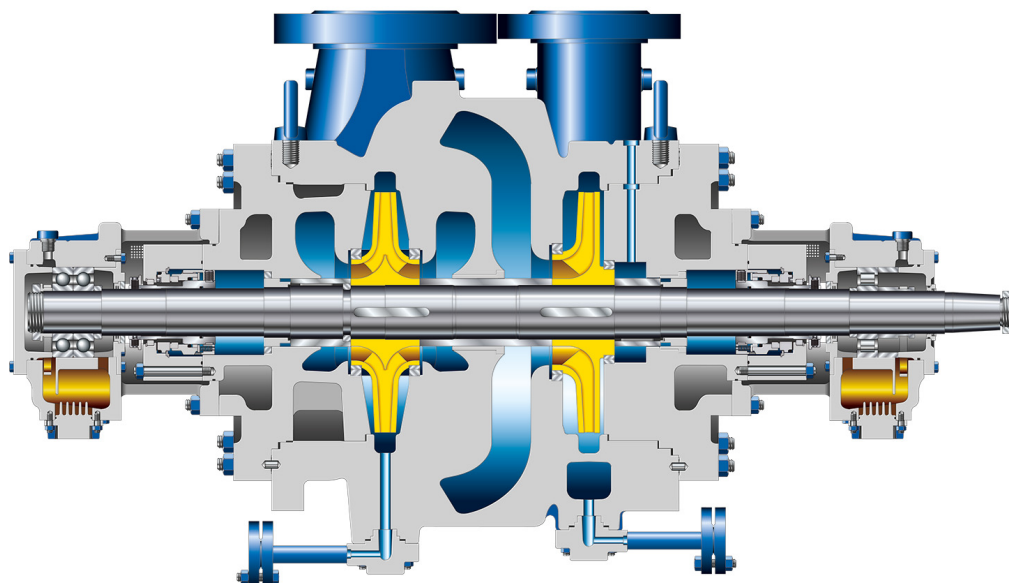

Benefits

■ Robust design for longer service life

- Process pump in heavy-duty design to API 610
- Optimised pressure boundary and hydraulic system with reinforced optimised shaft

■ Wide range of variants for a broad application range and optimum adaptation to the system

- Numerous flange designs
- Large choice of materials
- Coolable/heatable seal housing
- Various bearing lubrication variants

■ Long service life and high level of reliability of bearings

- Heavy-duty paired 40° angular contact ball bearings
- Balancing line and double volute
- Standard version with oil ring lubrication and labyrinth seals
- Version with hydrodynamic bearings for higher energy density

■ Lower operating costs and higher system availability

- Comprehensive hydraulic selection chart for optimum selection
- Better efficiencies and NPSH values than OH2 pumps
- Very low NPSH values due to double-suction impeller
- No need for a separate cooling circuit; integrated cooling fins and optional fan impeller ensure optimum cooling of the bearing brackets.

■ Ease of maintenance

- Easy to monitor and service due to top-top flange arrangement
- Straightforward servicing due to cartridge mechanical seals to API 682

- Replaceable casing and impeller wear rings
- Modular design system reduces spare parts stock.

Operating data

Characteristic		Value	
		50 Hz	60 Hz
Flow rate	Q [m³/h]	≤ 1900	≤ 1700
	Q [Usgpm]	≤ 8365	≤ 7485
Head	H [m]	≤ 550	≤ 540
	H [ft]	≤ 1804	≤ 1772
Operating temperature	T [°C]	-80 to 450	
	T [°F]	-112 to 842	
Operating pressure	p [bar]	≤ 100	
	p [psi]	≤ 1450	
Nominal size	[mm]	80 - 250	
	[inch]	3 - 10	

Other values on request

Materials

S5, S6, S8, C6, A8, D1, D2 and special materials