

IGLOO - Nano Starter Kit

Actel IGLOO FPGA AGL250V2-VQG100 Starter Kit


Index

Sheet #01 - Cover Page
Sheet #02 - Voltage Regulators and Power Headers
Sheet #03 - Current Measurement Headers
Sheet #04 - Actel AGL250V2-VQG100 FPGA
Sheet #05 - JTAG, Reset, Clock and Flash Freeze
Sheet #06 - LED, Push Button and DIP Switches
Sheet #07 - USB-to-UART
Sheet #08 - GPIO Headers
Sheet #09 - Manufacturing Points

www.actel.com
Actel Technical Support: +1 (800) 262-1060

Copyright (C) 2008 Actel. All rights reserved.

Schematic sch_top		Cover Page	
Originator: Bhavesh Desai, SLS Corp			
Title			
IGLOO - Nano Starter Kit			
Size A	Document Number SCH-AGLNNANO-0845-B1B		Rev B
Date: Tuesday, June 09, 2009	Sheet	1	of 9

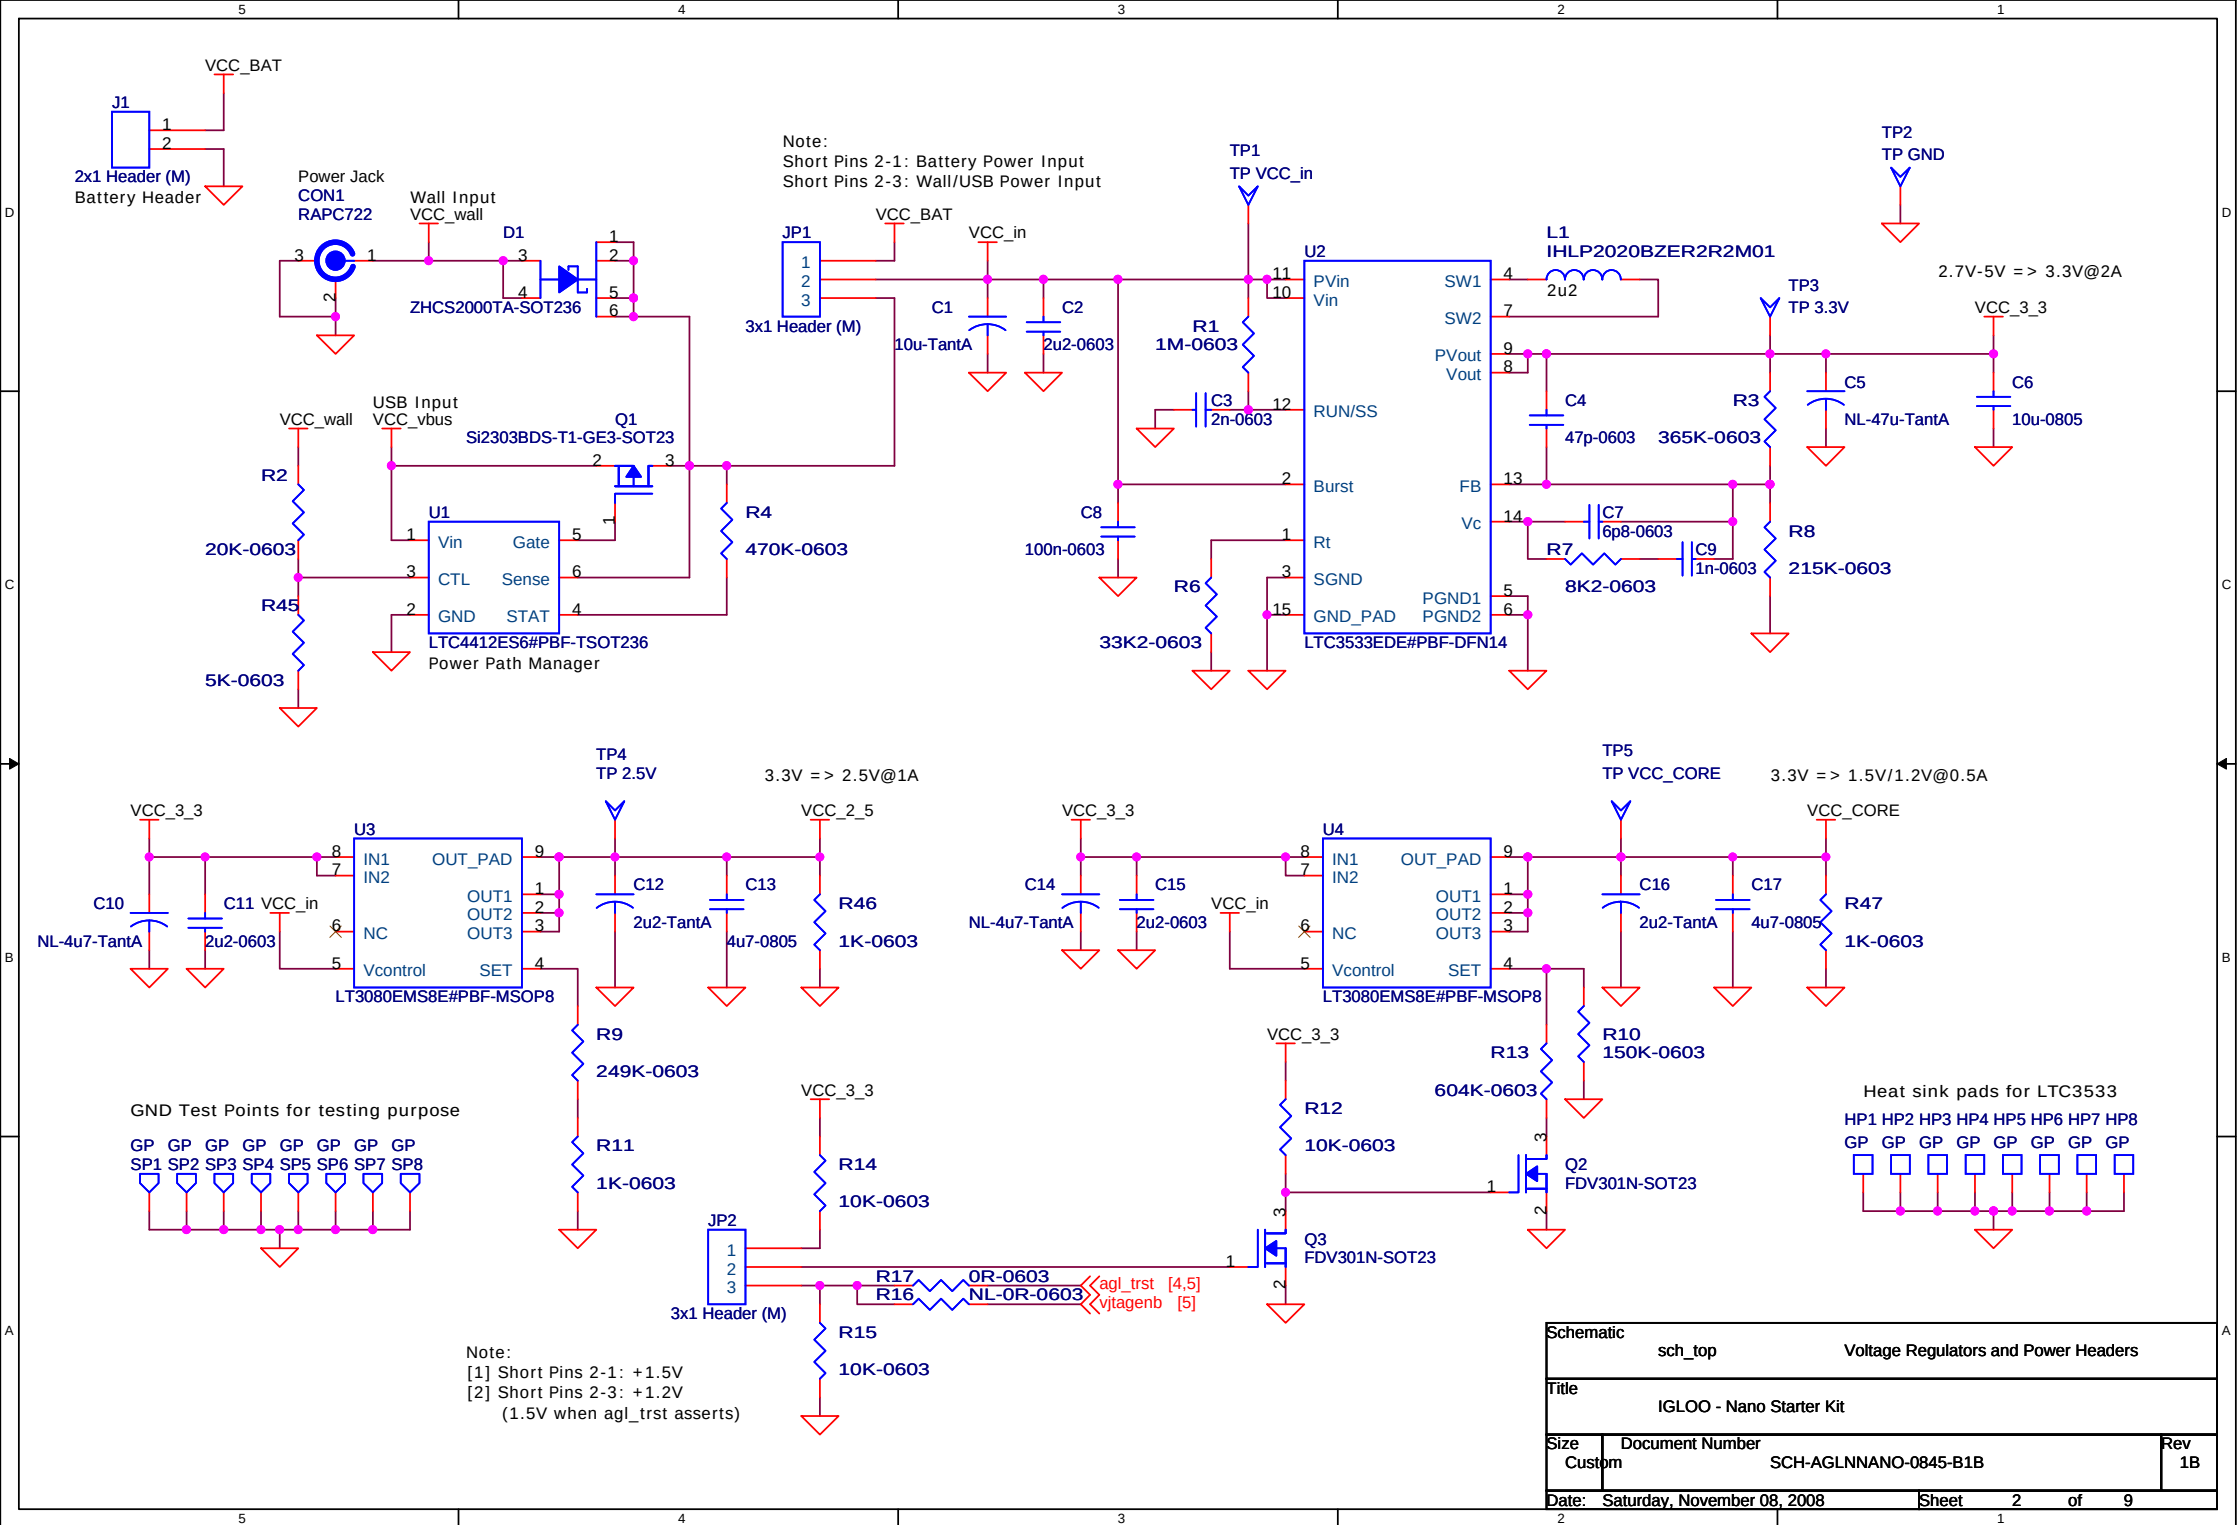


Note:

Short Pins 1-2: +3.3V

Short Pins 3-4: +2.5V

Short Pins 5-6: VCC_CORE (+1.5V/+1.2V)

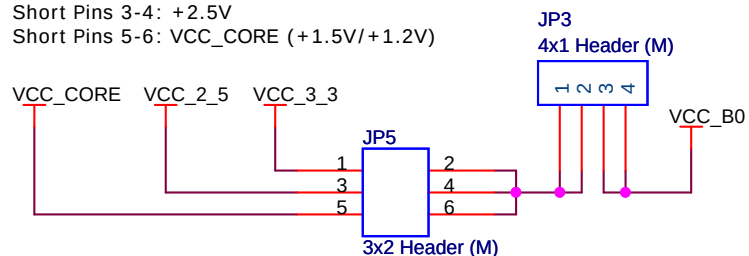


Note:

Short Pins 1-2: +3.3V

Short Pins 3-4: +2.5V

Short Pins 5-6: VCC_CORE (+1.5V/+1.2V)

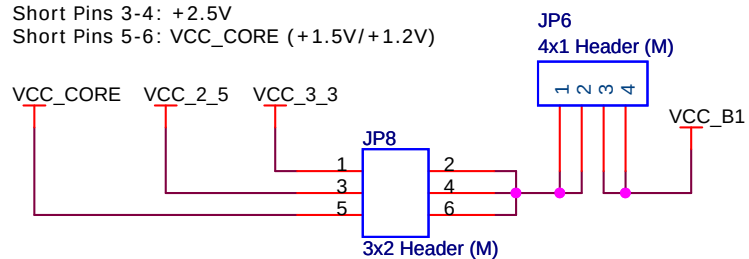


Note:





Short Pins 1-2: +3.3V

Short Pins 3-4: +2.5V


Short Pins 5-6: VCC_CORE (+1.5V/+1.2V)

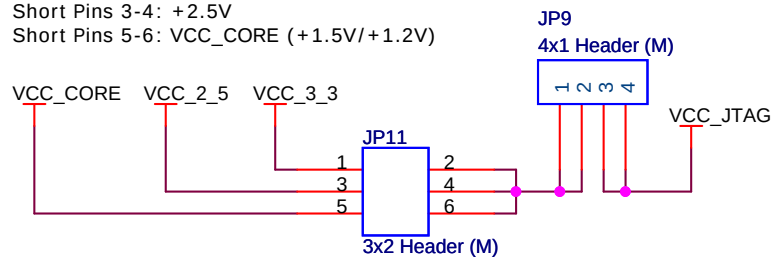


Note:
Current Measurement Jumpers:
Short Pins 2-3 for normal operation.

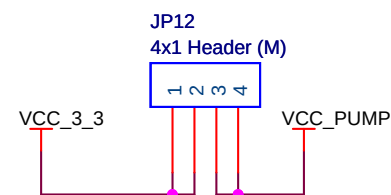


Schematic				
sch_top		Current Measurement Headers		
Title				
IGLOO - Nano Starter Kit				
Size A	Document Number SCH-AGLNNANO-0845-B1B			Rev 1B
Date:	Saturday, November 08, 2008		Sheet	3 of 9

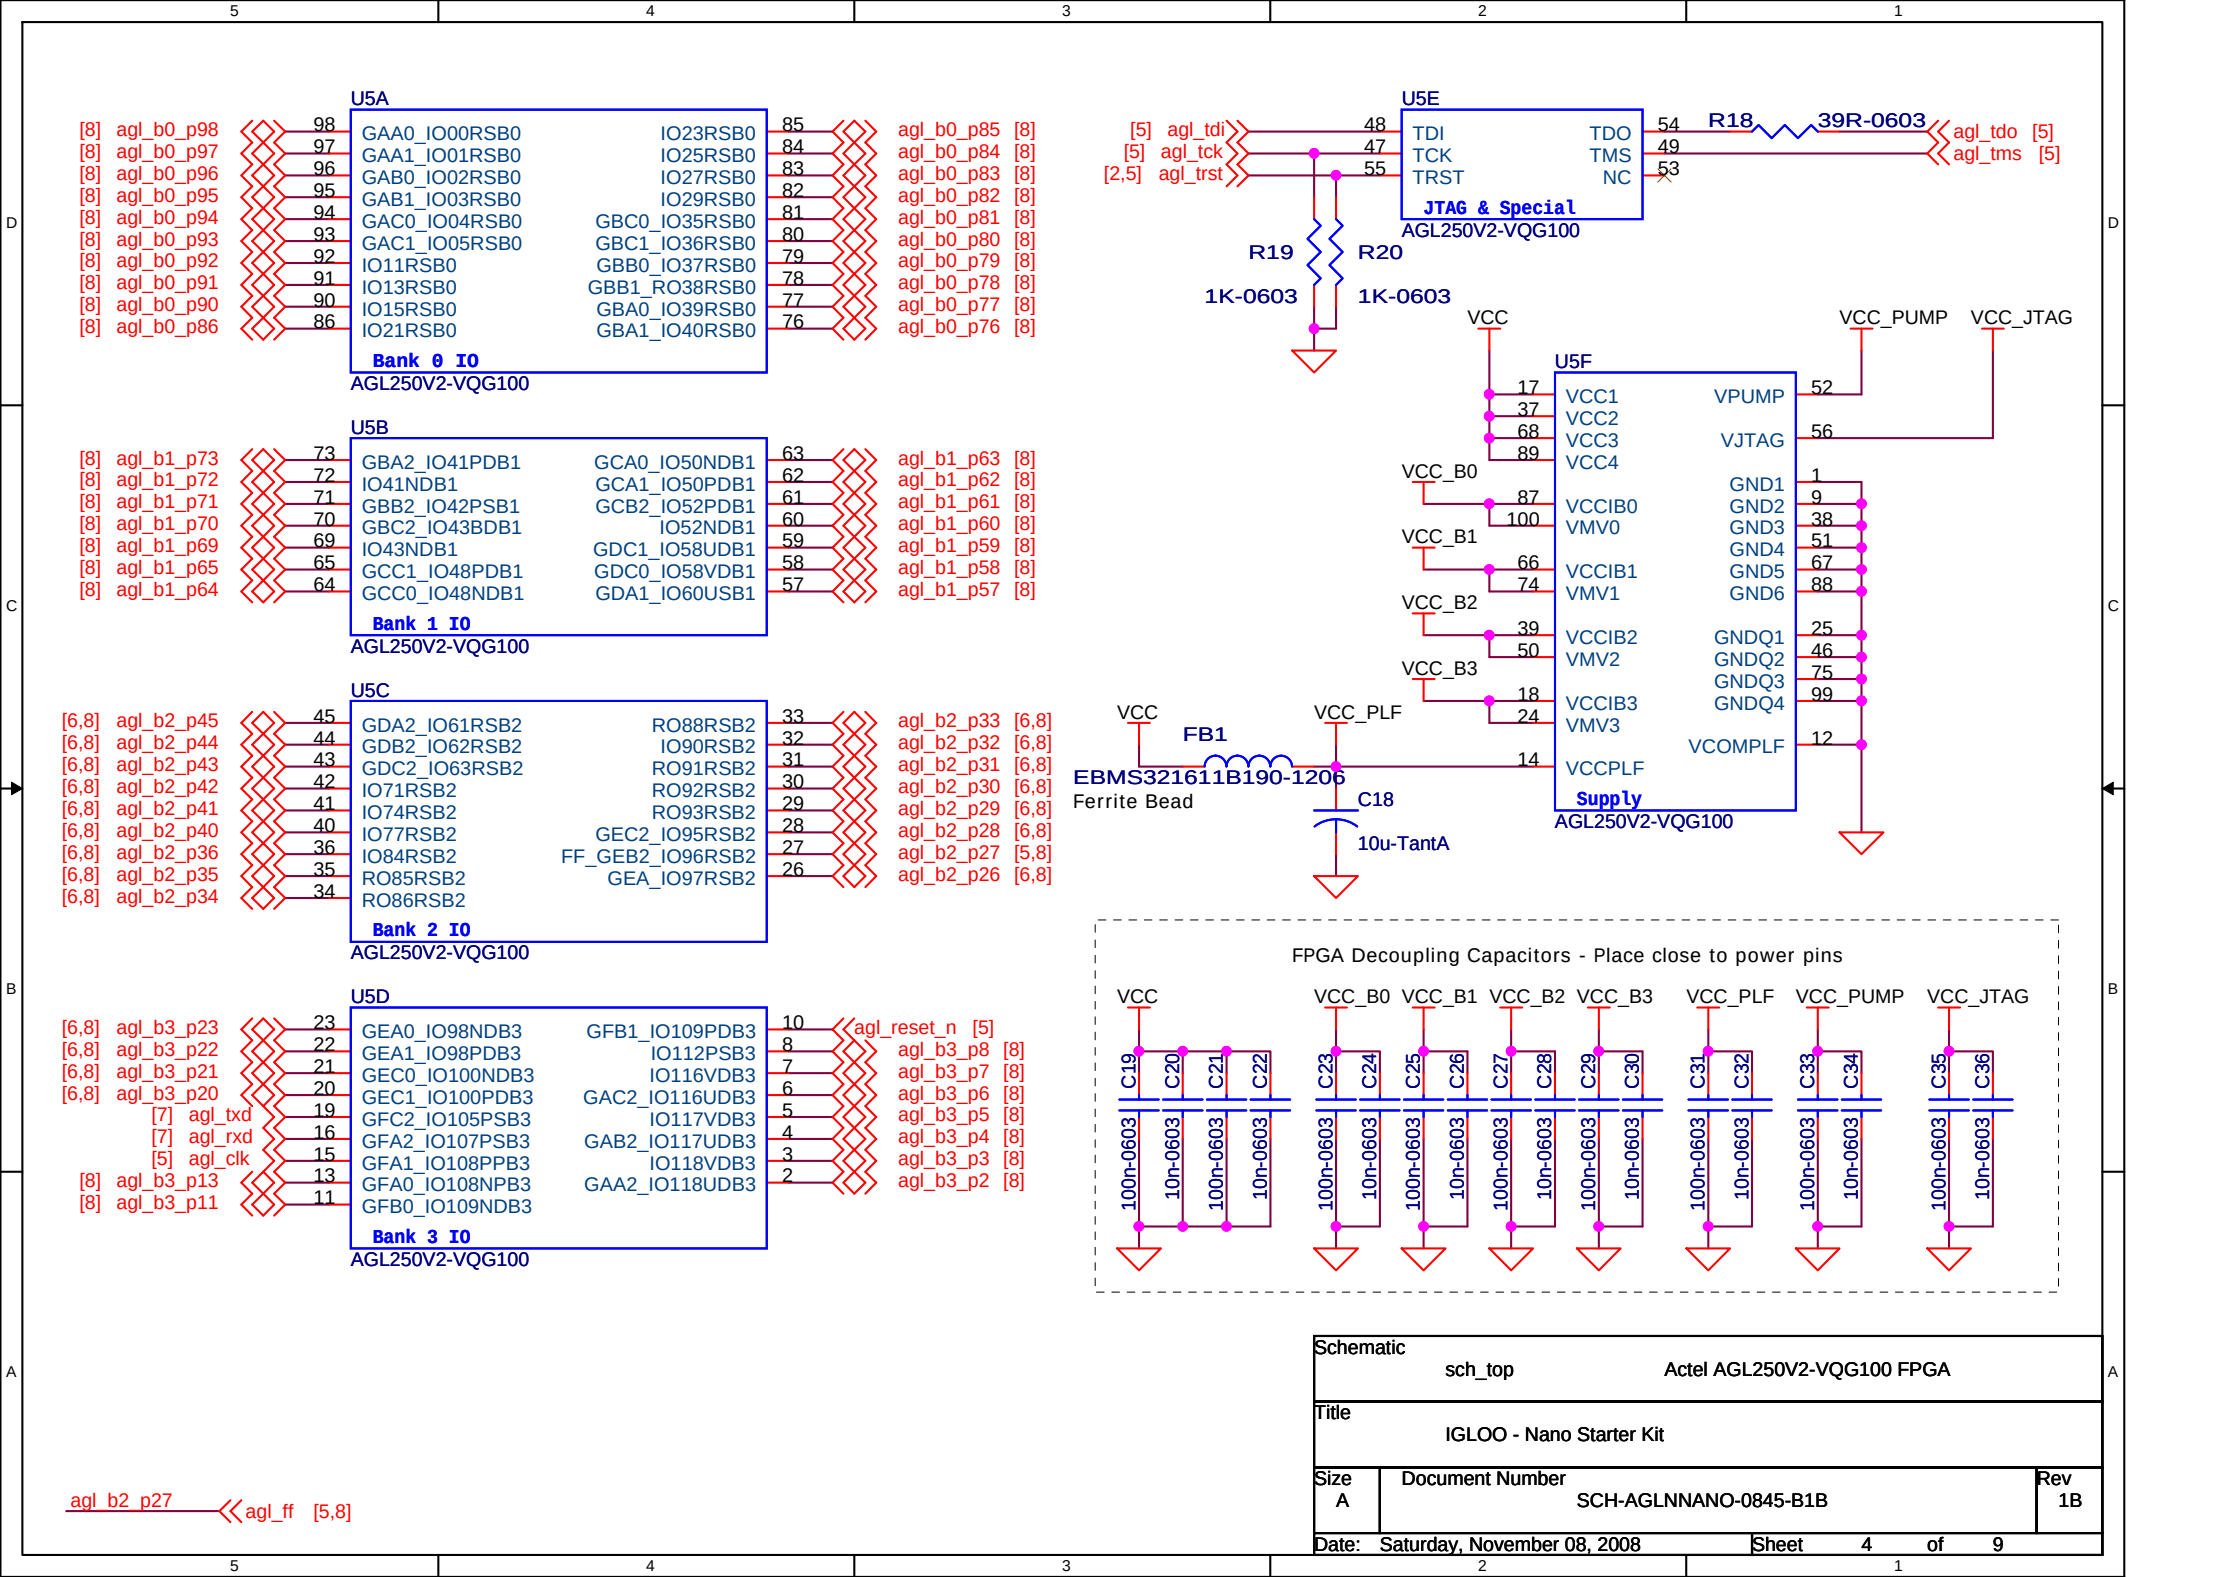


Reset

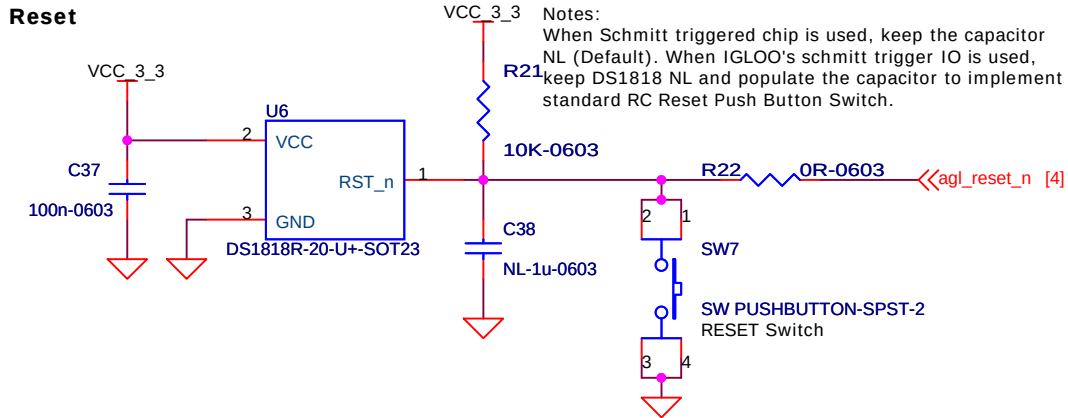


Clock Oscillator

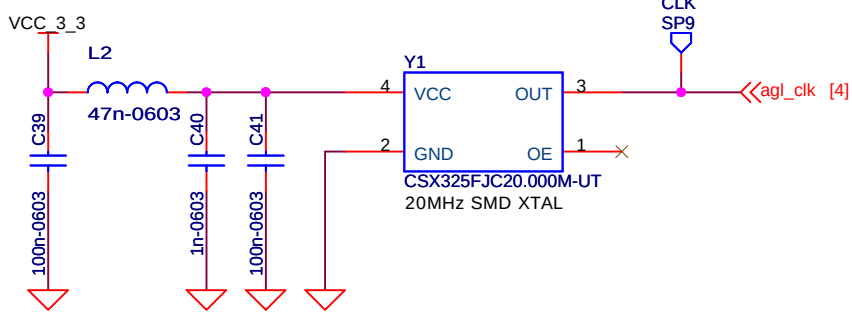


Flash Freeze

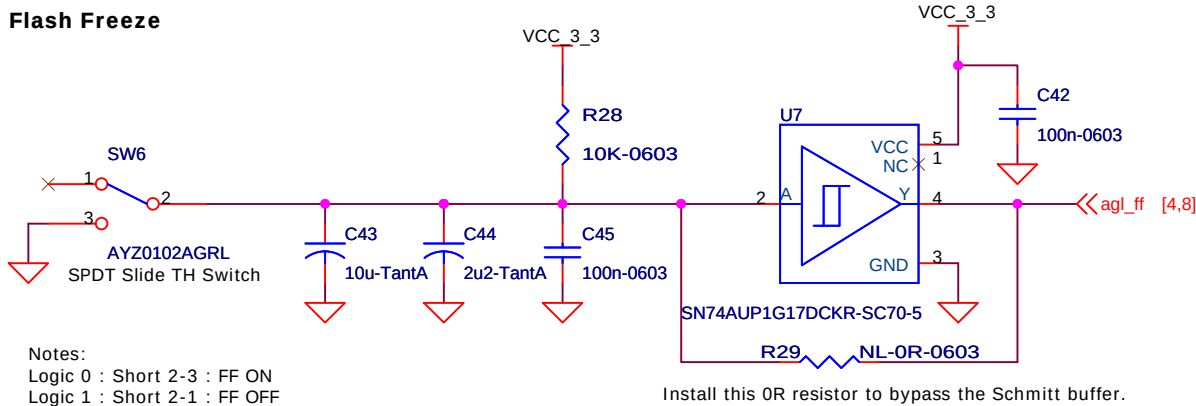




FPGA Programming Headers

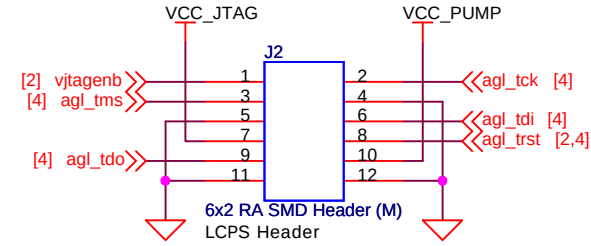

Note:
Place these isolation resistors close to the LCPS Header so that stub length on JTAG lines is reduced when the entire FP3 interface is NL along with the isolation resistors (Default).



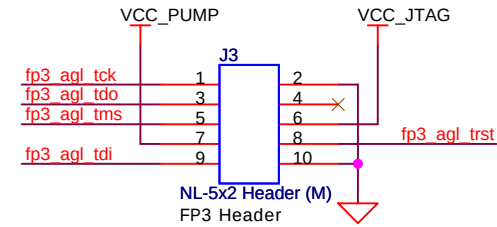


Schematic			sch_topJTAG, Reset, Clock and Flash Freeze			A
Title						
IGLOO - Nano Starter Kit						
Size	Document Number				Rev	
Custom	SCH-AGLNNANO-0845-B1B				1B	
Date:		Saturday, November 08, 2008		Sheet	5 of 9	

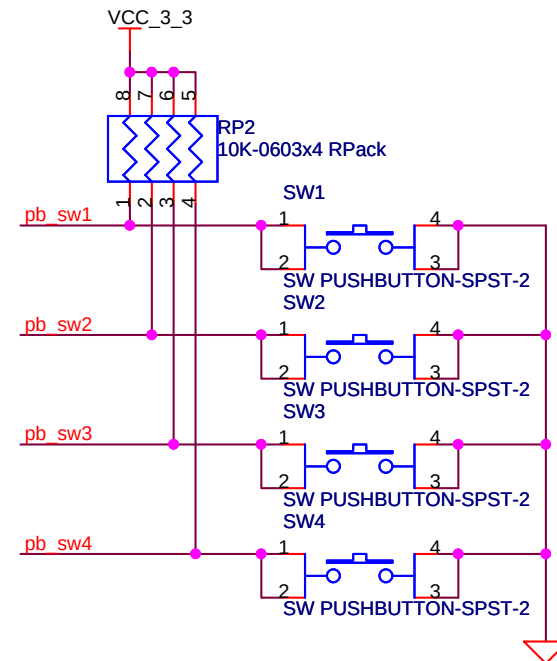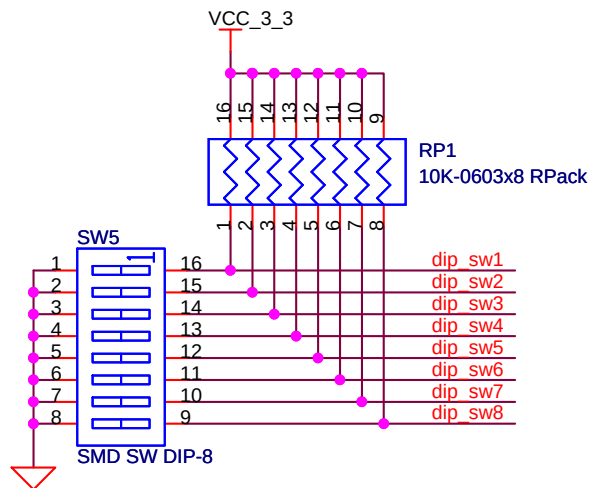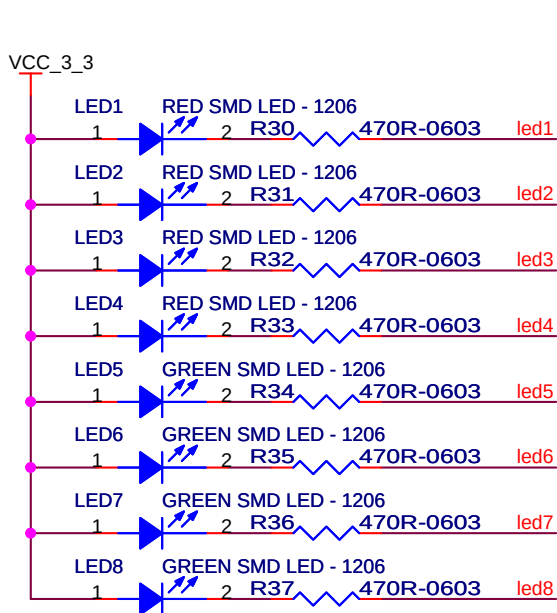


Note:


Remove Jumper from these headers to detach the peripheral from the FPGA IO and use the header IO.

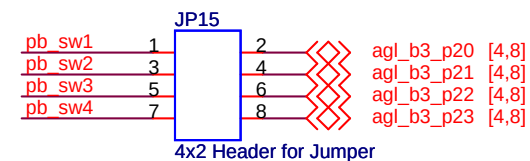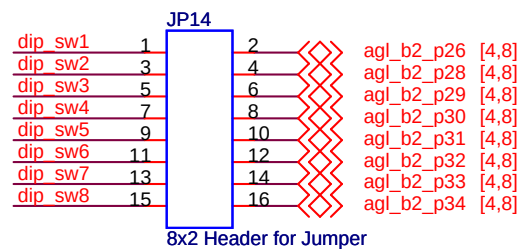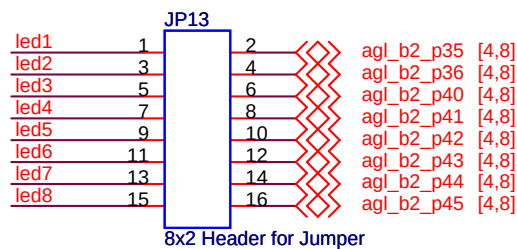



Schematic					A
sch_top		LED, Push Button and DIP Switches			
Title					
IGLOO - Nano Starter Kit					
Size	Document Number			Rev	
A	SCH-AGLNNANO-0845-B1B			1B	
Date:	Saturday, November 08, 2008		Sheet	6 of 9	

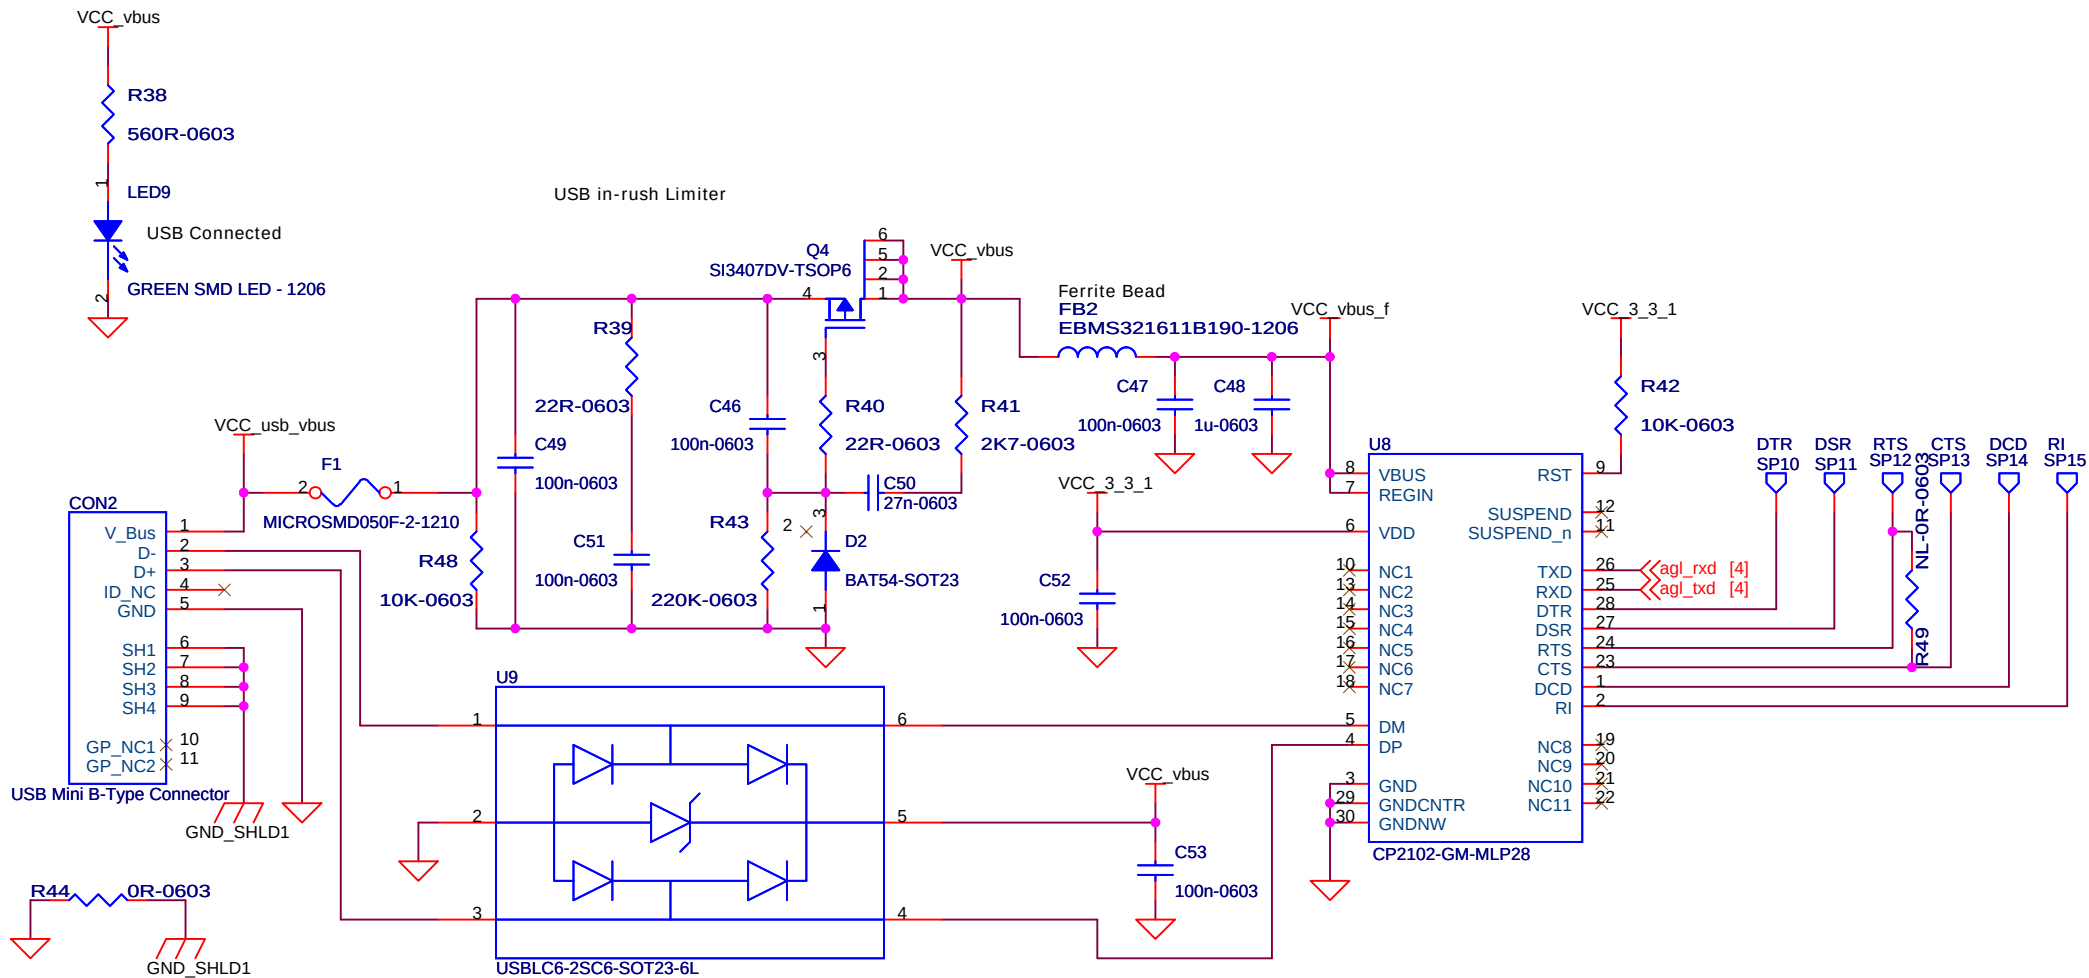

Schematic				
sch_top		USB-to-UART		
Title				
IGLOO - Nano Starter Kit				
Size	Document Number			Rev
Custom	SCH-AGLNNANO-0845-B1B			1B
Date: Saturday, November 08, 2008		Sheet 7 of 9		

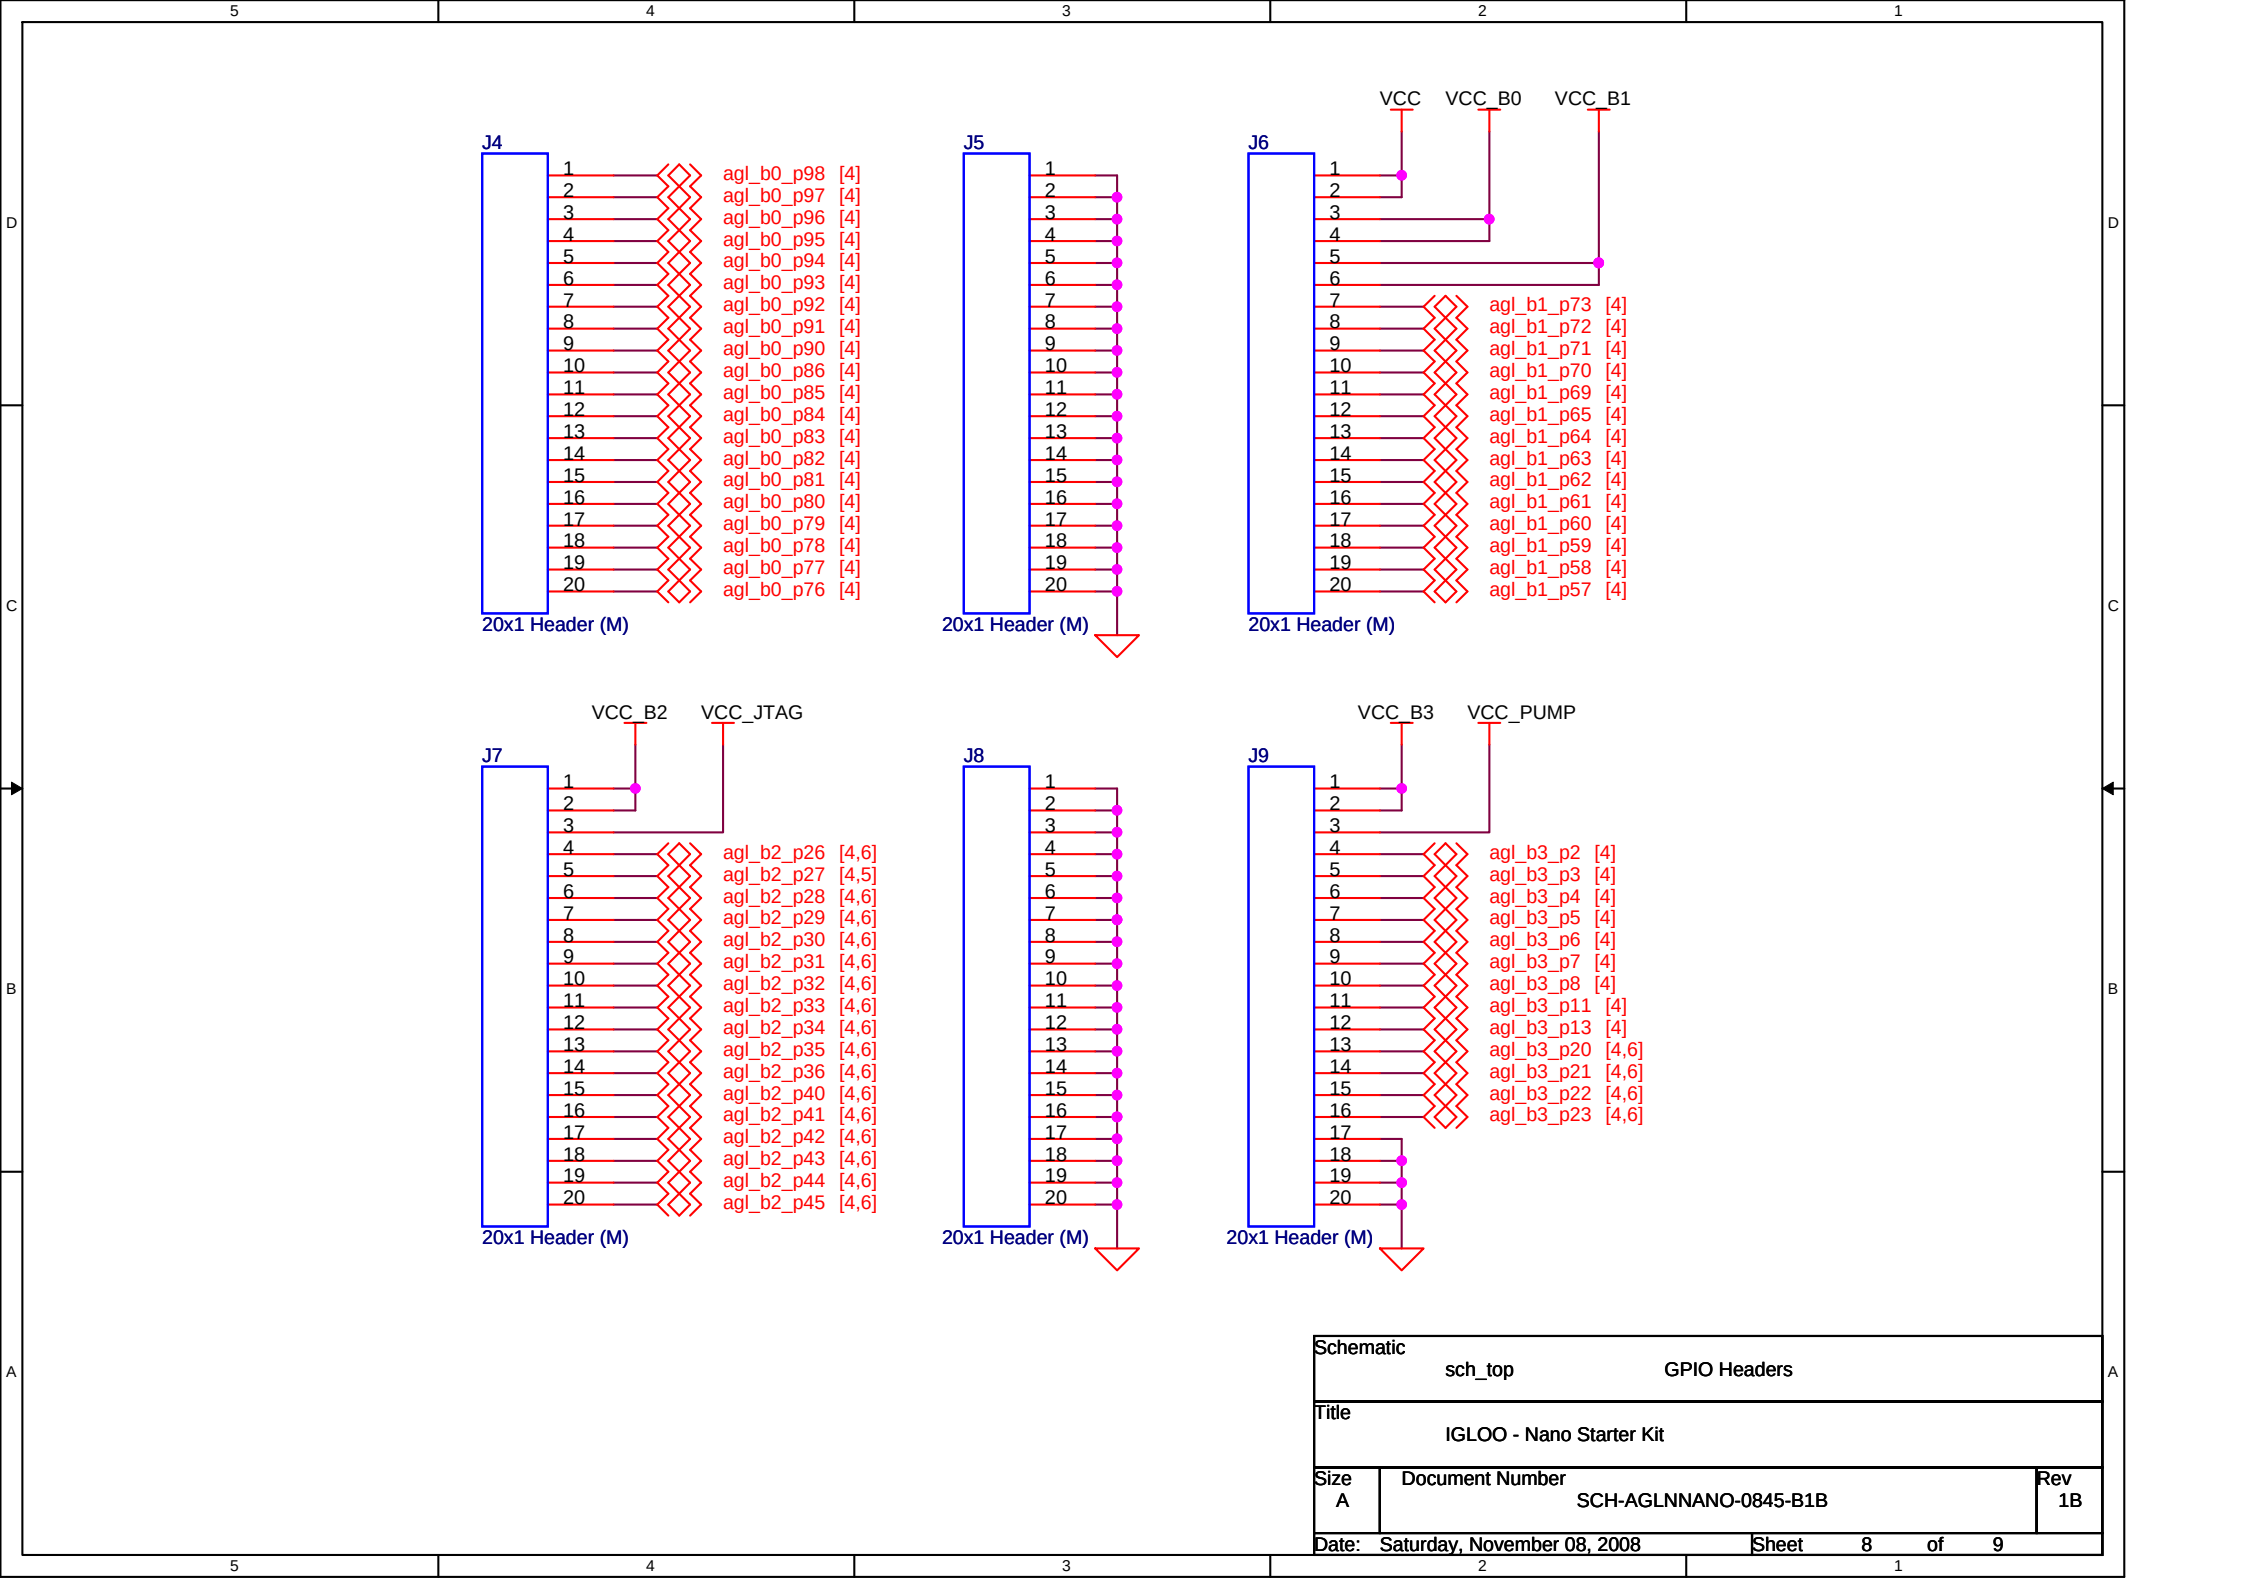

Schematic				
sch_top		GPIO Headers		
Title				
IGLOO - Nano Starter Kit				
Size A	Document Number SCH-AGLNNANO-0845-B1B			Rev 1B
Date: Saturday, November 08, 2008		Sheet	8 of 9	

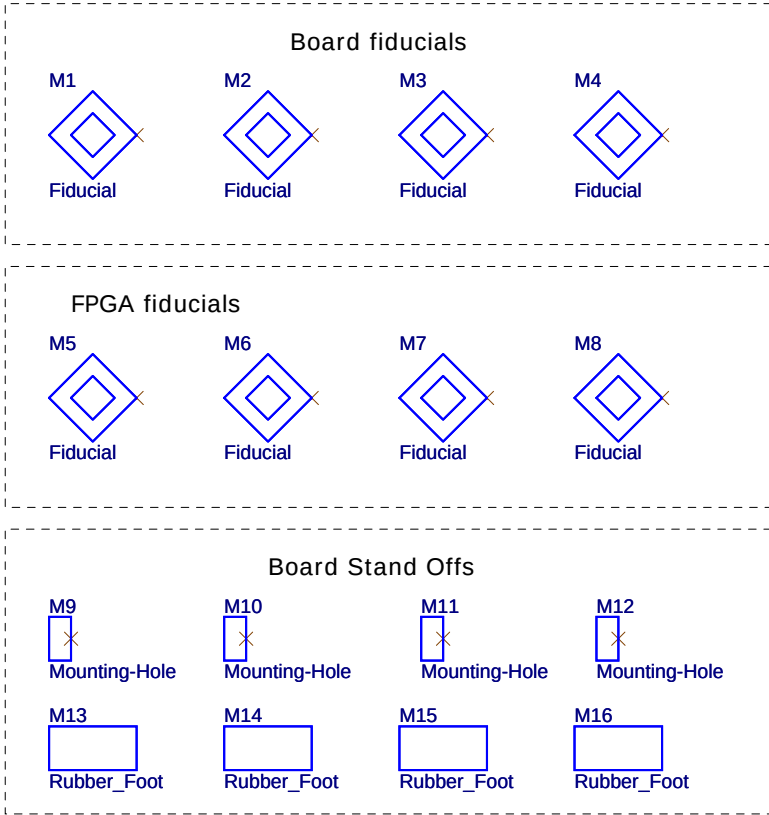

Schematic				
sch_top		Manufacturing Points		
Title				
IGLOO - Nano Starter Kit				
Size	Document Number			Rev
A	SCH-AGLNNANO-0845-B1B			1B
Date:	Saturday, November 08, 2008		Sheet	9 of 9