Rogue Fin Design: Summary Report

Author: Siddhartha Somadder, Flight Dynamics — Last updated [10.21.2026]
Repository: `https://github.com/sidd-somadder/rogue-fin-design`

This report summarizes the fin redesign for NYU Rogue Aerospace's 2026–27 FAR-OUT rocket; the full record of each decision is in the working design logbook. The goal is to reduce fin planform area, and with it fin drag, while meeting the competition's stability and damping requirements and the team's flutter margin. Three design iterations are complete. The current fin is sized for the full-scale rocket, which reaches $M \approx 0.67$, and will first fly on the November 8 sub-scale launch.

Requirements

Requirement	Value	Source	Evaluated at
Static stability	≥ 1.5 cal, rail exit to burnout	FAR-OUT 5.1.5	20 mph wind, 15% turbulence, worst case of 30 runs (stricter than the rule, which gives no wind speed)
Damping ratio	$0.03 \leq \zeta \leq 0.5$ (0.05–0.3 recommended)	FAR-OUT 5.1.5	30 mph wind; rail exit and coast minimum
Flutter	$V_f \geq 2\,V_{max}$	Team	NACA TN 4197 with conservative inputs
Root chord	1–2 cal (5–10 in)	Aerostructures	Bonding area and root bending

All flights are simulated in OpenRocket with a 600 in rail at 40 °F and the launch-site altitude of 410 ft.

Approach

1. **Size for rail exit.** Rail exit in a crosswind, not nominal flight, sets the fin size, so candidates are sized to the smallest area whose worst-case rail-exit stability over repeated turbulent simulations meets 1.5 cal.
2. **Check flutter and damping.** Flutter speed from NACA TN 4197; damping ratio from `damping.py`, built on Mandell's equations with a compressibility correction.
3. **Trade study.** Passing candidates are compared on estimated skin-friction drag, flutter margin, and manufacturability. Simulated apogee was dropped as a metric because its run-to-run scatter (about 17 ft) exceeded the differences between candidates.
4. **Cross-section study.** Edge treatments are compared by XFOIL viscous analysis where it converges and by 2D CFD in ANSYS Fluent where it does not, weighed against manufacturing effort and repeatability.
5. **Freeze & Verify.** Hand design to Aerostructures for FEA and also verify with 3D CFD. Reach a consensus between teams on where the part fails and needs a redesign, if any.
6. **Manufacture and Launch.** Once agreed upon, the fin will be manufactured via initial wood panel operations and then carbon fiber layups. Validate performance against sub-scale flight data.

Current Design (Iteration 3)

A 7.5 in root × 2.5 in tip × 5.0 in height cropped delta with a 0.25 in wood core and tip-to-tip carbon fiber, keeping the team's 45° chamfered edges because late material deliveries left no time for a new cross-section. Among the passing candidates, it was chosen over a 7.5 in/3 in tip (equal stability within 0.02 cal, more drag) and over 2 in tips (too little material for a longer edge treatment later). A 6×2×5.5 fin with better stability and drag was rejected for its short root and long span, which reduce bonding area and raise root bending stress.

Iteration History

Iteration	Selected planform (in)	Area (in^2)	Outcome and reason for closing
1 (9/30–10/6)	7×3×4	20.0	Sized to a 15% area-reduction target; drag −12.0%, flutter margin 4.4. Closed: an area target does not find the minimum fin, and stability was in percent, not the rules' calibers.
2 (10/7–10/15)	5.5×3×4.25	18.06	Re-sized to the rail-exit requirement at 30 mph: 1.58 cal minimum over 20 runs (baseline 1.29, failing), area −24.8%, drag −16.4%, flutter margin 4.6; 7° double wedge. Closed when leadership asked for fins designed to full scale.
3 (10/15–)	**7.5×2.5×5**	**25.0**	Sized against the full-scale 10×2×5 fins (30.0 in^2): rail-exit minimum 1.66 cal, area −16.7%, drag −11.8%, flutter margin 3.5 vs. 3.1, coast $\zeta \approx 0.06$. 45° chamfer for the sub-scale.

Planforms are root × tip × height; Iterations 1–2 compare to last year's sub-scale fins (9×3×4, 24 in^2).

Key Findings/Lessons

- **Read the rules first.** Iteration 1 was sized to an area goal before the rules were read in detail; the rail-exit requirement in calibers changed the design driver entirely.
- **Fin height drives stability; chord drives drag less than area suggests.** Estimated drag falls about 0.7 times as fast as area, because shorter chords raise both the friction coefficient and the thickness ratio. Height is the most effective stability lever but raises root bending.
- **Simulation tools need independent checks.** An OpenRocket damping listener measured moment arms from the nose tip instead of the CG, overstating ζ about fourfold. The independent tool, with Mandell's aspect ratio corrected to the fin plus its mirror image, matches OpenRocket's normal-force slope within 1%.
- **XFOIL fails on sharp edges.** Its viscous solver does not converge on chamfered sections, so those comparisons move to CFD, validated first against XFOIL on the NACA 0005.
- **Manufacturing limits the cross-section.** Knife-edge leading and trailing edges snapped during sanding, so edges must keep a small flat or a rounded leading edge.

Tools


`damping.py` (damping ratio over a simulated flight), `drag_estimate.py` (strip-summed skin-friction drag), `flutter.py` (NACA TN 4197), `profile_gen.py` (section coordinates), and `xfoil_wrapper.py` (batch XFOIL runs). The first two are documented in *Rocket Damping* and *Preliminary Fin Drag Study*.

Next Steps

- **Sub-scale flight (Nov. 8):** compare measured apogee and stability with OpenRocket predictions.
- **Iteration 4 cross-section:** attempt prototyping a rounded leading edge and beveled trailing edge with ShopBot machining and a jig; run drag comparison in validated 2D CFD.
- **Full-scale checks:** rerun flutter at the maximum-velocity altitude with the carbon-fiber skins, confirm the static margin through burnout as the hybrid's CG shifts, and complete the root FEA. Possibly develop more precise flutter estimate technique.

DESIGN SELECTION:

1. 7.5 inch root × 2.5 inch tip × 5 inch height cropped delta planform
2. 45° double wedge cross section.

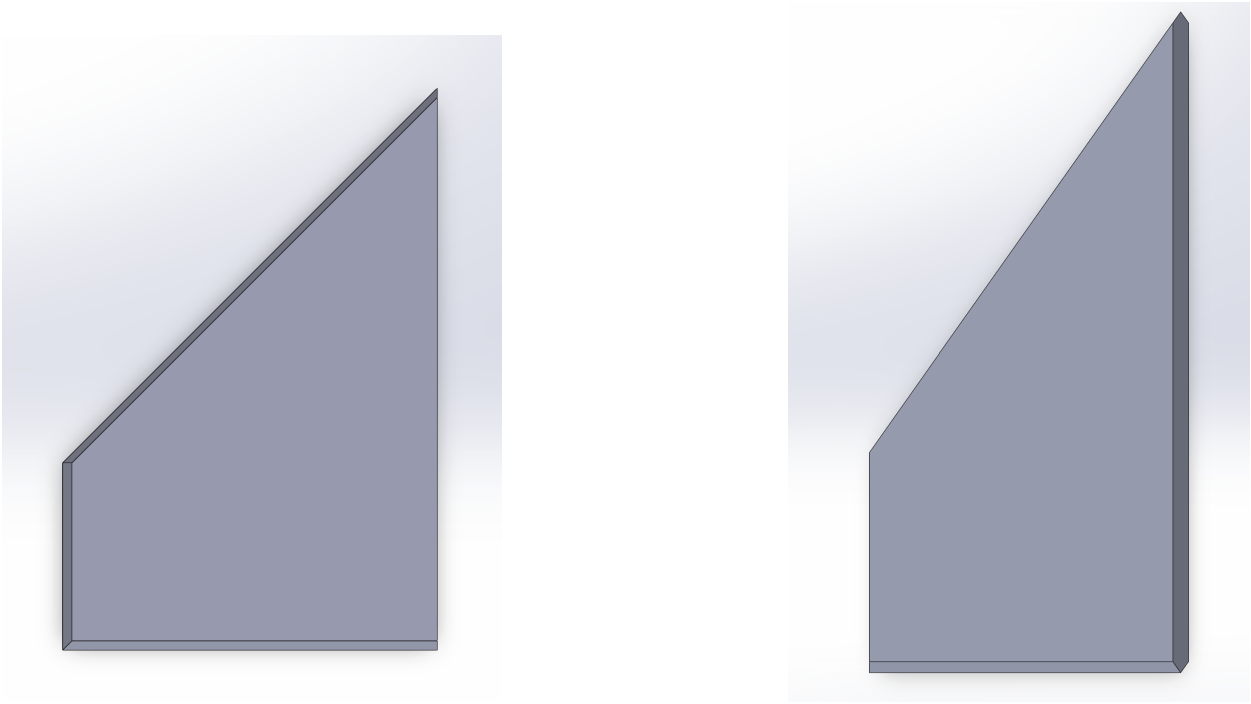

(a) Top view (b) Auxiliary view

Figure 1: Iteration 3 fin geometry: 7.5×2.5×5.0 in planform with 45° double-wedge cross-section.