Exp-10 A.) Internetworking with Router

Aim:-

Internetworking with routers in CISCO PACKET TRACER simulator.

Procedure:-

Step1:- Configuring Router

1.) open cisco packet tracer & place one router & 2 PC's

2.) Select the router & open the CLI, and press enter to access the command prompt.

3.) Enter privileged mode using enable.

4.) Enter global config.

5.) Configure Fast-Ethernet 0/0 with:

* IP address : 192.168.10.1
* Subnet mask : 255.255.255.255

6.) Use no shutdown to active the interface

7.) Configure Fast Ethernet 0/1 with

* IP address : 192.168.20.1
* Subnet mask : 255.255.255.0

Step-2 Configuring PC's

PC0 → 192.168.10.2


PC1 → 192.168.20.2

Scanned with OKEN Scanner

Step 3: Connecting PC's with router.

+ Connect PC0 Ethernet 0 to router, FastEthernet0/0 using a copper straight Cable.

* Connect PC1 Ethernet 0 to Router, FastEthernet 0/1 using a copper straight Cable.

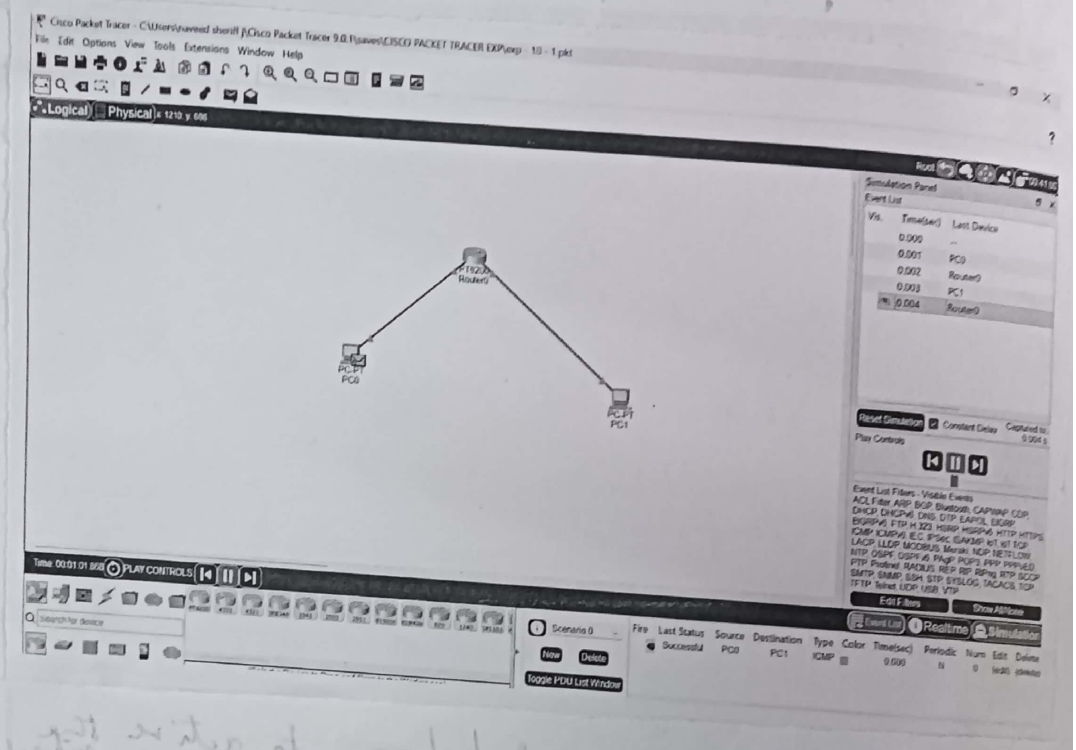

Result:

Thus, a simple internetworking was successfully designed & configured using a router.

B:) Interneteorking using Wireless router.

Aim:-

To design & configure an internetwork using a wireless router, DHCP server & Internet cloud in Cisco Packet tracer.

Procedure:-

Step-1:- Build the network topology.

* open cisco packet tracer & add devices like PC, Router, laptop, cable modem, internet cloud & server.
* Connect the devices using appropriate cable.

Step-2:- Configure the Router

* Wireless Router → GUI → Wireless Network name → Homenetwork.
* Go to setup tab & Ensure DHCP is enabled.
* Configure the server as 208.67.220.220.
* Save the settings.

Step-3:- Configure the laptop.

* Laptop → Physical tab → power off → Remove Ethernet and add WPC300N wireless module
  ↳ Power on the laptop.
* Desktop → PC. select the connect tab & select Homenetwork.
* Connect the laptop to the wireless network

Step-4:-

Configure the PC

Step-5:- Configure the Internet cloud.

* Open the Internet cloud
* Config → Cable.
* set :- From port → Coaxial
  To port → Ethernet
* Click Add
* Go to Ethernet * select cable as Provider network

Step-6:- Configure the cisco.com server.

DHCP configuration.

Parameter	Value
PoolName	DHCP Pool
Default gateway	208.67.220.220
DNS Server	208.67.220.220
Starting IP	208.67.220.1
Subnet mask	255.255.255.0
Maximum user	50

Click Add.


DNS Configuration

Parameter	Value.
Name	cisco.com
Type	A Record
Address	208.67.220.220

Click Add

Step-1

Verify Connectivity.

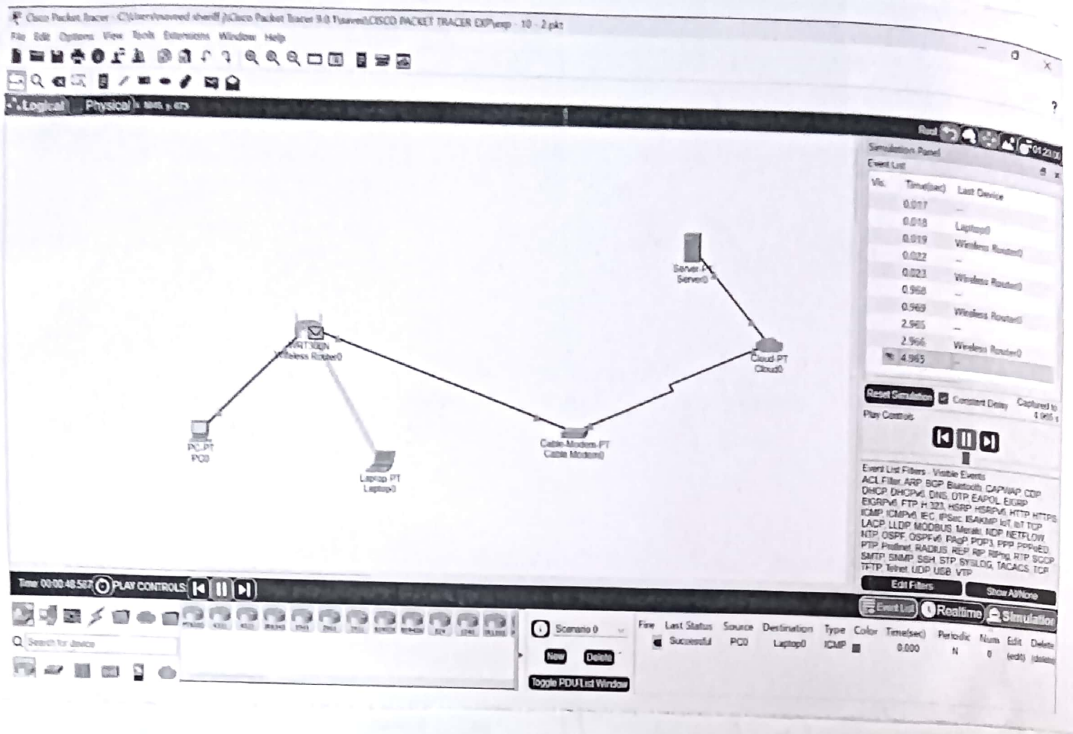

Result :-

Thus the Wireless router, DHCP server, Internet cloud were successfully configured in Cisco packet tracer.

Scanned with OKEN Scanner