Exp-11 A.) Static Routing.

Aim:-

To simulate & configure static routing using Cisco packet tracer.

Procedure:-

* Open cisco packet tracer & create the topology.

* Configure the IP addresses on router interface & PC's.


* Configure the static routes for networks 30.0.0.100/32 & 50.0.0.0/8 using Router 1 as the primary route.

* Configure the separate host route for 30.0.0.100/32 with router 2 as the primary route & router 1 as backup route.

* On router 1, configure static routes for networks 10.0.0.0/8 & 40.0.0.0/8.

* On router 2, configure static routes for networks 10.0.0.0/8 & 30.0.0.0/8

* Use the command: show ip route static to verify the configured static routes.

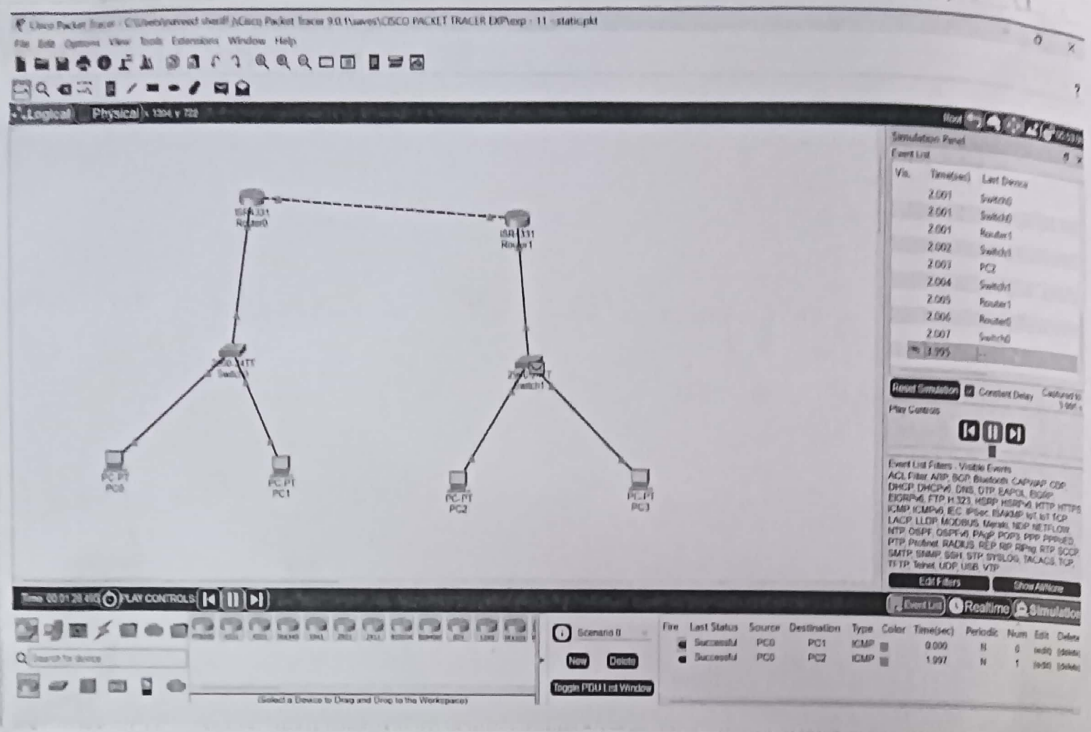

Result:-

Thus, the routing with primary & backup routes was successfully configured & simulated.

B) RIP (Routing Information protocol)

Aim:

To simulate & configure RIP using cisco packet tracer.

Procedure:


* Open cisco packet tracer & create the topology.
* Assign IP addresses to PC's & router interface.
* Configure the fastethernet & serial interfaces of all routers.
* Use no shutdown to active.
* For DCE serial interfaces, configure the required clock rate & bandwidth.
* Configure RIP on R0 using:

```
router rip
network 10.0.0.0
network 192.168.1.250
```

* Configure RIP on R1 using:

```
router rip
network 192.168.1.244
network 192.168.1.248
```

* Allow RIP to exchange routing info.
* From PC0, ping command to verify connectivity with PC1.

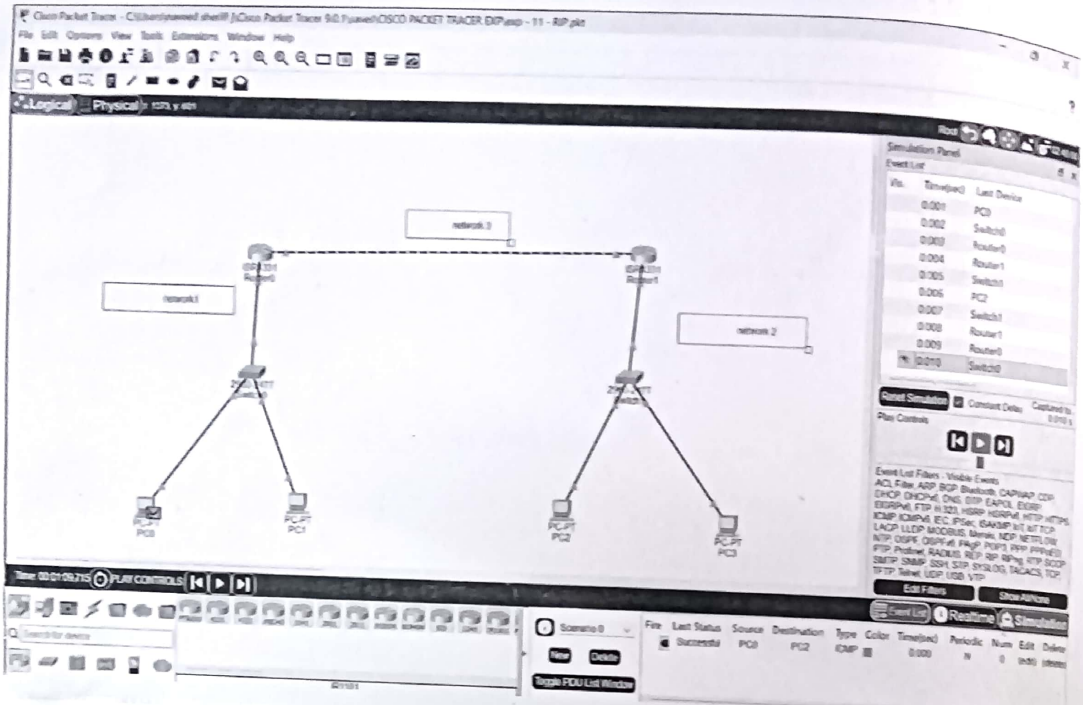

Result :-

Thus RIP was successfully configured & simulated using cisco packet tracer.