Exp-3
30/7/24

CISCO PACKET TRACER Simulation

Aim: To Analyse the behaviour of network devices using CISCO PACKET TRACER Simulator.

Procedure:

i) From the network component box, click and drag-and-drop the below Components:

a) 4 Generic PC's and One HUB

b) 4 Generic PC's and one switch.

ii) Click on Connections:

a) Click on Copper Straight-Through Cable.

b) Select one of the PC and connect it to HUB using the Cable. The link LED should glow in green, indicating that the link is up. Similarly connect remaining 3PC's to the HUB.

c) Similarly connect 4PC's to the switch using copper straigh-through Cable.

Scanned with OKEN Scanner

3) Click on the PC's connected to hub, go to the Desktop tab, click on IP configuration and enter an IP Address and subnet mask. Here, the default gateway and DNS Server information is not needed as there are only two end devices in the network.

Click on the PDU (message icon) from the common tool bar,


a) Drag and drop it on one of PC (source machine) and drop it on another PC (destination machine) connected to the HUB.


4) Observe the flow of PDU from source PC to destination PC by selecting the Realtime mode of simulation.

5) Repeat step 3 to step 5 for the PC's connected to the switch.

6) Observe how HUB and switch are forwarding the PDU and write your observation and conclusion about the behaviours of switch and HUB.

output:-

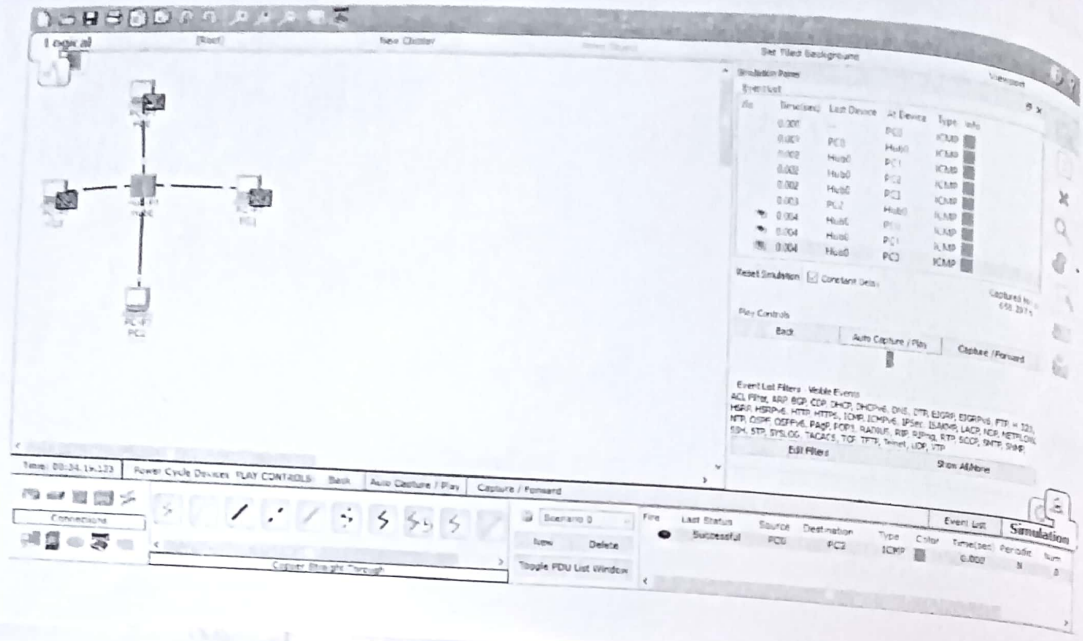

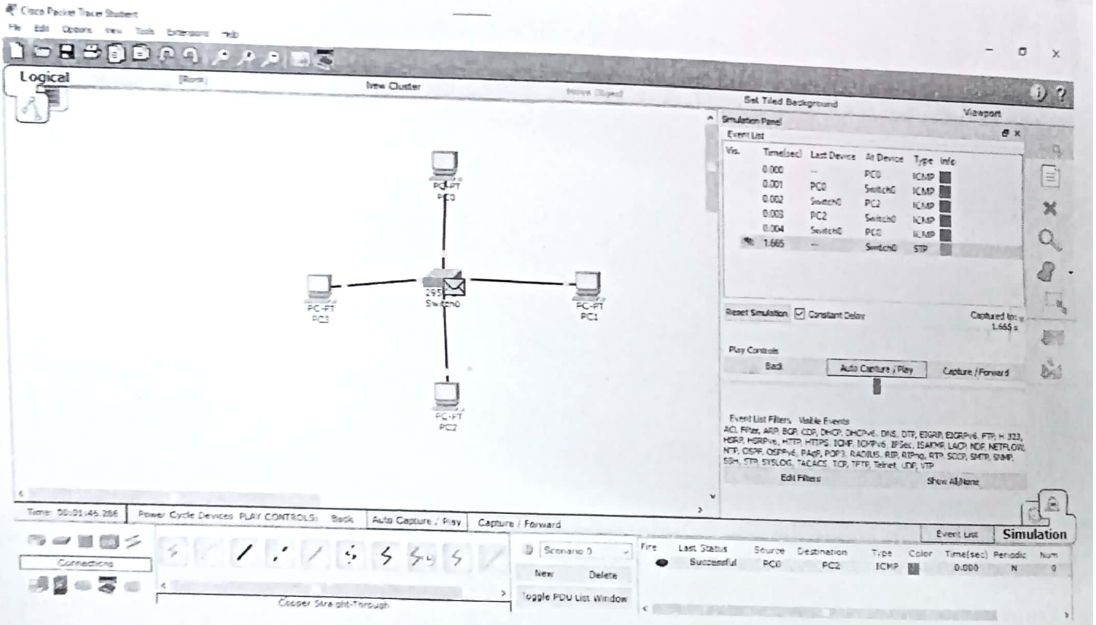

Result:- Thus to Analyse the behaviour of network devices using CISCO PACKET TRACER Simulation is studied and implemented successfully.

Scanned with OKEN Scanner