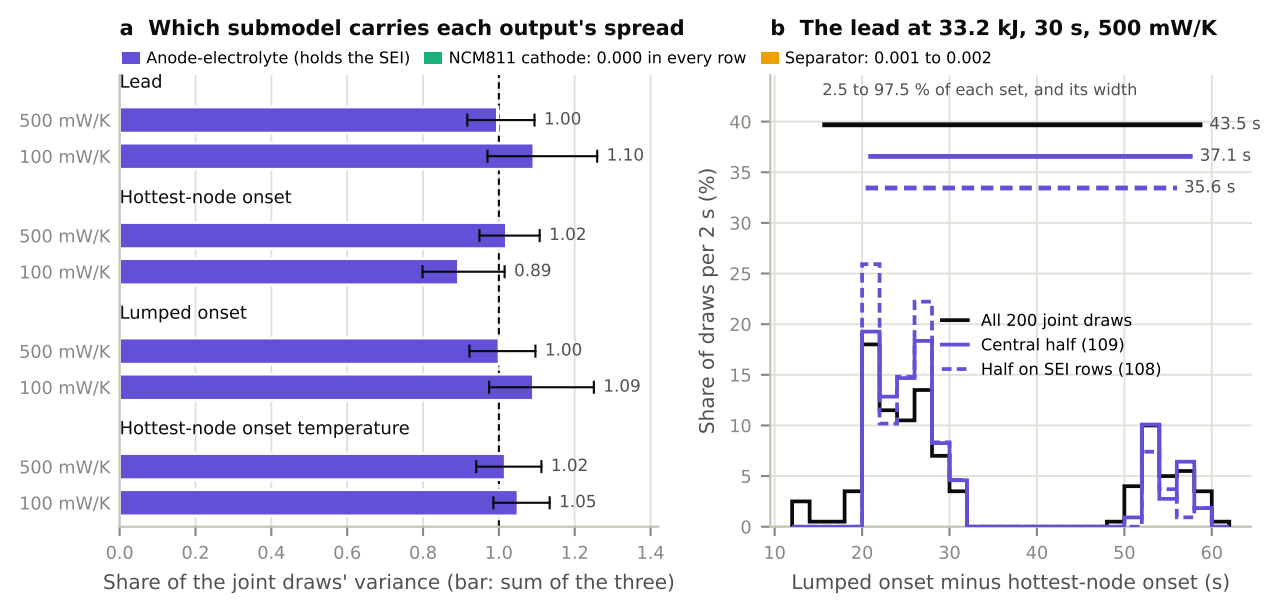
a Which submodel carries each output's spread
Anode-electrolyte (holds the SEI)
NCM811 cathode: 0.000 in every row
Separator: 0.001 to 0.002
Lead
500 mW/K
100 mW/K
1.00
1.10
Hottest-node onset
500 mW/K
100 mW/K
1.02
0.89
Lumped onset
500 mW/K
100 mW/K
1.00
1.09
Hottest-node onset temperature
500 mW/K
100 mW/K
1.02
1.05
0.0
0.2
0.4
0.6
0.8
1.0
1.2
1.4
Share of the joint draws' variance (bar: sum of the three)
b The lead at 33.2 kJ, 30 s, 500 mW/K
2.5 to 97.5 % of each set, and its width
43.5 s
37.1 s
35.6 s
All 200 joint draws
Central half (109)
Half on SEI rows (108)
Share of draws per 2 s (%)
0
5
10
15
20
25
30
35
40
10
20
30
40
50
60
Lumped onset minus hottest-node onset (s)