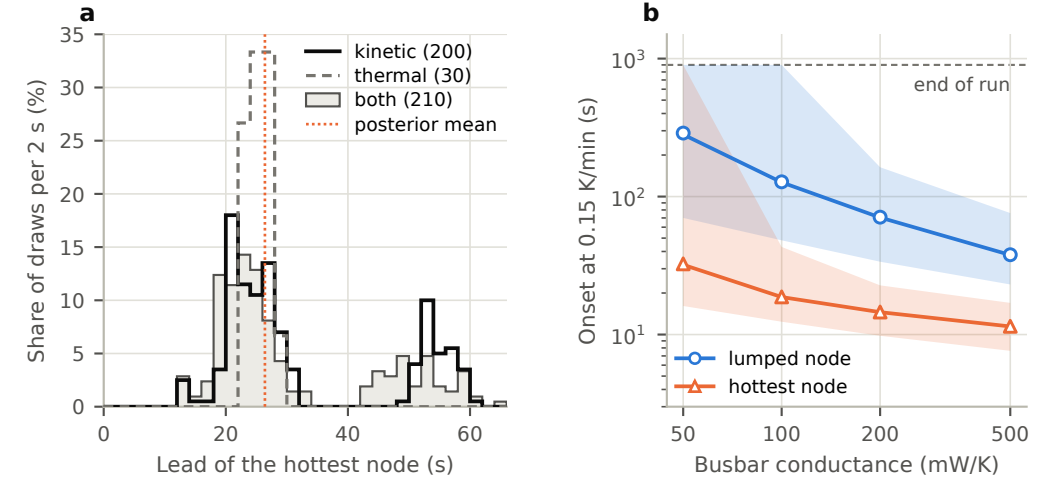
a
Share of draws per 2 s (%)
Lead of the hottest node (s)
kinetic (200)
thermal (30)
both (210)
posterior mean
b
Onset at 0.15 K/min (s)
Busbar conductance (mW/K)
end of run
lumped node
hottest node