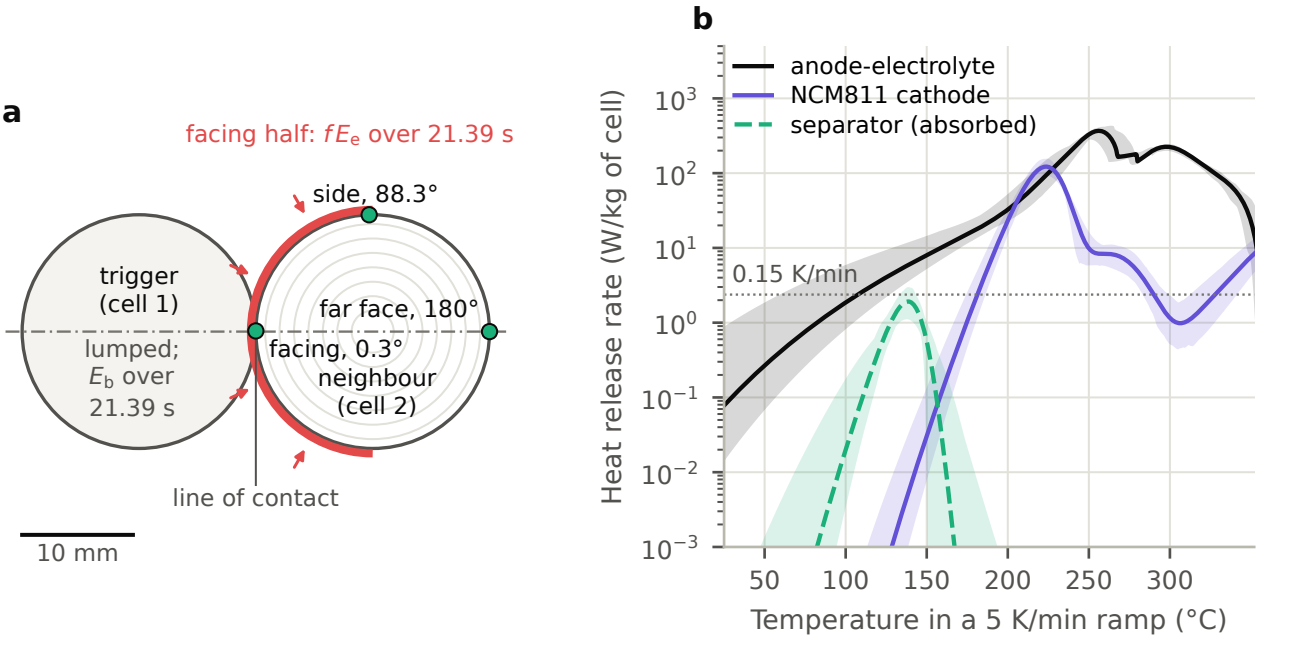

a
facing half: fE_e over 21.39 s
side, 88.3°
trigger
(cell 1)
lumped;
E_b over
21.39 s
far face, 180°
facing, 0.3°
neighbour
(cell 2)
line of contact
10 mm
b
anode-electrolyte
NCM811 cathode
separator (absorbed)
0.15 K/min
Heat release rate (W/kg of cell)
10^3
10^2
10^1
10^0
10^{-1}
10^{-2}
10^{-3}
50
100
150
200
250
300
Temperature in a 5 K/min ramp (°C)