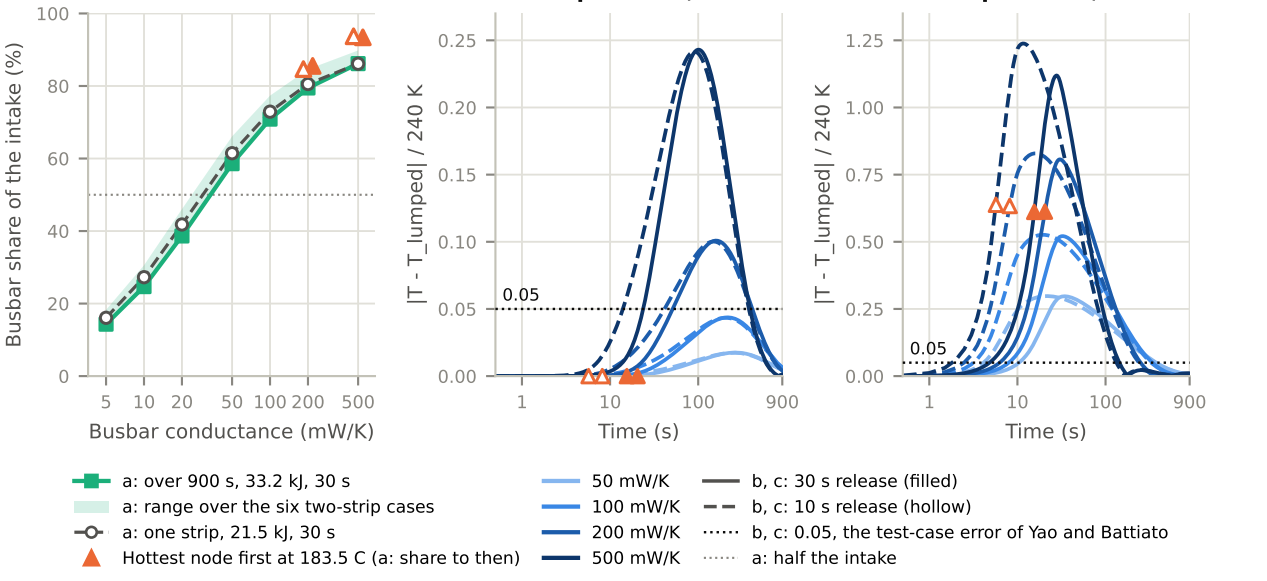
a How the heat arrives
Busbar share of the intake (%)
Busbar conductance (mW/K)
b Lumped error, mean
|T - T_lumped| / 240 K
Time (s)
0.05
c Lumped error, hottest node
|T - T_lumped| / 240 K
Time (s)
0.05
a: over 900 s, 33.2 kJ, 30 s
a: range over the six two-strip cases
a: one strip, 21.5 kJ, 30 s
Hottest node first at 183.5 C (a: share to then)
50 mW/K
100 mW/K
200 mW/K
500 mW/K
b, c: 30 s release (filled)
b, c: 10 s release (hollow)
b, c: 0.05, the test-case error of Yao and Battiato
a: half the intake