


DAY-3

Tasks

1.

Log in to your home Wi-Fi router's admin panel using its default IP address (usually 192.168.0.1 or 192.168.1.1) and take a screenshot of the login page.

Hint: If you don't know your router's IP, open Command Prompt and run 'ipconfig' — look for 'Default Gateway'.

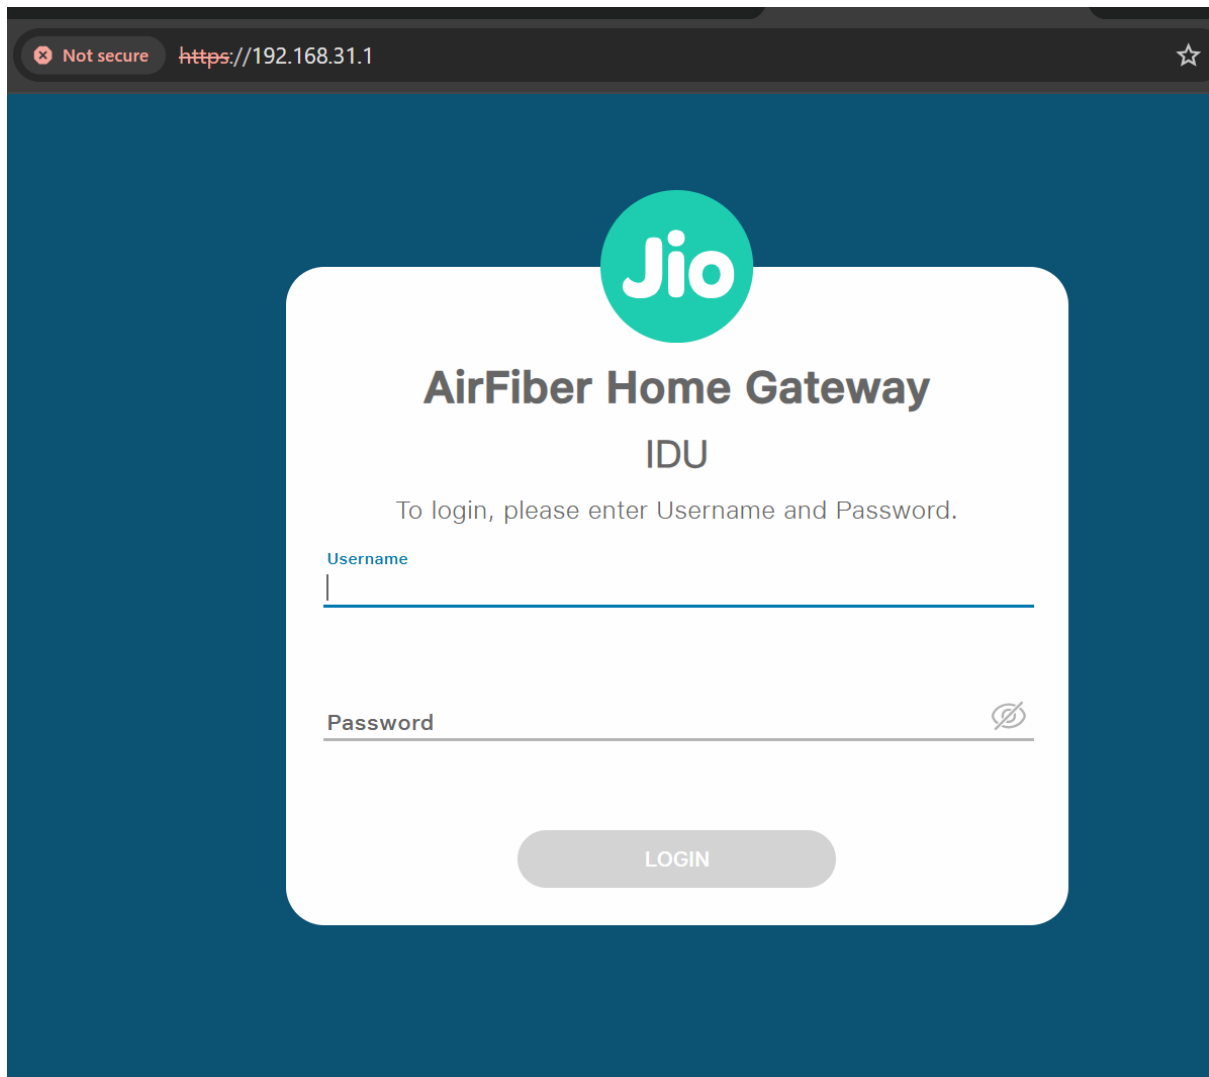

2.

Find and note down the current IP address, subnet mask, and default gateway assigned to your laptop or mobile device when connected to your Wi-Fi network.


Wireless LAN adapter Wi-Fi:

```
Connection-specific DNS Suffix . : lan
IPv6 Address. . . . . : 2409:4090:1047:a819:ce1a:2c01:b705:af2e
Temporary IPv6 Address. . . . . : 2409:4090:1047:a819:2548:de5b:30f7:5867
Link-local IPv6 Address . . . . . : fe80::ee21:6767:eae:60cf%18
IPv4 Address. . . . . : 192.168.31.53
Subnet Mask . . . . . : 255.255.255.0
Default Gateway . . . . . : fe80::caa3:e8ff:fe6a:e10f%18
                          192.168.31.1
```

3.

Change your device's IP address from 'Obtain IP automatically' (DHCP) to a static IP in the same range as your router (for example, set it to 192.168.1.50 if your router is 192.168.1.1), and test if you still have internet access.

Constraint: Remember to revert to automatic/DHCP after testing to avoid network issues.

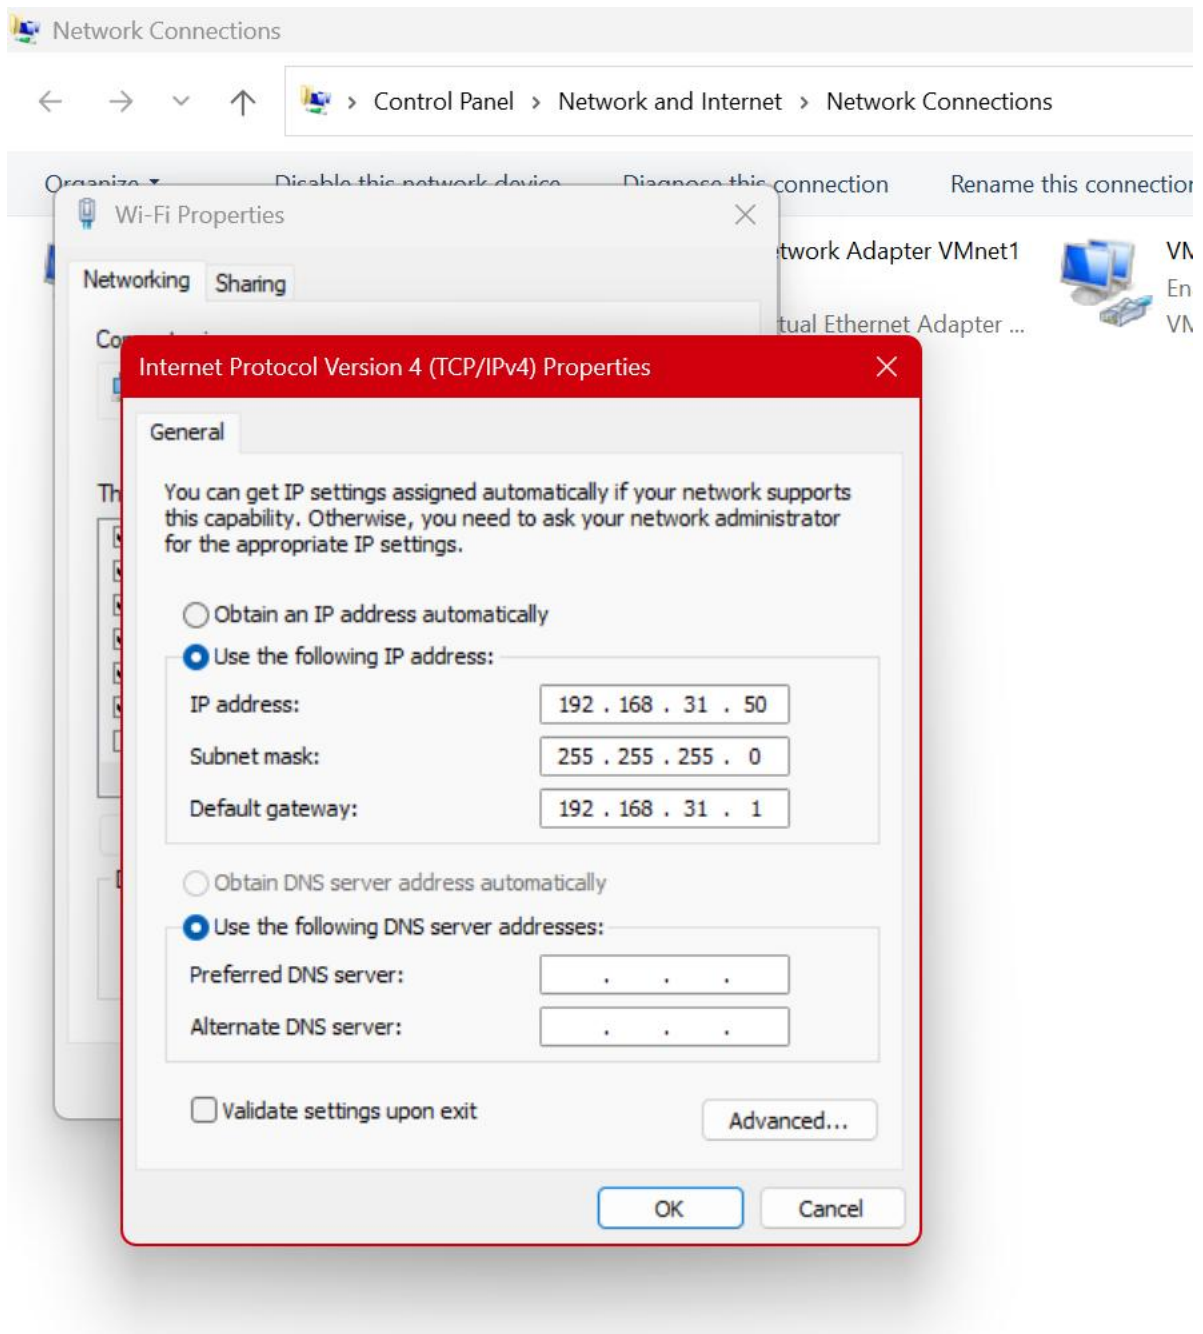

4.

In your router's admin panel, locate the section where you can view or change the DHCP range. Write down the current range, and explain in 2-3 lines what would happen if two devices are assigned the same IP address in this range.

Now log into:

192.168.31.1

Look through the router menus for:

Advanced → Network → LAN → DHCP Server

or simply:

DHCP Server

You should eventually find something like:

DHCP Server: Enabled

Start IP Address: 192.168.31.100

End IP Address: 192.168.31.200

Write down the numbers **your router actually shows**.