



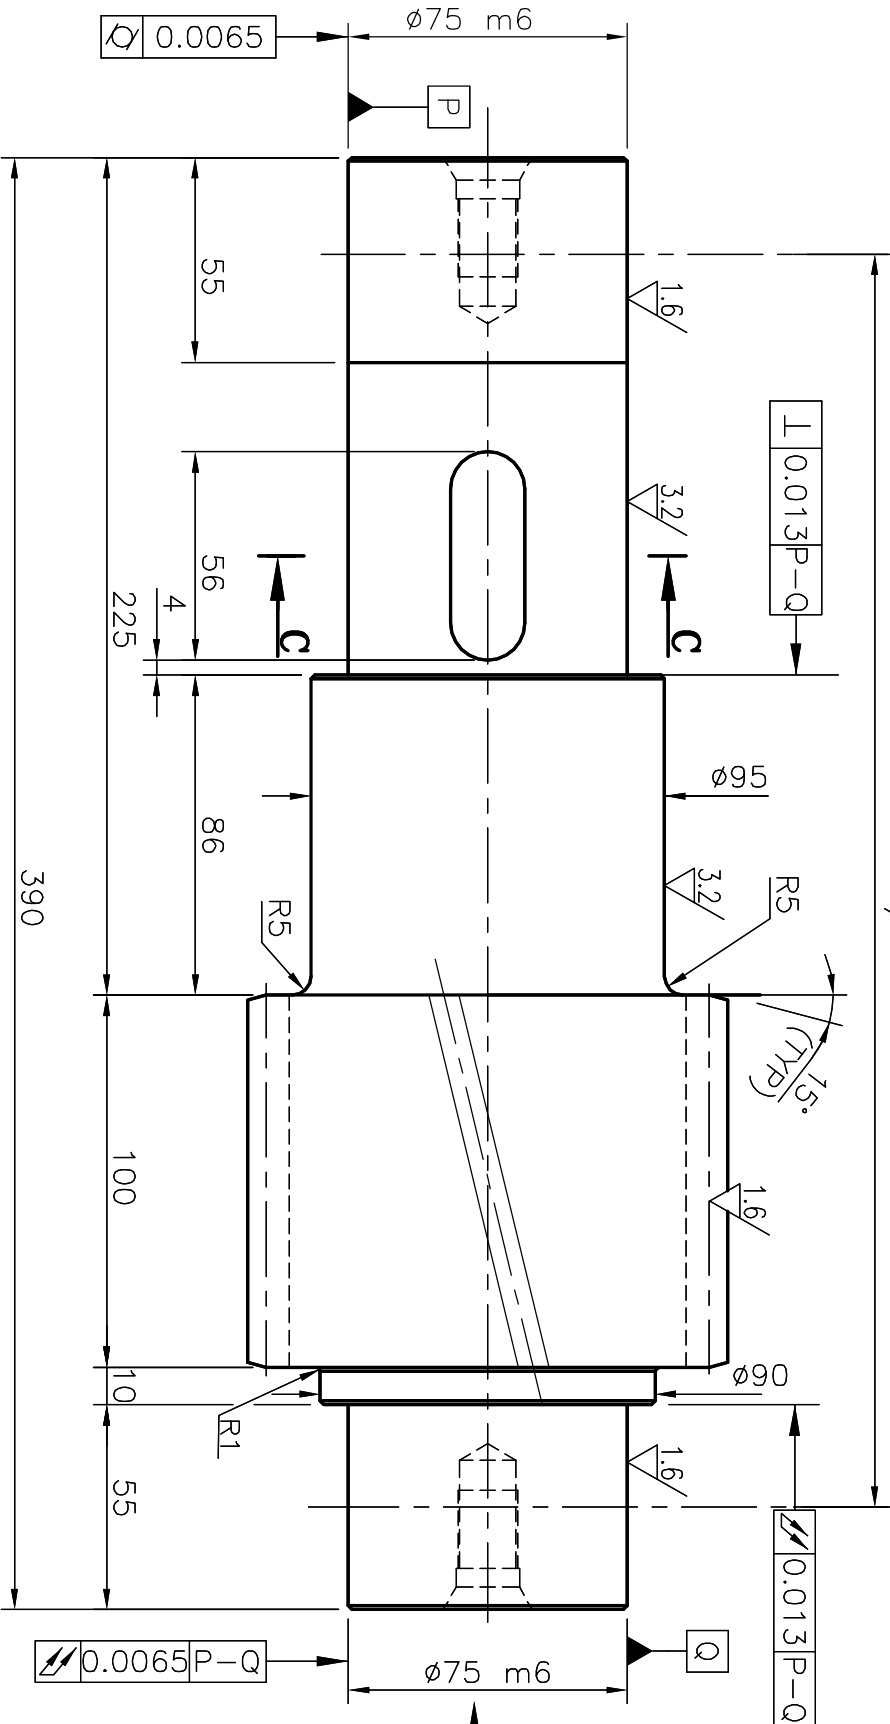

TOL. ON FIT	TOL. IN mm.
20 N9	0.000 -0.052 +0.030
75 m6	+0.011 +0.011

VIEW B

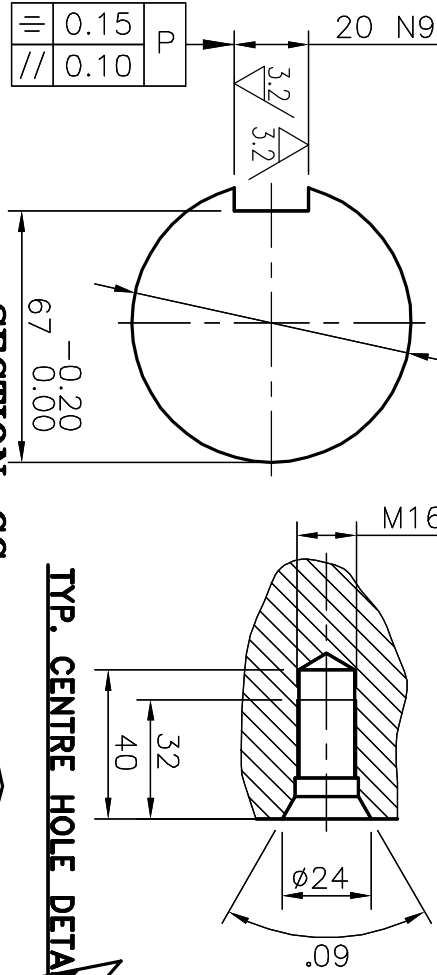

TYP. CENTRE HOLE DETAIL

SECTION-CC

TOL. ON FIT	TOL. IN mm.
32 u9	+0.031 -0.031
110 H7	+0.035 0.000

NOTES :-

- PART SHALL BE FREE FROM ALL KINDS OF DEFECTS.
- UNSPECIFIED RADII SHALL BE NOT MORE THAN 2mm.
- UNSPECIFIED CHAMFERS SHALL BE NOT MORE THAN 1X45°.
- ALL SHARP EDGES TO BE SMOOTHLY ROUNDED OFF.
- REMOVE BURRS AFTER MACHINING.
- PINION AND GEAR SHALL BE CHANGED IN PAIR ONLY

MATERIAL SPECN. :-

- ALTERNATIVE MATERIALS FOR PINION/GEAR :
 - 17NiCrMo6 ISO 683(11)-1987
 - 815H17 BS 970(1)-1991
 - 8620 SAE J403-1994


HEAT TREATMENT :-

- PINION AND GEAR TOOTH TO BE CASE HARDENED TO HRC 58±2 AND GROUND.

PART No.	DESCRIPTION	DRG. No./SPECN.	MATERIAL SPECN.	QTY.	UNIT	TOTAL	REMARKS/CATALOGUE No.
20.	2nd INT. GEAR(Z=64,m=5) OD 341.03 X ID 110 X 90 THK.		ALLOY STEEL 15Ni5Cr4Mo1 IS:4432-2004	1	29.61	29.61	
17.	1st INT. PINION SHAFT(Z=23,m=5) OD 128.97 X 390 LG.		ALLOY STEEL 15Ni5Cr4Mo1 IS:4432-2004	1	25.18	25.18	

ALL DIMENSIONS ARE IN mm.
TOL. AS PER- IS:919 AND IS:2102
SUR. FINISH IN MICRONS IS:10719

1st. INTERMEDIATE PINION SHAFT &
2nd. INTERMEDIATE GEAR OF DRIVE GEAR

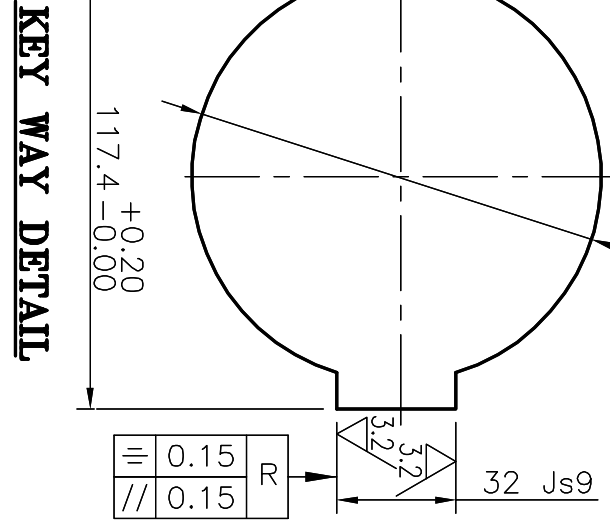

KEY WAY DETAIL

REVISION	DATE	APD.	SKD.	SIGNATURE	REF. DRG. No.	REV/NO.
JOB No.	SCALE: 1:2	DATE	DRN.			
TOTAL Wt. (kg)	54.79	SHEET SIZE: A2	APD.			0